



<http://www.ebiz-tcf.eu>

DRAFT

IMPLEMENTATION GUIDE  
TRANSACTION "FASHION COMMISSION ORDER"

Version: draft

Date of release: 26/6/2023

Document code: G040

technical Documentation: <http://www.ebiz.enea.it>

XML Schemas repository: <http://www.ebiz.enea.it/moda-ml/repository/schema/draft/default.asp>

Guides repository: <http://www.ebiz.enea.it/moda-ml/repository/guide/draft/default.asp>

Guide filename: G040-eBIZ-FashionCommissionOrder.pdf

## 0. PREMISE

This document contains a proposal for the updating and extension of eBIZ specifications starting from the eBIZ version 2018. Under the name of 'Draft version' it is reported the result of an extensive work of analysis and consultation aimed at developing and maintaining eBIZ specifications.

In particular, the content of this proposal is the result of various activities, mainly those carried out within the framework of the **TRICK project** funded by the European Commission: grant agreement 958352, call H2020-LOW-CARBON-CIRCULAR-INDUSTRIES-2020 / H2020-LCCI-2020-EASME-twostage.

The technical contents are backwards compatible with the latest official published version, with the exclusion of the totally new concepts added explicitly for the version that are thought as incremental evolution of the knowledge base.

## 1. BUSINESS DESCRIPTION

### 1.1 Scope

This guide is intended to illustrate the standard XML form of the "FASHION COMMISSION ORDER" document type to companies in the fashion sector, providing instructions for their use in the electronic commerce context between fashion subcontractors and their customers as illustrated in the enclosed diagram

All the rules necessary for the construction and validation of the document are expressed through a specific XML schema, which is presented in detail in paragraph 3.

### 1.2 Generalities

The FASHION Commission Order is used by the commissioner Company to commit to a Sub-contractor

Each commission order can include one or more operations of the manufacturing cycle, each one corresponding to a line item

The document can be used either to order the manufacturing of finished goods or of component parts of them.


When the Commissioner orders a sequence of operations to different Sub-contractors, he can use this document also to dispose the delivering of semifinished goods from one Sub-contractor to the next.

This document specifies only the technology (when necessary) and the characteristics of the final product and of the initial goods (components) to be used in the manufacturing; it can also give directives that involve also n<sup>th</sup>-tier sub-subcontractors in order to be compliant with requirements like CITES or Country of Origin

The output product specified in each line item can be the inputcomponent in a following line item also in the same Commission order.

### 1.3. Possible scenario

Subcontracted fashion manufacturing

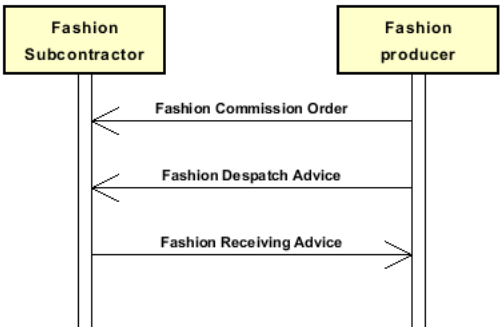

## 2. IMPLEMENTATION GUIDE

### 2.1 General structure of XML document

All the business data that can be exchanged through this class of documents are shown in the following "document structure", that provides a simplified vision of the Schema.

In particular:

- the two numbers following each element define its "cardinality" (minimum and maximum number of occurrences); the minimum equal zero indicates that the element is optional, the minimum greater than zero indicates that is mandatory;
- the bold character denotes the complex elements (aggregates of simple elements) that were built for the sake of functionality and re-usability of some complex informations sets. The child elements in each parent element are easily spotted as "indented";
- the symbol "@" denotes an attribute of the preceding element; here "the usage indicator (optional, required, ...)" is shown in square brackets.

### Structure

#### KnitClothOrder

```
@msgfunction [Optional] [Default= OR]
@version [Optional] [Default= draft]
@useProfile [Optional]
@KCCOtype [Optional]
| KCCOheader 1-1
| | msgN 1-1
| | - choose -
| | | msgID 0-1
| | | - or -
| | | docID 0-1
| | | @numberingOrg [Optional]
| | | - end choose -
| | | msgDate 1-1
| | | @dateForm [Optional]
| | | season 0-1
| | | @numberingOrg [Optional]
| | | @codeList [Optional]
| | | @listName [Optional]
| | | @listVersion [Optional]
| | | msgCurrency 0-1
| | | validityStart 0-1
| | | @dateForm [Optional]
| | | validityEnd 0-1
| | | @dateForm [Optional]
| | | refDoc 0-9
| | | @docType [Required]
| | | | docID 1-2
| | | | @numberingOrg [Optional]
| | | | docDate 0-1
| | | | @dateForm [Optional]
| | | | season 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | itemID 0-1
| | | | attachment 0-1
| | | | @uid [Optional]
| | | | | fileName 0-1
| | | | | @numberingOrg [Optional]
| | | | | binaryObject 0-1
| | | | | @format [Optional]
| | | | | @mime [Optional]
| | | | | @encoding [Optional]
| | | | | @characterSet [Optional]
| | | | | externalReference 0-99
| | | | | | uri 1-1
| | | | | | @isURL [Optional] [Default= true]
```

- | mimeCode 0-1
- | formatCode 0-1
- | encodingCode 0-1
- | characterSetCode 0-1
- | hashFootprint 0-1
- | @schemeID [Optional]
- | @hashMethod [Required]
- | **blockChainReference 0-9**
- | uri 1-1
- | @isURL [Optional] [Default= true]
- | transactionReceipt 1-9

**buyer 1-1**

- | @logo [Optional]
- | @sender [Optional]
- | id 1-1
- | @numberingOrg [Optional]
- | additionalIdentifier 0-9
- | @numberingOrg [Optional]
- | @idQualifier [Optional]
- | legalName 0-1
- | dept 0-1
- | subDept 0-1
- | person 0-1
- | @email [Optional]
- | @phone [Optional]
- | @fax [Optional]
- | street 0-1
- | city 0-1
- | subCountry 0-1
- | country 0-1
- | postCode 0-1
- | **geoCoordinates 0-1**
- | @um [Optional] [Default= DEGD]
- | @geoRefSystem [Optional]
- | xGeoCoord 1-1
- | yGeoCoord 1-1
- | zGeoCoord 0-1

**subContractor 1-1**

- | @sender [Optional]
- | id 1-1
- | @numberingOrg [Optional]
- | legalName 0-1
- | dept 0-1
- | subDept 0-1
- | person 0-1
- | @email [Optional]
- | @phone [Optional]
- | @fax [Optional]
- | street 0-1
- | city 0-1
- | subCountry 0-1
- | country 0-1
- | postCode 0-1
- | **geoCoordinates 0-1**
- | @um [Optional] [Default= DEGD]
- | @geoRefSystem [Optional]
- | xGeoCoord 1-1
- | yGeoCoord 1-1
- | zGeoCoord 0-1

**thirdParty 0-5**

- | @VAT [Optional]
- | @role [Required]
- | @sender [Optional]
- | id 1-1
- | @numberingOrg [Optional]
- | legalName 0-1
- | dept 0-1
- | subDept 0-1

- | | | person 0-1
- | | | | @email [Optional]
- | | | | @phone [Optional]
- | | | | @fax [Optional]
- | | | street 0-1
- | | | city 0-1
- | | | subCountry 0-1
- | | | country 0-1
- | | | postCode 0-1
- | | | | **geoCoordinates 0-1**
- | | | | | @um [Optional] [Default= DEGD]
- | | | | | @geoRefSystem [Optional]
- | | | | | | xGeoCoord 1-1
- | | | | | | yGeoCoord 1-1
- | | | | | | zGeoCoord 0-1
- | | | note 0-99
- | | | | @numberingOrg [Optional]
- | | | | @codeList [Optional]
- | | | | @noteLabel [Optional]

| **terms 0-1**

| | **payment 0-5**

- | | | @finDiscount [Optional]
- | | | @finSurcharge [Optional]

| | - choose -

- | | | payTerm 1-1

| | - or -

- | | | payTermText 1-1

| | - end choose -

- | | | payMode 0-1

| | **insPayment 0-5**

- | | | @part [Required]

| | - choose -

- | | | payTerm 1-1

| | - or -

- | | | payTermText 1-1

| | - end choose -

- | | | payMode 0-1

| | **trade 0-1**

| | - choose -

- | | | incoTermText 1-1

| | - or -

- | | | incoTerm 1-1

| | - end choose -

| | - choose -

| | | **tradeLocation 0-1**

- | | | | location 0-1

- | | | | | @LRI [Optional]

- | | | | legalName 0-1

- | | | | dept 0-1

- | | | | subDept 0-1

- | | | | person 0-1

- | | | | | @email [Optional]

- | | | | | @phone [Optional]

- | | | | | @fax [Optional]

- | | | | street 0-1

- | | | | city 0-1

- | | | | subCountry 0-1

- | | | | country 0-1

- | | | | postCode 0-1

- | | | | | **geoCoordinates 0-1**

- | | | | | | @um [Optional] [Default= DEGD]

- | | | | | | @geoRefSystem [Optional]

- | | | | | | | xGeoCoord 1-1

- | | | | | | | yGeoCoord 1-1

- | | | | | | | zGeoCoord 0-1

| | - or -

- | | | location 0-1

```

| | | @LRI [Optional]
| | - end choose -
| | transInfo 0-5
| | @transReason [Optional]
| | @progr [Optional]
| | | transMode 1-1
| | | carrier 0-1
| | - choose -
| | | deliveryLocation 0-1
| | | | location 0-1
| | | | | @LRI [Optional]
| | | | | legalName 0-1
| | | | | dept 0-1
| | | | | subDept 0-1
| | | | | person 0-1
| | | | | @email [Optional]
| | | | | @phone [Optional]
| | | | | @fax [Optional]
| | | | | street 0-1
| | | | | city 0-1
| | | | | subCountry 0-1
| | | | | country 0-1
| | | | | postCode 0-1
| | | | | geoCoordinates 0-1
| | | | | | @um [Optional] [Default= DEGD]
| | | | | | @geoRefSystem [Optional]
| | | | | | | xGeoCoord 1-1
| | | | | | | yGeoCoord 1-1
| | | | | | | zGeoCoord 0-1
| | - or -
| | | deliveryPlace 0-1
| | - end choose -
| | | grossWeight 0-1
| | | | @um [Required]
| | | | netWeight 0-1
| | | | | @um [Required]
| | | | transMeans 0-1
| | | | | @propulsionSystemCode [Optional]
| | | | transCondition 0-3
| | | | | transConditionText 0-1
| | - choose -
| | | despatchPlace 0-1
| | - or -
| | | despatchLocation 0-1
| | | | location 0-1
| | | | | @LRI [Optional]
| | | | | legalName 0-1
| | | | | dept 0-1
| | | | | subDept 0-1
| | | | | person 0-1
| | | | | @email [Optional]
| | | | | @phone [Optional]
| | | | | @fax [Optional]
| | | | | street 0-1
| | | | | city 0-1
| | | | | subCountry 0-1
| | | | | country 0-1
| | | | | postCode 0-1
| | | | | geoCoordinates 0-1
| | | | | | @um [Optional] [Default= DEGD]
| | | | | | @geoRefSystem [Optional]
| | | | | | | xGeoCoord 1-1
| | | | | | | yGeoCoord 1-1
| | | | | | | zGeoCoord 0-1
| | - end choose -
| | | despatchDate 0-1
| | | | @dateForm [Optional]
| | | delEffectiveDate 0-1

```

```

| | | @dateForm [Optional]
| | | routeLength 0-1
| | | @um [Required]
| | allowanceCharge 0-9
| | | @um [Optional]
| | | @VAT [Optional]
| | | @minQty [Optional]
| | | @currency [Optional]
| | | @maxQty [Optional]
| | | @isCharge [Optional]
| | | - choose -
| | | | AC_category 1-1
| | | | - or -
| | | | AC_categoryText 1-1
| | | | - end choose -
| | | | - choose -
| | | | AC_percent 1-1
| | | | - or -
| | | | AC_amount 1-1
| | | | @currency [Optional]
| | | - end choose -
| | | dtScheme 0-1
| | | | @taxType [Required]
| | | | | taxCategory 0-1
| | | | | taxRate 0-1
| | | | | legalRef 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | note 0-99
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @noteLabel [Optional]

```

```

| garComInfo 0-1
| | @endUse [Optional]
| | | season 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | brand 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | productLine 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | project 0-1
| | | operationalCode 0-19
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | @codeQualifier [Optional]
| | | deliveryDate 0-1
| | | | @dateForm [Optional]
| | | specDate 0-1
| | | | @dateForm [Optional]
| | | - choose -
| | | yarnPack 0-1
| | | | yarnReel 1-1
| | | | | @reelType [Required]
| | | | | @reelMat [Optional]

```



```

| | | | yarnReelD 0-1
| | | |   @um [Required]
| | | | yarnReelH 0-1
| | | |   @um [Required]
| | | | yarnConeAngle 0-1
| | | | yarnReelQty 0-2
| | | |   @um [Required]
| | | | label 0-1
| | | | labelWrit 0-1
| | | | yarnInWrap 0-1
| | | |   yarnReelWrap 1-1
| | | |   label 0-1
| | | |   labelWrit 0-1
| | | | - choose -
| | | | yarnOutWrapText 0-1
| | | | - or -
| | | | yarnOutWrap 0-1
| | | | - end choose -
| | | | - or -
| | | | piecePack 0-1
| | | | - choose -
| | | | piecePackText 1-1
| | | | - or -
| | | | pieceInnWrap1 1-1
| | | | pieceInnWrap2 0-1
| | | | pieceOutWrap 0-1
| | | | - end choose -
| | | | - or -
| | | | acsPack 0-1
| | | | - choose -
| | | | acsPackCode 1-1
| | | |   @numberingOrg [Optional]
| | | |   @codeList [Optional]
| | | |   @listName [Optional]
| | | |   @listVersion [Optional]
| | | | - or -
| | | | acsPackText 1-1
| | | | - end choose -
| | | | - or -
| | | | garPack 0-1
| | | | - choose -
| | | | garPackCode 1-1
| | | |   @numberingOrg [Optional]
| | | |   @codeList [Optional]
| | | |   @listName [Optional]
| | | |   @listVersion [Optional]
| | | | - or -
| | | | garPackText 1-1
| | | | - end choose -
| | | | - end choose -
| | | | note 0-99
| | | |   @numberingOrg [Optional]
| | | |   @codeList [Optional]
| | | |   @noteLabel [Optional]
| | | |
| | | | KCCObody 1-1
| | | | KCCOitem 1-unbounded
| | | |   @productLevel [Optional] [Default= END]
| | | |   lineN 1-1
| | | |   @VAT [Optional]
| | | |   lineID 0-1
| | | |   priority 0-1
| | | | apparelProd 1-1
| | | | - choose -
| | | | garmentPartCode 1-2
| | | |   @numberingOrg [Optional]
| | | |   gPart 1-1
| | | |   mod 1-1

```

```

| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | fabric 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | color 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | added 0-19
| | | | @numberingOrg [Optional]
| | | | @addType [Optional]
| | | | size 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | description 0-unbounded
| | | | @ln [Optional]

```

- or -

```

| | | | garmentCode 1-2
| | | | @numberingOrg [Optional]

```

- choose -

```

| | | | garmentCodeB 1-1
| | | | @numberingOrg [Optional]
| | | | mod 1-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | fabric 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | color 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | garmentVariant 0-9
| | | | variantType 1-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | variantCode 1-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | drop 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | size 0-1
| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | artGroup 0-1
| | | | @numberingOrg [Optional]

```

```

| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | added 0-9
| | | | | @numberingOrg [Optional]
| | | | | @addType [Optional]
| | | | | description 0-unbounded
| | | | | @ln [Optional]
| | | | | - or -
| | | | | garmentCodeA 1-1
| | | | | | art 1-1
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @listName [Optional]
| | | | | | @listVersion [Optional]
| | | | | | description 0-unbounded
| | | | | | @ln [Optional]
| | | | | - end choose -
| | | | | - end choose -
| | | | | lotN 0-1
| | | | | | @numberingOrg [Optional]
| | | | | dyeN 0-1
| | | | | | @numberingOrg [Optional]
| | | | | qty 1-2
| | | | | | @um [Required]
| | | | | csRange 0-99
| | | | | | @numberingOrg [Optional]
| | | | | | @sizeSystemNat [Optional]
| | | | | | @sizeSystemSeg [Optional]
| | | | | | @sizeSystemBase [Optional]
| | | | | | @sizeSystemID [Optional]
| | | | | | color 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | garmentVariant 0-9
| | | | | | | variantType 1-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]
| | | | | | | | @listName [Optional]
| | | | | | | | @listVersion [Optional]
| | | | | | | variantCode 1-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]
| | | | | | | | @listName [Optional]
| | | | | | | | @listVersion [Optional]
| | | | | | drop 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | sizeMatrix 1-1
| | | | | | | sizeRow 1-99
| | | | | | | | additionalComponentCode 0-9
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]
| | | | | | | | | @listVersion [Optional]
| | | | | | | | drop 0-1
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]
| | | | | | | | | @listVersion [Optional]
| | | | | | | | size 1-1
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]

```



```

| | | | | garmentVariant 0-9
| | | | | variantType 1-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | variantCode 1-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | drop 0-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | size 0-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | artGroup 0-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | added 0-9
| | | | |   @numberingOrg [Optional]
| | | | |   @addType [Optional]
| | | | | description 0-unbounded
| | | | |   @ln [Optional]
| | | | | - or -
| | | | | garmentCodeA 1-1
| | | | | art 1-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | description 0-unbounded
| | | | |   @ln [Optional]
| | | | | - end choose -
| | | | | refDoc 0-9
| | | | | @docType [Required]
| | | | | docID 1-2
| | | | |   @numberingOrg [Optional]
| | | | | docDate 0-1
| | | | |   @dateForm [Optional]
| | | | | season 0-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
| | | | | itemID 0-1
| | | | | attachment 0-1
| | | | | @uid [Optional]
| | | | |   fileName 0-1
| | | | |     @numberingOrg [Optional]
| | | | |   binaryObject 0-1
| | | | |     @format [Optional]
| | | | |     @mime [Optional]
| | | | |     @encoding [Optional]
| | | | |     @characterSet [Optional]
| | | | | externalReference 0-99
| | | | |   uri 1-1
| | | | |     @isURL [Optional] [Default= true]
| | | | |   mimeTypeCode 0-1
| | | | |   formatCode 0-1
| | | | |   encodingCode 0-1

```

```

| | | | | characterSetCode 0-1
| | | | | hashFootprint 0-1
| | | | | @schemeID [Optional]
| | | | | @hashMethod [Required]
| | | | | blockChainReference 0-9
| | | | | | uri 1-1
| | | | | | @isURL [Optional] [Default= true]
| | | | | | transactionReceipt 1-9
| | | | | fabricCompos 0-1
| | | | | | percCompos 1-9
| | | | | | @fibre [Required]
| | | | | | @materialSource [Optional]
| | | | | | @recyclingProcessMethod [Optional]
| | | | | | @percSourcesRenewable [Optional]
| | | | | | @validationMethod [Optional]
| | | | | | @recyclingProcessEfficiency [Optional]
| | | | | customsStat 0-1
| | | | | @schemeID [Optional] [Default= TARIC]
| | | | | grossWeight 0-1
| | | | | @um [Required]
| | | | | netWeight 0-1
| | | | | @um [Required]
| | | | | garSizeSet 0-1
| | | | | @numberingOrg [Optional]
| | | | | @sizeSystemNat [Optional]
| | | | | @sizeSystemSeg [Optional]
| | | | | @sizeSystemBase [Optional]
| | | | | @sizeSystemID [Optional]
| | | | | | garSizeTier 1-9
| | | | | | | garSizeCode 1-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | | sizeStart 1-1
| | | | | | | sizeEnd 0-1
| | | | | garMeaSet 0-99
| | | | | | garAttrib 1-1
| | | | | | garMea 1-9
| | | | | | | size 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | | specValue 1-1
| | | | | | | @um [Optional]
| | | | | | | @source [Optional]
| | | | | | | @method [Optional]
| | | | | | | @application [Optional]
| | | | | | | @CV [Optional]
| | | | | garConsumptionSet 0-99
| | | | | - choose -
| | | | | | acsCode 1-1
| | | | | | @numberingOrg [Optional]
| | | | | | | art 1-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | | pattern 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | | color 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]

```

				<ul style="list-style-type: none"> <li>  @listVersion [Optional]</li> <li>  added 0-9</li> <li>  @numberingOrg [Optional]</li> <li>  @addType [Optional]</li> <li>  description 0-unbounded</li> <li>  @In [Optional]</li> </ul>
			- or -	<p><b>texCode 1-1</b></p> <ul style="list-style-type: none"> <li>  @numberingOrg [Optional]</li> <li>  art 1-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  pattern 0-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  color 0-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  added 0-9</li> <li>  @numberingOrg [Optional]</li> <li>  @addType [Optional]</li> <li>  description 0-unbounded</li> <li>  @In [Optional]</li> </ul>
			- or -	<p><b>yarnCode 1-1</b></p> <ul style="list-style-type: none"> <li>  @numberingOrg [Optional] [Default= CL]</li> <li>  art 1-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  color 0-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  added 0-9</li> <li>  @numberingOrg [Optional]</li> <li>  @addType [Optional]</li> <li>  description 0-unbounded</li> <li>  @In [Optional]</li> </ul>
			- or -	<p><b>garmentPartCode 1-1</b></p> <ul style="list-style-type: none"> <li>  @numberingOrg [Optional]</li> <li>  gPart 1-1</li> <li>  mod 1-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  fabric 0-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  color 0-1</li> <li>  @numberingOrg [Optional]</li> <li>  @codeList [Optional]</li> <li>  @listName [Optional]</li> <li>  @listVersion [Optional]</li> <li>  added 0-19</li> <li>  @numberingOrg [Optional]</li> </ul>

```

| | | | | @addType [Optional]
| | | | | size 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | description 0-unbounded
| | | | | @In [Optional]
| | | | |
- or -
| | | | | garmentCode 1-1
| | | | | @numberingOrg [Optional]
- choose -
| | | | | garmentCodeB 1-1
| | | | | @numberingOrg [Optional]
| | | | | mod 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | fabric 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | color 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | garmentVariant 0-9
| | | | | variantType 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | variantCode 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | drop 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | size 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | artGroup 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | added 0-9
| | | | | @numberingOrg [Optional]
| | | | | @addType [Optional]
| | | | | description 0-unbounded
| | | | | @In [Optional]
| | | | |
- or -
| | | | | garmentCodeA 1-1
| | | | | art 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | description 0-unbounded

```



```

| | | | | @In [Optional]
| | | | | - end choose -
| | | | | - end choose -
| | | | | lotN 0-99
| | | | | @numberingOrg [Optional]
| | | | | dyeN 0-99
| | | | | @numberingOrg [Optional]
| | | | | garConsumption 1-9
| | | | | @numberingOrg [Optional]
| | | | | @consumptionType [Optional]
| | | | | | garSizeCode 0-1
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @listName [Optional]
| | | | | | @listVersion [Optional]
| | | | | | qty 1-1
| | | | | | @um [Required]
| | | | | | qtyVariance 0-1
| | | | | | @um [Optional]
| | | | | | @varReason [Optional]
| | | | | mnfrNote 0-99
| | | | | @subject [Optional]
| | | | | image 0-99
| | | | | @subject [Optional]
| | | | | progress 0-9
| | | | | | qty 1-2
| | | | | | @um [Required]
| | | | | | deliveryDate 0-1
| | | | | | @dateForm [Optional]
| | | | | | delGrantedDate 0-1
| | | | | | @dateForm [Optional]
| | | | | - choose -
| | | | | | mfrStatus 0-1
| | | | | - or -
| | | | | | mfrStatusText 0-1
| | | | | - end choose -
| | | | | itemsList 0-1
| | | | | | qualityLevel 0-1
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @listName [Optional]
| | | | | | @listVersion [Optional]
| | | | | | itemIdentification 1-unbounded
| | | | | | | serialN 1-9
| | | | | | | @numberingOrg [Optional]
| | | | | | | @idQualifier [Optional]
| | | | | | qualityLevel 0-1
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @listName [Optional]
| | | | | | @listVersion [Optional]
| | | | | | statusReason 0-1
| | | | | apparelComponent 0-9
| | | | | | gPart 0-1
| | | | | | yarnComponent 0-9
| | | | | | @CQQ [Optional]
| | | | | | | pcQty 0-1
| | | | | | | @um [Optional]
| | | | | | | yarnCode 1-1
| | | | | | | @numberingOrg [Optional] [Default= CL]
| | | | | | | | art 1-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]
| | | | | | | | @listName [Optional]
| | | | | | | | @listVersion [Optional]
| | | | | | | | color 0-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]

```

| @listName [Optional]  
 | @listVersion [Optional]  
 | added 0-9  
 | @numberingOrg [Optional]  
 | @addType [Optional]  
 | description 0-unbounded  
 | @ln [Optional]  
 | lotN 0-1  
 | @numberingOrg [Optional]  
 | dyeN 0-1  
 | @numberingOrg [Optional]  
 | qty 1-2  
 | @um [Required]  
 | **refDoc 0-9**  
 | @docType [Required]  
 | docID 1-2  
 | @numberingOrg [Optional]  
 | docDate 0-1  
 | @dateForm [Optional]  
 | season 0-1  
 | @numberingOrg [Optional]  
 | @codeList [Optional]  
 | @listName [Optional]  
 | @listVersion [Optional]  
 | itemID 0-1  
 | **attachment 0-1**  
 | @uid [Optional]  
 | fileName 0-1  
 | @numberingOrg [Optional]  
 | binaryObject 0-1  
 | @format [Optional]  
 | @mime [Optional]  
 | @encoding [Optional]  
 | @characterSet [Optional]  
 | **externalReference 0-99**  
 | uri 1-1  
 | @isURL [Optional] [Default= true]  
 | mimeTypeCode 0-1  
 | formatCode 0-1  
 | encodingCode 0-1  
 | characterSetCode 0-1  
 | hashFootprint 0-1  
 | @schemeID [Optional]  
 | @hashMethod [Required]  
 | **blockChainReference 0-9**  
 | uri 1-1  
 | @isURL [Optional] [Default= true]  
 | transactionReceipt 1-9  
 | location 0-1  
 | @LRI [Optional]  
 | warpLetter 0-1  
 | weftLetter 0-1  
 | note 0-99  
 | @numberingOrg [Optional]  
 | @codeList [Optional]  
 | @noteLabel [Optional]  
 | **fabricComponent 0-9**  
 | **texCode 1-1**  
 | @numberingOrg [Optional]  
 | art 1-1  
 | @numberingOrg [Optional]  
 | @codeList [Optional]  
 | @listName [Optional]  
 | @listVersion [Optional]  
 | pattern 0-1  
 | @numberingOrg [Optional]  
 | @codeList [Optional]  
 | @listName [Optional]

```

| | | | | @listVersion [Optional]
| | | | | color 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | added 0-9
| | | | | @numberingOrg [Optional]
| | | | | @addType [Optional]
| | | | | description 0-unbounded
| | | | | @ln [Optional]
| | | | | qty 1-3
| | | | | @um [Required]
| | | | | - choose -
| | | | | serialN 0-unbounded
| | | | | @numberingOrg [Optional]
| | | | | @idQualifier [Optional]
| | | | | - or -
| | | | | itemsList 0-unbounded
| | | | | qualityLevel 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | itemIdentification 1-unbounded
| | | | | serialN 1-9
| | | | | @numberingOrg [Optional]
| | | | | @idQualifier [Optional]
| | | | | - end choose -
| | | | | refDoc 0-9
| | | | | @docType [Required]
| | | | | docID 1-2
| | | | | @numberingOrg [Optional]
| | | | | docDate 0-1
| | | | | @dateForm [Optional]
| | | | | season 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | itemID 0-1
| | | | | attachment 0-1
| | | | | @uid [Optional]
| | | | | fileName 0-1
| | | | | @numberingOrg [Optional]
| | | | | binaryObject 0-1
| | | | | @format [Optional]
| | | | | @mime [Optional]
| | | | | @encoding [Optional]
| | | | | @characterSet [Optional]
| | | | | externalReference 0-99
| | | | | uri 1-1
| | | | | @isURL [Optional] [Default= true]
| | | | | mimeTypeCode 0-1
| | | | | formatCode 0-1
| | | | | encodingCode 0-1
| | | | | characterSetCode 0-1
| | | | | hashFootprint 0-1
| | | | | @schemeID [Optional]
| | | | | @hashMethod [Required]
| | | | | blockChainReference 0-9
| | | | | uri 1-1
| | | | | @isURL [Optional] [Default= true]
| | | | | transactionReceipt 1-9
| | | | | location 0-1
| | | | | @LRI [Optional]
| | | | | note 0-99
| | | | | @numberingOrg [Optional]

```

```

| @codeList [Optional]
| @noteLabel [Optional]
| garmentPartComponent 0-9
| garmentPartCode 1-1
| @numberingOrg [Optional]
|   gPart 1-1
|   mod 1-1
|   @numberingOrg [Optional]
|   @codeList [Optional]
|   @listName [Optional]
|   @listVersion [Optional]
|   fabric 0-1
|   @numberingOrg [Optional]
|   @codeList [Optional]
|   @listName [Optional]
|   @listVersion [Optional]
|   color 0-1
|   @numberingOrg [Optional]
|   @codeList [Optional]
|   @listName [Optional]
|   @listVersion [Optional]
|   added 0-19
|   @numberingOrg [Optional]
|   @addType [Optional]
|   size 0-1
|   @numberingOrg [Optional]
|   @codeList [Optional]
|   @listName [Optional]
|   @listVersion [Optional]
|   description 0-unbounded
|   @ln [Optional]
| lotN 0-1
| @numberingOrg [Optional]
| dyeN 0-1
| @numberingOrg [Optional]
| qty 1-2
| @um [Required]
| refDoc 0-9
| @docType [Required]
|   docID 1-2
|   @numberingOrg [Optional]
|   docDate 0-1
|   @dateForm [Optional]
|   season 0-1
|   @numberingOrg [Optional]
|   @codeList [Optional]
|   @listName [Optional]
|   @listVersion [Optional]
|   itemID 0-1
| attachment 0-1
| @uid [Optional]
|   fileName 0-1
|   @numberingOrg [Optional]
|   binaryObject 0-1
|   @format [Optional]
|   @mime [Optional]
|   @encoding [Optional]
|   @characterSet [Optional]
| externalReference 0-99
|   uri 1-1
|   @isURL [Optional] [Default= true]
|   mimeTypeCode 0-1
|   formatCode 0-1
|   encodingCode 0-1
|   characterSetCode 0-1
|   hashFootprint 0-1
|   @schemeID [Optional]
|   @hashMethod [Required]

```

**blockChainReference 0-9**

| uri 1-1  
| @isURL [Optional] [Default= true]  
| transactionReceipt 1-9  
location 0-1  
| @LRI [Optional]  
note 0-99  
| @numberingOrg [Optional]  
| @codeList [Optional]  
| @noteLabel [Optional]

**acsComponent 0-99**

**acsCode 1-1**

| @numberingOrg [Optional]  
| art 1-1  
| @numberingOrg [Optional]  
| @codeList [Optional]  
| @listName [Optional]  
| @listVersion [Optional]  
pattern 0-1  
| @numberingOrg [Optional]  
| @codeList [Optional]  
| @listName [Optional]  
| @listVersion [Optional]  
color 0-1  
| @numberingOrg [Optional]  
| @codeList [Optional]  
| @listName [Optional]  
| @listVersion [Optional]  
added 0-9  
| @numberingOrg [Optional]  
| @addType [Optional]  
description 0-unbounded  
| @In [Optional]

lotN 0-1  
| @numberingOrg [Optional]

dyeN 0-1  
| @numberingOrg [Optional]

qty 1-2  
| @um [Required]

**refDoc 0-9**

| @docType [Required]  
| docID 1-2  
| @numberingOrg [Optional]  
| docDate 0-1  
| @dateForm [Optional]  
| season 0-1  
| @numberingOrg [Optional]  
| @codeList [Optional]  
| @listName [Optional]  
| @listVersion [Optional]  
itemID 0-1

**attachment 0-1**

| @uid [Optional]  
| fileName 0-1  
| @numberingOrg [Optional]  
| binaryObject 0-1  
| @format [Optional]  
| @mime [Optional]  
| @encoding [Optional]  
| @characterSet [Optional]

**externalReference 0-99**

| uri 1-1  
| @isURL [Optional] [Default= true]  
| mimeTypeCode 0-1  
| formatCode 0-1  
| encodingCode 0-1  
| characterSetCode 0-1  
hashFootprint 0-1

```

| | | | | | @schemeID [Optional]
| | | | | | @hashMethod [Required]
| | | | | | blockChainReference 0-9
| | | | | | | uri 1-1
| | | | | | | @isURL [Optional] [Default= true]
| | | | | | | transactionReceipt 1-9
| | | | | | location 0-1
| | | | | | | @LRI [Optional]
| | | | | | | note 0-99
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @noteLabel [Optional]
| | | | | | appMnfrOperation 0-9
| | | | | | - choose -
| | | | | | | | jobName 1-1
| | | | | | | - or -
| | | | | | | | appJob 1-1
| | | | | | | - end choose -
| | | | | | | appJobTech 0-1
| | | | | | | | refDoc 0-9
| | | | | | | | @docType [Required]
| | | | | | | | | docID 1-2
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | docDate 0-1
| | | | | | | | | @dateForm [Optional]
| | | | | | | | | season 0-1
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]
| | | | | | | | | @listVersion [Optional]
| | | | | | | | | itemID 0-1
| | | | | | | | | attachment 0-1
| | | | | | | | | @uid [Optional]
| | | | | | | | | | fileName 0-1
| | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | binaryObject 0-1
| | | | | | | | | | @format [Optional]
| | | | | | | | | | @mime [Optional]
| | | | | | | | | | @encoding [Optional]
| | | | | | | | | | @characterSet [Optional]
| | | | | | | | | | externalReference 0-99
| | | | | | | | | | | uri 1-1
| | | | | | | | | | | @isURL [Optional] [Default= true]
| | | | | | | | | | | mimeTypeCode 0-1
| | | | | | | | | | | formatCode 0-1
| | | | | | | | | | | encodingCode 0-1
| | | | | | | | | | | characterSetCode 0-1
| | | | | | | | | | | hashFootprint 0-1
| | | | | | | | | | | @schemeID [Optional]
| | | | | | | | | | | @hashMethod [Required]
| | | | | | | | | | | blockChainReference 0-9
| | | | | | | | | | | | uri 1-1
| | | | | | | | | | | | @isURL [Optional] [Default= true]
| | | | | | | | | | | | transactionReceipt 1-9
| | | | | | | | | | | appMachine 0-1
| | | | | | | | | | | note 0-99
| | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | @codeList [Optional]
| | | | | | | | | | | @noteLabel [Optional]
| | | | | | | | | | | phase 0-99
| | | | | | | | | | | @progr [Required]
| | | | | | | | | | | | phaseCode 1-1
| | | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | | @codeList [Optional]
| | | | | | | | | | | | @listName [Optional]
| | | | | | | | | | | | @listVersion [Optional]
| | | | | | | | | | | | criticalityIndicator 0-1
| | | | | | | | | | | | finalIndicator 0-1

```

```

| qty 0-2
| @um [Required]
| lotDetails 0-99
|   | lotN 1-1
|   |   | @numberingOrg [Optional]
|   |   | qty 0-1
|   |   | @um [Required]
|   |   | csRange 0-99
|   |   |   | @numberingOrg [Optional]
|   |   |   | @sizeSystemNat [Optional]
|   |   |   | @sizeSystemSeg [Optional]
|   |   |   | @sizeSystemBase [Optional]
|   |   |   | @sizeSystemID [Optional]
|   |   |   | color 0-1
|   |   |   |   | @numberingOrg [Optional]
|   |   |   |   | @codeList [Optional]
|   |   |   |   | @listName [Optional]
|   |   |   |   | @listVersion [Optional]
|   |   |   | garmentVariant 0-9
|   |   |   |   | variantType 1-1
|   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   | @codeList [Optional]
|   |   |   |   |   | @listName [Optional]
|   |   |   |   |   | @listVersion [Optional]
|   |   |   |   | variantCode 1-1
|   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   | @codeList [Optional]
|   |   |   |   |   | @listName [Optional]
|   |   |   |   |   | @listVersion [Optional]
|   |   |   | drop 0-1
|   |   |   |   | @numberingOrg [Optional]
|   |   |   |   | @codeList [Optional]
|   |   |   |   | @listName [Optional]
|   |   |   |   | @listVersion [Optional]
|   |   |   | sizeMatrix 1-1
|   |   |   |   | sizeRow 1-99
|   |   |   |   |   | additionalComponentCode 0-9
|   |   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   |   | @codeList [Optional]
|   |   |   |   |   |   | @listName [Optional]
|   |   |   |   |   |   | @listVersion [Optional]
|   |   |   |   |   | drop 0-1
|   |   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   |   | @codeList [Optional]
|   |   |   |   |   |   | @listName [Optional]
|   |   |   |   |   |   | @listVersion [Optional]
|   |   |   |   |   | size 1-1
|   |   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   |   | @codeList [Optional]
|   |   |   |   |   |   | @listName [Optional]
|   |   |   |   |   |   | @listVersion [Optional]
|   |   |   |   |   | qty 0-1
|   |   |   |   |   | @um [Required]
|   |   |   |   | itemsList 0-1
|   |   |   |   |   | qualityLevel 0-1
|   |   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   |   | @codeList [Optional]
|   |   |   |   |   |   | @listName [Optional]
|   |   |   |   |   |   | @listVersion [Optional]
|   |   |   |   | itemIdentification 1-unbounded
|   |   |   |   |   | serialN 1-9
|   |   |   |   |   |   | @numberingOrg [Optional]
|   |   |   |   |   |   | @idQualifier [Optional]
| refDoc 0-99
| @docType [Required]
|   | docID 1-2
|   |   | @numberingOrg [Optional]
|   | docDate 0-1

```

| @dateForm [Optional]  
 | season 0-1  
 | @numberingOrg [Optional]  
 | @codeList [Optional]  
 | @listName [Optional]  
 | @listVersion [Optional]  
 | itemID 0-1  
 | **attachment 0-1**  
 | @uid [Optional]  
 | | fileName 0-1  
 | | @numberingOrg [Optional]  
 | | binaryObject 0-1  
 | | @format [Optional]  
 | | @mime [Optional]  
 | | @encoding [Optional]  
 | | @characterSet [Optional]  
 | | **externalReference 0-99**  
 | | | uri 1-1  
 | | | @isURL [Optional] [Default= true]  
 | | | mimeTypeCode 0-1  
 | | | formatCode 0-1  
 | | | encodingCode 0-1  
 | | | characterSetCode 0-1  
 | | | hashFootprint 0-1  
 | | | @schemeID [Optional]  
 | | | @hashMethod [Required]  
 | | **blockChainReference 0-9**  
 | | | uri 1-1  
 | | | @isURL [Optional] [Default= true]  
 | | | transactionReceipt 1-9  
 | notBeforeDate 0-1  
 | @dateForm [Optional]  
 | deliveryDate 0-1  
 | @dateForm [Optional]  
 | delGrantedDate 0-1  
 | @dateForm [Optional]  
 | price 0-1  
 | @um [Optional]  
 | @priceQualifier [Optional] [Default= NET]  
 | @currency [Optional]  
 | **thirdParty 0-9**  
 | @VAT [Optional]  
 | @role [Required]  
 | @sender [Optional]  
 | | id 1-1  
 | | @numberingOrg [Optional]  
 | | legalName 0-1  
 | | dept 0-1  
 | | subDept 0-1  
 | | person 0-1  
 | | @email [Optional]  
 | | @phone [Optional]  
 | | @fax [Optional]  
 | | street 0-1  
 | | city 0-1  
 | | subCountry 0-1  
 | | country 0-1  
 | | postCode 0-1  
 | | **geoCoordinates 0-1**  
 | | @um [Optional] [Default= DEGD]  
 | | @geoRefSystem [Optional]  
 | | | xGeoCoord 1-1  
 | | | yGeoCoord 1-1  
 | | | zGeoCoord 0-1  
 | **garConsumptionSet 0-99**  
 | - choose -  
 | | **acsCode 1-1**  
 | | @numberingOrg [Optional]



				art 1-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] pattern 0-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] color 0-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] added 0-9 @numberingOrg [Optional] @addType [Optional] description 0-unbounded @ln [Optional]
			- or -	<b>texCode 1-1</b> @numberingOrg [Optional] art 1-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] pattern 0-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] color 0-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] added 0-9 @numberingOrg [Optional] @addType [Optional] description 0-unbounded @ln [Optional]
			- or -	<b>yarnCode 1-1</b> @numberingOrg [Optional] [Default= CL] art 1-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] color 0-1 @numberingOrg [Optional] @codeList [Optional] @listName [Optional] @listVersion [Optional] added 0-9 @numberingOrg [Optional] @addType [Optional] description 0-unbounded @ln [Optional]
			- or -	<b>garmentPartCode 1-1</b> @numberingOrg [Optional] gPart 1-1 mod 1-1 @numberingOrg [Optional] @codeList [Optional]

```

| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | fabric 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | color 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | added 0-19
| | | | | @numberingOrg [Optional]
| | | | | @addType [Optional]
| | | | | size 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | description 0-unbounded
| | | | | @In [Optional]
- or -
| | | | | garmentCode 1-1
| | | | | @numberingOrg [Optional]
- choose -
| | | | | garmentCodeB 1-1
| | | | | @numberingOrg [Optional]
| | | | | mod 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | fabric 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | color 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | garmentVariant 0-9
| | | | | variantType 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | variantCode 1-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | drop 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | size 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]
| | | | | @listVersion [Optional]
| | | | | artGroup 0-1
| | | | | @numberingOrg [Optional]
| | | | | @codeList [Optional]
| | | | | @listName [Optional]

```

```

| | | | | | | | @listVersion [Optional]
| | | | | | | | added 0-9
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @addType [Optional]
| | | | | | | | description 0-unbounded
| | | | | | | | @ln [Optional]
| | | | | | | | - or -
| | | | | | | | garmentCodeA 1-1
| | | | | | | | | art 1-1
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]
| | | | | | | | | @listVersion [Optional]
| | | | | | | | | description 0-unbounded
| | | | | | | | | @ln [Optional]
| | | | | | | | - end choose -
| | | | | | | | - end choose -
| | | | | | | | lotN 0-99
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | dyeN 0-99
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | garConsumption 1-9
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @consumptionType [Optional]
| | | | | | | | | | garSizeCode 0-1
| | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | @codeList [Optional]
| | | | | | | | | | @listName [Optional]
| | | | | | | | | | @listVersion [Optional]
| | | | | | | | | qty 1-1
| | | | | | | | | | @um [Required]
| | | | | | | | | qtyVariance 0-1
| | | | | | | | | | @um [Optional]
| | | | | | | | | | @varReason [Optional]
| | | | | | | | packages 0-99
| | | | | | | | | @packageLevel [Optional]
| | | | | | | | - choose -
| | | | | | | | | packageText 1-1
| | | | | | | | - or -
| | | | | | | | | package 1-1
| | | | | | | | - end choose -
| | | | | | | | | packageModelCode 0-1
| | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | description 0-unbounded
| | | | | | | | | | @ln [Optional]
| | | | | | | | | packageDim 0-1
| | | | | | | | | | length 1-1
| | | | | | | | | | | @um [Required]
| | | | | | | | | | width 0-1
| | | | | | | | | | | @um [Required]
| | | | | | | | | | height 0-1
| | | | | | | | | | | @um [Required]
| | | | | | | | | handlingChar 0-1
| | | | | | | | - choose -
| | | | | | | | | yarnPack 0-1
| | | | | | | | | | yarnReel 1-1
| | | | | | | | | | | @reelType [Required]
| | | | | | | | | | | @reelMat [Optional]
| | | | | | | | | | | | yarnReelD 0-1
| | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | yarnReelH 0-1
| | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | yarnConeAngle 0-1
| | | | | | | | | | | | yarnReelQty 0-2
| | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | label 0-1
| | | | | | | | | | | | labelWrit 0-1
| | | | | | | | | | yarnlnWrap 0-1

```

```

| | | | | | | | | | yarnReelWrap 1-1
| | | | | | | | | | label 0-1
| | | | | | | | | | labelWrit 0-1
| | | | | | | | | | - choose -
| | | | | | | | | | | yarnOutWrapText 0-1
| | | | | | | | | | - or -
| | | | | | | | | | | yarnOutWrap 0-1
| | | | | | | | | | - end choose -
| | | | | | | | | | - or -
| | | | | | | | | | | piecePack 0-1
| | | | | | | | | | | - choose -
| | | | | | | | | | | | piecePackText 1-1
| | | | | | | | | | | - or -
| | | | | | | | | | | | pieceInnWrap1 1-1
| | | | | | | | | | | | pieceInnWrap2 0-1
| | | | | | | | | | | | pieceOutWrap 0-1
| | | | | | | | | | | - end choose -
| | | | | | | | | | - or -
| | | | | | | | | | | acsPack 0-1
| | | | | | | | | | | - choose -
| | | | | | | | | | | | acsPackCode 1-1
| | | | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | | | @codeList [Optional]
| | | | | | | | | | | | | @listName [Optional]
| | | | | | | | | | | | | @listVersion [Optional]
| | | | | | | | | | | - or -
| | | | | | | | | | | | acsPackText 1-1
| | | | | | | | | | | - end choose -
| | | | | | | | | | - or -
| | | | | | | | | | | garPack 0-1
| | | | | | | | | | | - choose -
| | | | | | | | | | | | garPackCode 1-1
| | | | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | | | @codeList [Optional]
| | | | | | | | | | | | | @listName [Optional]
| | | | | | | | | | | | | @listVersion [Optional]
| | | | | | | | | | | - or -
| | | | | | | | | | | | garPackText 1-1
| | | | | | | | | | | - end choose -
| | | | | | | | | | - end choose -
| | | | | | | | | | | sortableIndicator 0-1
| | | | | | | | | | | | stackabilityLevel 0-1
| | | | | | | | | | | | handlingType 0-1
| | | | | | | | | | | | | @ln [Optional]
| | | | | | | | | | | | | volume 0-1
| | | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | | | netWeight 0-1
| | | | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | | | | grossWeight 0-1
| | | | | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | | | | | note 0-99
| | | | | | | | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | | | | | | | @codeList [Optional]
| | | | | | | | | | | | | | | | | @noteLabel [Optional]
| | | | | | | | | | | | itemsPerPackage 0-1
| | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | | minItemsPerPackage 0-1
| | | | | | | | | | | | | | @um [Required]
| | | | | | | | | | | | | | fillingCriterion 0-9
| | | | | | | | | | | | | | | @progr [Optional]
| | | | | | | | | | | | | | | packageQty 0-1
| | | | | | | | | | | | | | | | packageN 0-unbounded
| | | | | | | | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | | | | | | | @packageContainerN [Optional]
| | | | | | | | | | | | | | EPCList 0-1
| | | | | | | | | | | | | | | EPC 1-unbounded
| | | | | | | | | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | | | | | | | | | @TID [Optional]

```

| | | | note 0-99  
| | | | @numberingOrg [Optional]  
| | | | @codeList [Optional]  
| | | | @noteLabel [Optional]

| | | | **garComInfo 0-1**

| | | | @endUse [Optional]  
| | | | season 0-1  
| | | | @numberingOrg [Optional]  
| | | | @codeList [Optional]  
| | | | @listName [Optional]  
| | | | @listVersion [Optional]  
| | | | brand 0-1  
| | | | @numberingOrg [Optional]  
| | | | @codeList [Optional]  
| | | | @listName [Optional]  
| | | | @listVersion [Optional]  
| | | | productLine 0-1  
| | | | @numberingOrg [Optional]  
| | | | @codeList [Optional]  
| | | | @listName [Optional]  
| | | | @listVersion [Optional]  
| | | | project 0-1  
| | | | operationalCode 0-19  
| | | | @numberingOrg [Optional]  
| | | | @codeList [Optional]  
| | | | @listName [Optional]  
| | | | @listVersion [Optional]  
| | | | @codeQualifier [Optional]  
| | | | deliveryDate 0-1  
| | | | @dateForm [Optional]  
| | | | specDate 0-1  
| | | | @dateForm [Optional]

- choose -

| | | | **yarnPack 0-1**

| | | | | **yarnReel 1-1**

| | | | | @reelType [Required]  
| | | | | @reelMat [Optional]  
| | | | | yarnReelD 0-1  
| | | | | @um [Required]  
| | | | | yarnReelH 0-1  
| | | | | @um [Required]  
| | | | | yarnConeAngle 0-1  
| | | | | yarnReelQty 0-2  
| | | | | @um [Required]  
| | | | | label 0-1  
| | | | | labelWrit 0-1

| | | | | **yarnInWrap 0-1**

| | | | | yarnReelWrap 1-1  
| | | | | label 0-1  
| | | | | labelWrit 0-1

- choose -

| | | | | yarnOutWrapText 0-1

- or -

| | | | | yarnOutWrap 0-1

- end choose -

- or -

| | | | **piecePack 0-1**

- choose -

| | | | | piecePackText 1-1

- or -

| | | | | pieceInnWrap1 1-1

| | | | | pieceInnWrap2 0-1

| | | | | pieceOutWrap 0-1

- end choose -

- or -

| | | | **acsPack 0-1**

- choose -

| | | | | acsPackCode 1-1

```

| | | | @numberingOrg [Optional]
| | | | @codeList [Optional]
| | | | @listName [Optional]
| | | | @listVersion [Optional]
| | | | - or -
| | | | | acsPackText 1-1
| | | | | - end choose -
| | | | - or -
| | | | | garPack 0-1
| | | | | - choose -
| | | | | | garPackCode 1-1
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @listName [Optional]
| | | | | | @listVersion [Optional]
| | | | | - or -
| | | | | | garPackText 1-1
| | | | | | - end choose -
| | | | - end choose -
| | | | | note 0-99
| | | | | | @numberingOrg [Optional]
| | | | | | @codeList [Optional]
| | | | | | @noteLabel [Optional]
| | | | endUseGroup 0-99
| | | | | endUseGroupIid 1-1
| | | | | qty 0-1
| | | | | | @um [Required]
| | | | | csRange 0-1
| | | | | | @numberingOrg [Optional]
| | | | | | @sizeSystemNat [Optional]
| | | | | | @sizeSystemSeg [Optional]
| | | | | | @sizeSystemBase [Optional]
| | | | | | @sizeSystemID [Optional]
| | | | | | color 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | garmentVariant 0-9
| | | | | | | variantType 1-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]
| | | | | | | | @listName [Optional]
| | | | | | | | @listVersion [Optional]
| | | | | | | variantCode 1-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]
| | | | | | | | @listName [Optional]
| | | | | | | | @listVersion [Optional]
| | | | | | drop 0-1
| | | | | | | @numberingOrg [Optional]
| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | sizeMatrix 1-1
| | | | | | | sizeRow 1-99
| | | | | | | | additionalComponentCode 0-9
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]
| | | | | | | | | @listVersion [Optional]
| | | | | | | | drop 0-1
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @codeList [Optional]
| | | | | | | | | @listName [Optional]
| | | | | | | | | @listVersion [Optional]
| | | | | | | | size 1-1
| | | | | | | | | @numberingOrg [Optional]

```

```

| | | | | | | @codeList [Optional]
| | | | | | | @listName [Optional]
| | | | | | | @listVersion [Optional]
| | | | | | | qty 0-1
| | | | | | | @um [Required]
| | | | | | | itemsList 0-1
| | | | | | | | qualityLevel 0-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | @codeList [Optional]
| | | | | | | | @listName [Optional]
| | | | | | | | @listVersion [Optional]
| | | | | | | | itemIdentification 1-unbounded
| | | | | | | | | serialN 1-9
| | | | | | | | | @numberingOrg [Optional]
| | | | | | | | | @idQualifier [Optional]
| | | | | | | packages 0-99
| | | | | | | @packageLevel [Optional]
| | | | | | | - choose -
| | | | | | | | packageText 1-1
| | | | | | | - or -
| | | | | | | | package 1-1
| | | | | | | - end choose -
| | | | | | | | packageModelCode 0-1
| | | | | | | | @numberingOrg [Optional]
| | | | | | | | description 0-unbounded
| | | | | | | | @ln [Optional]
| | | | | | | | packageDim 0-1
| | | | | | | | | length 1-1
| | | | | | | | | @um [Required]
| | | | | | | | | width 0-1
| | | | | | | | | @um [Required]
| | | | | | | | | height 0-1
| | | | | | | | | @um [Required]
| | | | | | | | handlingChar 0-1
| | | | | | | - choose -
| | | | | | | | yarnPack 0-1
| | | | | | | | | yarnReel 1-1
| | | | | | | | | | @reelType [Required]
| | | | | | | | | | @reelMat [Optional]
| | | | | | | | | | yarnReelID 0-1
| | | | | | | | | | | @um [Required]
| | | | | | | | | | yarnReelH 0-1
| | | | | | | | | | | @um [Required]
| | | | | | | | | | yarnConeAngle 0-1
| | | | | | | | | | yarnReelQty 0-2
| | | | | | | | | | | @um [Required]
| | | | | | | | | | label 0-1
| | | | | | | | | | labelWrit 0-1
| | | | | | | | | | yarnInWrap 0-1
| | | | | | | | | | | yarnReelWrap 1-1
| | | | | | | | | | | label 0-1
| | | | | | | | | | | labelWrit 0-1
| | | | | | | - choose -
| | | | | | | | yarnOutWrapText 0-1
| | | | | | | - or -
| | | | | | | | yarnOutWrap 0-1
| | | | | | | - end choose -
| | | | | | | - or -
| | | | | | | | piecePack 0-1
| | | | | | | - choose -
| | | | | | | | piecePackText 1-1
| | | | | | | - or -
| | | | | | | | pieceInnWrap1 1-1
| | | | | | | | pieceInnWrap2 0-1
| | | | | | | | pieceOutWrap 0-1
| | | | | | | - end choose -
| | | | | | | - or -
| | | | | | | | acsPack 0-1

```

```

- choose -
| | | | | acsPackCode 1-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
- or -
| | | | | acsPackText 1-1
- end choose -
- or -
| | | | | garPack 0-1
- choose -
| | | | |   garPackCode 1-1
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @listName [Optional]
| | | | |   @listVersion [Optional]
- or -
| | | | |   garPackText 1-1
- end choose -
- end choose -
| | | | |   sortableIndicator 0-1
| | | | |   stackabilityLevel 0-1
| | | | |   handlingType 0-1
| | | | |   @ln [Optional]
| | | | |   volume 0-1
| | | | |   @um [Required]
| | | | |   netWeight 0-1
| | | | |   @um [Required]
| | | | |   grossWeight 0-1
| | | | |   @um [Required]
| | | | |   note 0-99
| | | | |   @numberingOrg [Optional]
| | | | |   @codeList [Optional]
| | | | |   @noteLabel [Optional]
| | | | |   itemsPerPackage 0-1
| | | | |   @um [Required]
| | | | |   minItemsPerPackage 0-1
| | | | |   @um [Required]
| | | | |   fillingCriterion 0-9
| | | | |   @progr [Optional]
| | | | |   packageQty 0-1
| | | | |   packageN 0-unbounded
| | | | |   @numberingOrg [Optional]
| | | | |   @packageContainerN [Optional]
| | | | |   EPCList 0-1
| | | | |   | EPC 1-unbounded
| | | | |   | @numberingOrg [Optional]
| | | | |   | @TID [Optional]
| dtScheme 0-1
| @taxType [Required]
| | taxCategory 0-1
| | taxRate 0-1
| | legalRef 0-1
| | @numberingOrg [Optional]
| | @codeList [Optional]
| | @listName [Optional]
| | @listVersion [Optional]
| | note 0-99
| | @numberingOrg [Optional]
| | @codeList [Optional]
| | @noteLabel [Optional]
| note 0-99
| @numberingOrg [Optional]
| @codeList [Optional]
| @noteLabel [Optional]

```



## 2.2 Detailed description of document elements

Following tables show all elements (complex and simple) used in this document. Description includes: 1) element's information: xml tag, name, brief description, data type and syntax constraints; 2) information about use of the element in a particular position in the document: xpath and possible associated notes.

### 2.2.1 Complex elements (Aggregate Business Information Entities)

Complex elements are those elements whose content is composed of other elements (childs).Complex elements are alphabetically ordered.

<b>acsCode</b>	full codification identifying an accessory product usually coupled with garment or other fashion product (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode) 1-1
<b>acsComponent</b>	identification details of a accessory used in a sub-contracted manufacturing operation (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent) 0-99
<b>acsPack</b>	type of wrapping or packing of the accessory (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/acsPack) 0-1 (XPath KnitClothOrder/garComInfo/acsPack) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/acsPack) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/acsPack) 0-1
<b>allowanceCharge</b>	Allowances and Charges related to an Order or a contract (XPath KnitClothOrder/terms/allowanceCharge) 0-9
<b>apparelComponent</b>	identification details of a component used in the sub-contracted production of an apparel article or of one of its part (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent) 0-9
<b>apparelProd</b>	manufacturing specifications for a garment article to be obtained from an operation of sub-contracted production (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd) 1-1
<b>appMnfrOperation</b>	details of a manufacturing operation used for garment production (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation) 0-9
<b>attachment</b>	an attached document. An attachment can refer to an external document or be included with the document being exchanged (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCOheader/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment) 0-1
<b>blockChainReference</b>	blockchain reference - base type: string, max length: 80, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/blockChainReference) 0-9 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/blockChainReference) 0-9

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/blockChainReference) 0-9</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/blockChainReference) 0-9</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/blockChainReference) 0-9</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/attachment/blockChainReference) 0-9</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/blockChainReference) 0-9</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/blockChainReference) 0-9</p>
<b>buyer</b>	<p>details of the Buyer (party that buys the good or service that is object of the current collaborative process)</p> <p>- base type: Nad,</p> <p>(XPath KnitClothOrder/KCCOheader/buyer) 1-1</p>
<b>csRange</b>	<p>range of color-size for a fashion article</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange) 0-99</p>
<b>deliveryLocation</b>	<p>data relating to a place of delivery(indicate at least element location or address, city and country)</p> <p>- base type: Nad,</p> <p>(XPath KnitClothOrder/terms/transInfo/deliveryLocation) 0-1</p> <p>- note: <i>use to represent addresses in a structured way or with geographical coordinates</i></p>
<b>despatchLocation</b>	<p>data relating to a place of despatch (indicate at least element location or address, city and country)</p> <p>- base type: Nad,</p> <p>(XPath KnitClothOrder/terms/transInfo/despatchLocation) 0-1</p> <p>- note: <i>use to represent addresses in a structured way</i></p>
<b>dtScheme</b>	<p>set of data usable to declare the duty or tax applied</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme) 0-1</p> <p>(XPath KnitClothOrder/terms/allowanceCharge/dtScheme) 0-1</p>
<b>endUseGroup</b>	<p>references that connect the instances of a product to a group of articles (such as a group of items used in a shop window) of which it will be part of.</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup) 0-99</p>
<b>EPCList</b>	<p>list of identifiers used for tracing a physical item with RFID technology</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/EPCList) 0-1</p> <p>- note: <i>this element is DEPRECATED, please use the specific elements</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/EPCList) 0-1</p> <p>- note: <i>this element is DEPRECATED, please use the specific elements</i></p>
<b>externalReference</b>	<p>details about an external object, such as a document stored at a remote location</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/externalReference) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/externalReference) 0-99</p>
<b>fabricComponent</b>	<p>identification details of a fabric used in a sub-contracted manufacturing operation</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent) 0-9</p>
<b>fabricCompos</b>	<p>percent of composition of the fabric according to the Directive 97/37/CE</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos) 0-1</p>
<b>garComInfo</b>	<p>miscellaneous commercial information.</p>

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo) 0-1  - note: it should be used in this position instead of at document level only if the information apply only to the current line.  (XPath KnitClothOrder/garComInfo) 0-1</p>
<b>garConsumption</b>	<p>consumption of the component for the given size range  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption) 1-9  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption) 1-9</p>
<b>garConsumptionSet</b>	<p>components and average prescribed or effective consumptions for a garment  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet) 0-99  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet) 0-99</p>
<b>garMea</b>	<p>attribute's measure for the given size  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea) 1-9</p>
<b>garMeaSet</b>	<p>physical measures of the set of sizes of a garment  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet) 0-99</p>
<b>garmentCode</b>	<p>codification of the garment product  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode) 1-2  - note: this element can have two instances only if the numbering organisations are different  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode) 1-2</p>
<b>garmentCodeA</b>	<p>codification of the garment product- type A  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeA) 1-1  - note: here the barcode EAN-13 or EAN-8 should be specified  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeA) 1-1  - note: here the barcode EAN-13 or EAN-8 should be specified  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeA) 1-1  - note: here the barcode EAN-13 or EAN-8 should be specified  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeA) 1-1  - note: here the barcode EAN-13 or EAN-8 should be specified</p>
<b>garmentCodeB</b>	<p>codification of the garment product - type B  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB) 1-1</p>
<b>garmentPartCode</b>	<p>codification of the component or part of a fashion article  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode) 1-2  - note: this element can have two instances only if the numbering organisations are different</p>

<b>garmentPartComponent</b>	<p>identification details of a FASHION product part used in a sub-contracted manufacturing operation  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent) 0-9  - note: <i>used only for components that are semifinished products with their own code</i></p>
<b>garmentVariant</b>	<p>garment product variant  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant) 0-9  - note: <i>used only if not already specified in the article code</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/garmentVariant) 0-9  - note: <i>used only if not already specified in the article code</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant) 0-9  - note: <i>used only if not already specified in the article code</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant) 0-9</p>
<b>garPack</b>	<p>the packaging mode of the item or a part of it.  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack) 0-1  (XPath KnitClothOrder/garComInfo/garPack) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/garPack) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/garPack) 0-1</p>
<b>garSizeSet</b>	<p>size table for a garment  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet) 0-1</p>
<b>garSizeTier</b>	<p>definition of the range of sizes associated with a given code  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/garSizeTier) 1-9</p>
<b>garTecSheet</b>	<p>garment technical sheet  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet) 0-1</p>
<b>geoCoordinates</b>	<p>geographical coordinates  (XPath KnitClothOrder/KCCOheader/thirdParty/geoCoordinates) 0-1  (XPath KnitClothOrder/KCCOheader/subContractor/geoCoordinates) 0-1  (XPath KnitClothOrder/terms/transInfo/despachLocation/geoCoordinates) 0-1  (XPath KnitClothOrder/terms/trade/tradeLocation/geoCoordinates) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/geoCoordinates) 0-1  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/geoCoordinates) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/geoCoordinates) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/geoCoordinates) 0-1</p>
<b>handlingChar</b>	<p>features of an item (item or package) useful for its transport and warehouse management.  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar) 0-1  - note: <i>in this case the characteristics are related to the package.</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar) 0-1  - note: <i>in this case the characteristics are related to the package.</i></p>
<b>insPayment</b>	<p>payment details for payment by installments  (XPath KnitClothOrder/terms/insPayment) 0-5  - note: <i>excluded the case of offers, this set of data is alternative to payment set and must be iterated for each payment installment</i></p>
<b>itemIdentification</b>	<p>serial identification of a product unit  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification) 1-unbounded  - note: <i>identification of the single product unit contained in the list</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification) 1-unbounded  - note: <i>identification of the single product unit contained in the list</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/</p>

	<p>csRange/sizeMatrix/sizeRow/itemsList/itemIdentification) 1-unbounded</p> <p>- note: <i>identification of the single product unit contained in the list</i> (XPath KnitClothOrder/KCCObody/KCCOitem/progress/itemsList/itemIdentification) 1-unbounded</p> <p>- note: <i>identification of the single product unit contained in the list</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/itemIdentification) 1-unbounded</p> <p>- note: <i>identification of the single product unit contained in the list</i></p>
<b>itemsList</b>	<p>list of the single product units (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList) 0-unbounded</p> <p>- note: <i>it may be used to identify the pieces/chains that the Subcontractor must use for the commissioned work with multiple serial Ids for each one</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/itemsList) 0-1</p> <p>- note: <i>the usage in this position is alternative to its usage within the document line element</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/itemsList) 0-1</p> <p>- note: <i>the usage in this position is alternative to its usage within the document line element</i> (XPath KnitClothOrder/KCCObody/KCCOitem/progress/itemsList) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList) 0-1</p> <p>- note: <i>the usage in this position is alternative to its usage within the document line element</i></p>
<b>KCCObody</b>	<p>body of the document FASHION COMMISSION ORDER (ex GARMENT COMMISSION ORDER)</p> <p>(XPath KnitClothOrder/KCCObody) 1-1</p>
<b>KCCOheader</b>	<p>header of the document FASHION COMMISSION ORDER</p> <p>(XPath KnitClothOrder/KCCOheader) 1-1</p>
<b>KCCOitem</b>	<p>line of the document GARMENT COMMISSION ORDER</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem) 1-unbounded</p>
<b>lotDetails</b>	<p>details about the lot to be assigned to a group of items.</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails) 0-99</p>
<b>packageDim</b>	<p>dimensions of a transport package</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageDim) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageDim) 0-1</p>
<b>packages</b>	<p>describes the composition of the transport packaging. Each element corresponds to a type of package: type, quantity, hierarchic level, list of identifiers of the single packages</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages) 0-99 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages) 0-99</p>
<b>payment</b>	<p>payment details for payment all in one</p> <p>(XPath KnitClothOrder/terms/payment) 0-5</p> <p>- note: <i>excluded the case of offers, this set of data is alternative to insPayment, it can be iterated to specify alternative terms of payment (e.g.: 60 days or 30 days with 3% discount)</i></p>
<b>phase</b>	<p>a production phase of a fashion product.</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase) 0-99</p>
<b>piecePack</b>	<p>type of wrapping or packing of the fabric pieces</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/piecePack) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/piecePack) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/piecePack) 0-1 (XPath KnitClothOrder/garComInfo/piecePack) 0-1</p>
<b>progress</b>	<p>description of the progress of a production lot in a manufacturing process</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/progress) 0-9</p> <p>- note: <i>In this case the progress element states an expected date for the production steps.</i></p>
<b>refDoc</b>	<p>identification of a document and of an item thereof, to which the message makes refer</p>

	<p>ence  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc) 0-99  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc) 0-9  (XPath KnitClothOrder/KCCOheader/refDoc) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/refDoc) 0-9  - note: <i>here the delivery document can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/refDoc) 0-9  - note: <i>here the delivery documents can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/refDoc) 0-9</p>
<b>sizeMatrix</b>	<p>size matrix of an apparel product  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  csRange/sizeMatrix) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  csRange/sizeMatrix) 1-1</p>
<b>sizeRow</b>	<p>size matrix row of an apparel product  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow) 1-99  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  csRange/sizeMatrix/sizeRow) 1-99  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  csRange/sizeMatrix/sizeRow) 1-99</p>
<b>subContractor</b>	<p>details of the Sub-contractor  - base type: Nad,  (XPath KnitClothOrder/KCCOheader/subContractor) 1-1</p>
<b>terms</b>	<p>details of the commercial obligations for payment and delivery  (XPath KnitClothOrder/terms) 0-1</p>
<b>texCode</b>	<p>full codification of the textile product  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/texCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/texCode) 1-1  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode) 1-1</p>
<b>thirdParty</b>	<p>identification and details of the Third Party, different from Sender and Receiver of the document  - base type: Nad,  (XPath KnitClothOrder/KCCOheader/thirdParty) 0-5  - note: <i>here the Party to whom the Subcontractor must send the semi-finished products for subsequent operations can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty) 0-5</p>
<b>trade</b>	<p>general terms of trade for the specified supply  (XPath KnitClothOrder/terms/trade) 0-1</p>
<b>tradeLocation</b>	<p>data relating to the place to which the trade conditions refer (indicate at least element location or address, city and country)  - base type: Nad,  (XPath KnitClothOrder/terms/trade/tradeLocation) 0-1  - note: <i>address of the place to which the INCOTERM applies</i></p>
<b>transInfo</b>	<p>details of transport: mode, carrier and delivery place  (XPath KnitClothOrder/terms/transInfo) 0-5</p>
<b>yarnCode</b>	<p>full codification of a yarn product  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/yarnCode) 1-1  - note: <i>here is the code of the component used in the yarn manufacturing operation</i></p>



	(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode) 1-1
<b>yarnComponent</b>	identification details of a yarn used in a sub-contracted manufacturing operation (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent) 0-9
<b>yarnInWrap</b>	details specifying the inner wrapping of a yarn product (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnInWrap) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnInWrap) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnInWrap) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnInWrap) 0-1
<b>yarnPack</b>	details of type of presentation used for the yarn (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack) 0-1
<b>yarnReel</b>	details of the packaging of a yarn product (bobbin and reel,...) (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel) 1-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel) 1-1

## 2.2.2 Simple elements (Basic Business Information Entities)

Simple elements are those elements whose content is characterized by a data type plus a domain of possible values. Simple elements are alphabetically ordered.

<b>AC_amount</b>	amount of an Allowance or Charge - base type: decimal, fraction digits: 2, (XPath KnitClothOrder/terms/allowanceCharge/AC_amount) 1-1
<b>AC_category</b>	coded specification of an Allowance or Charge - base type: string, cod. table: T41 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T41.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T41.xml</a> (XPath KnitClothOrder/terms/allowanceCharge/AC_category) 1-1
<b>AC_categoryText</b>	free text description of an Allowance or Charge - base type: string, max length: 250, (XPath KnitClothOrder/terms/allowanceCharge/AC_categoryText) 1-1
<b>AC_percent</b>	amount of an Allowance or Charge as a percentage (always non negative value) - base type: decimal, max inclusive: 100, fraction digits: 2, (XPath KnitClothOrder/terms/allowanceCharge/AC_percent) 1-1
<b>acsPackCode</b>	code specifying the type of wrapping or packing used for the accessory - base type: string, (XPath KnitClothOrder/garComInfo/acsPack/acsPackCode) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/acsPack/acsPackCode) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/acsPack/acsPackCode) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/acsPack/acsPackCode) 1-1
<b>acsPackText</b>	free text specifying the type of wrapping or packing used for the accessory - base type: string, max length: 250, (XPath KnitClothOrder/KCCObody/KCCOitem/packages/

	<p>handlingChar/acsPack/acsPackText) 1-1  (XPath KnitClothOrder/garComInfo/acsPack/acsPackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/acsPack/acsPackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/acsPack/acsPackText) 1-1</p>
added	<p>additional code of the product (complementing the formers)  - base type: string, max length: 80,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/added) 0-19  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/added) 0-19  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/added) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/added) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/added) 0-19  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/added) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/added) 0-19  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/added) 0-9  - note: <i>here an additional codification (see table T44) can be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/added) 0-9</p>
additionalComponentCode	<p>an additional code to identify a fashion product or a part of it (it is a way to codify the item, but it is not one of the codes to identify it). It is not a serial identifier.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/additionalComponentCode) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/additionalComponentCode) 0-9  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/additionalComponentCode) 0-9</p>
additionalIdentifier	<p>additional identification code of a Party, for example customs registries or others  - base type: string, max length: 15,  (XPath KnitClothOrder/KCCOheader/buyer/additionalIdentifier) 0-9</p>



	<p>- note: identifiers for example for exports, such as MID (Manufacturer Identification Code), REX (identificatier in Registered Exporter system)</p>
<p>@addType</p>	<p>qualifier of the additional coding of a product</p> <p>- base type: string, cod. table: T44  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T44.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T44.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.</p>

	<p>is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/garmentPartCode/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/added/@addType) [Optional]</p> <p>- nota: addType allows the clarification of the meaning of the added element content; it is strongly suggested to use it always.</p>
appJob	<p>operation of a work cycle for garment manufacturing  - base type: string, cod. table: T205  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T205.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T205.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/appJob) 1-1</p>
appJobTech	<p>operation technology for garment production  - base type: string, cod. table: T265  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T265.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T265.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/appJobTech) 0-1</p>
@application	<p>force or similar condition (e.g. no. of revolutions) applied in a test as specified within the standard  - base type: string, max length: 15,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garMeaSet/garMea/specValue/@application) [Optional]</p>
appMachine	<p>machine used in an operation of a work cycle for garment production  - base type: string, cod. table: T275  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T275.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T275.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/appMachine) 0-1</p>
art	<p>article number of the product  - base type: string, max length: 80,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/yarnCode/art) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentCode/garmentCodeA/art) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/acsCode/art) 1-1  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/art)  1-1  - note: can be used either for the base-article (excluding pattern/colour) or for the SKU  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/art)  ) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/texCode/art) 1-1  - note: can be used either for the base-article (excluding pattern/colour) or for the SKU  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garmentCode/garmentCodeA/art) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/yarnCode/art) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/texCode/art) 1-1  - note: can be used either for the base-article (excluding pattern/colour) or for the SKU  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/art)  t) 1-1  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/  garmentCodeA/art) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/acsCode/art) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeA/art) 1-1</p>
artGroup	<p>code identifying a class of products  - base type: string, max length: 40,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garmentCode/garmentCodeB/artGroup) 0-1</p>

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeB/artGroup) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/artGroup) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ garmentCode/garmentCodeB/artGroup) 0-1</p>
binaryObject	<p>a binary large object containing an attached document, Coding 'base64Binary' is recommended.</p> <p>- base type: base64Binary,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ yarnComponent/refDoc/attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ acsComponent/refDoc/attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/refDoc/attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/ attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ garmentPartComponent/refDoc/attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ refDoc/attachment/binaryObject) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/ refDoc/attachment/binaryObject) 0-1</p>
brand	<p>A brand name.</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/brand) 0-1</p> <p>(XPath KnitClothOrder/garComInfo/brand) 0-1</p>
carrier	<p>identification of the transport carrier</p> <p>- base type: string, max length: 40,</p> <p>(XPath KnitClothOrder/terms/transInfo/carrier) 0-1</p>
@characterSet	<p>the character set of the binary object (examples UTF-8, UTF-16, Windows-1252, ISO-8859-7,..)</p> <p>- base type: normalizedString,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ refDoc/attachment/binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ acsComponent/refDoc/attachment/binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ garmentPartComponent/refDoc/attachment/binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/attachment/ binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/ attachment/binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/refDoc/attachment/binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/ refDoc/attachment/binaryObject/@characterSet) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ yarnComponent/refDoc/attachment/binaryObject/@characterSet) [Optional]</p>
characterSetCode	<p>the character set of an external document (examples UTF-8, UTF-16, Windows-1252, ISO-8859-7,..)</p> <p>- base type: normalizedString,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/ attachment/externalReference/characterSetCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/refDoc/attachment/externalReference/characterSetCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/ refDoc/attachment/externalReference/characterSetCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ refDoc/attachment/externalReference/characterSetCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ yarnComponent/refDoc/attachment/externalReference/characterSetCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ garmentPartComponent/refDoc/attachment/externalReference/characterSetCode) 0-1</p>

	<p>de) 0-1  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/externalReference/characterSetCode) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/externalReference/characterSetCode) 0-1</p>
city	<p>name of the city (town, village)  - base type: string, max length: 40,  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/city) 0-1  (XPath KnitClothOrder/KCCOheader/thirdParty/city) 0-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/city) 0-1  (XPath KnitClothOrder/terms/trade/tradeLocation/city) 0-1  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/city) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/city) 0-1  (XPath KnitClothOrder/KCCOheader/subContractor/city) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/city) 0-1</p>
@codeList	<p>it specifies the URL where the list of codes used to make an instance of the element can be found  - base type: string, max length: 255,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/garSizeCode/@codeList) [Optional]  - nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/fabric/@codeList) [Optional]  - nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType/@codeList) [Optional]  - nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/color/@codeList) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/drop/@codeList) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/note/@codeList) [Optional]  - nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/size/@codeList) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/mod/@codeList) [Optional]  - nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant/variantType/@codeList) [Optional]  - nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/productLine/@codeList) [Optional]  - nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/legalRef/@codeList) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/note/@codeList) [Optional]  - nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/color/@codeList) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/@codeList) [Optional]  - nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeA/art/@codeList) [Optional]  - nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/note/@codeList) [Optional]  - nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/color/@codeList) [Optional]</p>

	<p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  csRange/garmentVariant/variantCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/fabric/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  operationalCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentPartCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/texCode/pattern/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeA/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/size/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentPartCode/fabric/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentPartCode/fabric/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/garmentPartCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/garPack/garPackCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  csRange/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/acsCode/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  handlingChar/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/mod/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i>  (XPath KnitClothOrder/garComInfo/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/yarnCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentPartCode/size/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/note/@codeList) [Optional]</p>
--	---



- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/legalRef/@codeList) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/acsCode/color/@codeList) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/sizeMatrix/sizeRow/drop/@codeList) [Optional]  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeA/art/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/artGroup/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/progress/  
itemsList/qualityLevel/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/garmentVariant/variantCode/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
garmentPartComponent/garmentPartCode/fabric/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/acsCode/pattern/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/sizeMatrix/sizeRow/additionalComponentCode/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/mod/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
garmentPartComponent/note/@codeList) [Optional]

- nota: *must be used to provide (URL) the list of codes used in "noteLabel"*  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/garSizeCode/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/acsCode/art/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/progress/  
qualityLevel/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/season/@codeList) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/acsCode/pattern/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeA/art/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/size/@codeList) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/garmentVariant/variantCode/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/sizeMatrix/sizeRow/size/@codeList) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/garmentPartCode/mod/@codeList) [Optional]

- nota: *at least one out of this attribute and "numberingOrg" should be set*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/size/@codeList) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/

	<p>garConsumptionSet/yarnCode/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ garmentCode/garmentCodeB/garmentVariant/variantType/@codeList) [Optional]</p> <p>- nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/drop/@codeList) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/ csRange/drop/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/artGroup/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ garmentCode/garmentCodeB/size/@codeList) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/brand/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCOheader/refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ yarnComponent/yarnCode/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ acsComponent/refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ garmentCode/garmentCodeB/drop/@codeList) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ garmentPartComponent/garmentPartCode/mod/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/texCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garmentCode/garmentCodeB/garmentVariant/variantCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ csRange/drop/@codeList) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeB/mod/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/ season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/itemsList/qualityLevel/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/packages/ handlingChar/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i></p>
--	--

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/fabric/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/drop/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/size/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/additionalComponentCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/fabric/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/acsPack/acsPackCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/pattern/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/garComInfo/brand/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/garComInfo/operationalCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/garComInfo/productLine/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantType/@codeList) [Optional]</p> <p>- nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/acsPack/acsPackCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/garmentVariant/variantType/@codeList) [Optional]</p> <p>- nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/pattern/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p>
--	--



	<p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garSizeSet/garSizeTier/garSizeCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garmentCode/garmentCodeB/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/additionalComponentCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/size/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/phase/garConsumptionSet/texCode/art/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/apparelComponent/fabricComponent/refDoc/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/size/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/phase/packages/handlingChar/garPack/garPackCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garmentCode/garmentCodeB/artGroup/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/phase/phaseCode/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/artGroup/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garConsumptionSet/acsCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/drop/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garComInfo/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/size/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/apparelProd/csRange/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/phase/garConsumptionSet/garmentPartCode/fabric/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/garTecSheet/garmentCode/garmentCodeB/drop/@codeList) [Optional]</p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/phase/garConsumptionSet/garmentPartCode/color/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/apparelProd/garmentPartCode/mod/@codeList) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i></p> <p>(XPath KnitClothOrder/KCCOheader/note/@codeList) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCOheader/season/@codeList) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObdy/KCCOitem/appMnfrOperation/</p>
--	---

	<p><code>note/@codeList</code> [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/acsPack/acsPackCode/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack/garPackCode/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/art/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/color/@codeList</code>) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/color/@codeList</code>) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/dtScheme/note/@codeList</code>) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/pattern/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/size/@codeList</code>) [Optional]</p> <p>(XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/art/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/garComInfo/acsPack/acsPackCode/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/color/@codeList</code>) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantType/@codeList</code>) [Optional]</p> <p>- nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/mod/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/color/@codeList</code>) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath <code>KnitClothOrder/garComInfo/note/@codeList</code>) [Optional]</p> <p>- nota: <i>must be used to provide (URL) the list of codes used in "noteLabel"</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantCode/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/garComInfo/garPack/garPackCode/@codeList</code>) [Optional]</p> <p>- nota: <i>at least one out of this attribute and "numberingOrg" should be set</i> (XPath <code>KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/drop/@codeList</code>) [Optional]</p> <p>(XPath <code>KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType/@codeList</code>) [Optional]</p> <p>- nota: <i>always at least one out of this attribute and "numberingOrg" should be set</i></p>
<code>@codeQualifier</code>	<p>operational code qualifier: it states if the code is related to a project, an event, an initiative, a sales channel, a management type (eg CITES), .....</p> <p>- base type: string, cod. table: NT43 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT43.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT43.xml</a> (XPath <code>KnitClothOrder/garComInfo/operationalCode/@codeQualifier</code>) [Optional]</p>

	(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/operationalCode/@codeQualifier) [Optional]
color	<p>colour number of the product, when not included in the model or fabric code</p> <p>- base type: string, max length: 15, (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/color) 0-1</p> <p>- note: <i>used only if not already specified in the article code</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/color) 0-1</p> <p>- note: <i>used only if not already specified in the article code</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/color) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/color) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/color) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/color) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/color) 0-1</p> <p>- note: <i>used only if not already specified in the article code</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/color) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/color) 0-1</p>
@consumptionType	<p>indicates what the indicated quantity is referred to (for example, required quantity for unit of product -BoM- or required quantity to obtain the indicated total amount of product -BoL-)</p> <p>- base type: string, cod. table: NT39 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT39.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT39.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/@consumptionType) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/</p>

	<b>garConsumptionSet/garConsumption/@consumptionType) [Optional]</b>
country	code of the nation - base type: string, cod. table: T10 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T10.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T10.xml</a> (XPath KnitClothOrder/KCCOheader/thirdParty/country) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/country) 0-1 (XPath KnitClothOrder/terms/transInfo/despatchLocation/country) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/country) 0-1 (XPath KnitClothOrder/KCCOheader/subContractor/country) 0-1 (XPath KnitClothOrder/terms/transInfo/deliveryLocation/country) 0-1 (XPath KnitClothOrder/terms/trade/tradeLocation/country) 0-1 (XPath KnitClothOrder/KCCOheader/buyer/country) 0-1
@CQQ	specifies if the committed quantity can or can not include the loss in weight - base type: string, cod. table: NT37 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT37.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT37.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/@CQQ) [Optional]
criticalityIndicator	criticality indicator (it can be "true" ort "false": true = criticality, false = non criticality) - base type: boolean, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/criticalityIndicator) 0-1
@currency	currency in which a specified monetary data is expressed - base type: string, cod. table: T9 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/price/@currency) [Optional] - nota: <i>Currency referred by the price.</i> (XPath KnitClothOrder/terms/allowanceCharge/AC_amount/@currency) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/price/@currency) [Optional] - nota: <i>Currency referred by the price.</i> (XPath KnitClothOrder/terms/allowanceCharge/@currency) [Optional]
customsStat	statistic code assigned by Customs to a specified product (TARIC code) - base type: string, max length: 15, (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/customsStat) 0-1
@CV	coefficient of variation (CV) of a measurement - base type: decimal, (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/specValue/@CV) [Optional]
@dateForm	format used for the date - base type: string, cod. table: NT29 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT29.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT29.xml</a> (XPath KnitClothOrder/garComInfo/specDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/docDate/@dateForm) [Optional] (XPath KnitClothOrder/garComInfo/deliveryDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/docDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCOheader/validityStart/@dateForm) [Optional] (XPath KnitClothOrder/KCCOheader/msgDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/docDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/deliveryDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/specDate/@dateForm) [Optional] (XPath KnitClothOrder/terms/transInfo/despatchDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCOheader/refDoc/docDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/deliveryDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/deliveryDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/notBeforeDate/@dateForm) [Optional] (XPath KnitClothOrder/terms/transInfo/delEffectiveDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/delGrantedDate/@dateForm) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/

	<p>refDoc/docDate/@dateForm) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/delGrantedDate/@dateForm) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/deliveryDate/@dateForm) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/docDate/@dateForm) [Optional]  (XPath KnitClothOrder/KCCOheader/validityEnd/@dateForm) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/docDate/@dateForm) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/docDate/@dateForm) [Optional]</p>
delEffectiveDate	<p>actual delivery date (estimated or occurred in case of receipt docs), it might be different from what agreed between the parties. Format according to one of the patterns indicated by the dateForm attribute: YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.  - base type: string,  (XPath KnitClothOrder/terms/transInfo/delEffectiveDate) 0-1</p>
delGrantedDate	<p>effective granted date of delivery of goods; in case of doubt delivery must be understood as the event when the ownership of goods is transferred, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/delGrantedDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/delGrantedDate) 0-1</p>
deliveryDate	<p>date of delivery of goods, requested or promised in the purchase process, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.  - base type: string,  (XPath KnitClothOrder/garComInfo/deliveryDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/deliveryDate) 0-1  - note: <i>Delivery date should not be used here when the garComInfo.element is used.</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/deliveryDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/deliveryDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/deliveryDate) 0-1</p>
deliveryPlace	<p>place of delivery of goods, ultimate or related to a given leg  - base type: string, max length: 250,  (XPath KnitClothOrder/terms/transInfo/deliveryPlace) 0-1  - note: <i>use to represent addresses with a unique text string</i></p>
dept	<p>name or code of a department  - base type: string, max length: 40,  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/dept) 0-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/dept) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/dept) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/dept) 0-1  (XPath KnitClothOrder/terms/trade/tradeLocation/dept) 0-1  (XPath KnitClothOrder/KCCOheader/thirdParty/dept) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/dept) 0-1  (XPath KnitClothOrder/KCCOheader/subContractor/dept) 0-1</p>
description	<p>free text description. The content of the element must be unique, it might be translated and repeated into more languages (thus no more than one instance for each language).</p> <p>- base type: string, max length: 250,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/description) 0-unbounded  - note: <i>Product description</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/description) 0-unbounded  - note: <i>Product description</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeA/description) 0-unbounded  - note: <i>Product description</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/description) 0-unbounded  - note: <i>Product description</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/description) 0-unbounded  - note: <i>Product description</i></p>

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/description) 0-unbounded</p> <p>- note: <i>Product part description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/description) 0-unbounded</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeA/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/description) 0-unbounded</p> <p>- note: <i>Product part description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/description) 0-unbounded</p> <p>- note: <i>Product part description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeA/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/packages/description) 0-unbounded</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/description) 0-unbounded</p> <p>- note: <i>Product part description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeA/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/description) 0-unbounded</p> <p>- note: <i>Product description</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/description) 0-unbounded</p> <p>- note: <i>Product description</i></p>
despatchDate	<p>date of despatch of goods, requested or promised in the purchase process, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string, (XPath KnitClothOrder/terms/transInfo/despatchDate) 0-1</p>
despatchPlace	<p>place of despatch of goods, origin or related to a given leg</p> <p>- base type: string, max length: 250, (XPath KnitClothOrder/terms/transInfo/despatchPlace) 0-1</p> <p>- note: <i>use to represent addresses with a unique text string</i></p>
docDate	<p>date of issue of the referenced document, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string, (XPath KnitClothOrder/KCCOheader/refDoc/docDate) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/</p>



	<p>refDoc/docDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/docDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/docDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/docDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/docDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/docDate) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/docDate) 0-1</p>
docID	<p>identification number of the referenced document  - base type: string, max length: 80,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCOheader/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCOheader/docID) 0-1  - note: <i>Its use in HEADER elements is discouraged (use msgID)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/docID) 1-2 Best Practice  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/docID) 1-2 Best Practice</p>
@docType	<p>type or class to which the referenced document belongs  - base type: string, cod. table: T21  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T21.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T21.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCOheader/refDoc/@docType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/@docType) [Required]</p>
drop	<p>drop number of the garment  - base type: string, max length: 15,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/drop) 0-1  - note: <i>DEPRECATED, anyhow it is used only if not already specified in the article code or csRange</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/drop) 0-1  - note: <i>used only if not already specified in the article code</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/drop) 0-1  - note: <i>used only if not already specified in the article code</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/drop) 0-1  - note: <i>Fill this element if the drop is the same for all the sizes of the model. Otherway specify it within the csRange element</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/drop) 0-1  - note: <i>DEPRECATED, anyhow it is used only if not already specified in the article code or csRange</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/drop) 0-1</p>

	<p>- note: <i>Fill this element if the drop is the same for all the sizes of the model. Otherway specify it within the csRange element</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/drop) 0-1</p> <p>- note: <i>used only if not already specified in the article code</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/drop) 0-1</p> <p>- note: <i>DEPRECATED, anyhow it is used only if not already specified in the article code or csRange</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/drop) 0-1</p> <p>- note: <i>Fill this element if the drop is the same for all the sizes of the model. Otherway specify it within the csRange element</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/drop) 0-1</p> <p>- note: <i>Fill this element if the drop is the same for all the sizes of the model. Otherway specify it within the csRange element</i></p>
dyeN	<p>number of the dying batch of a textile product</p> <p>- base type: string, max length: 15,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/dyeN) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/dyeN) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/dyeN) 0-99  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/dyeN) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/dyeN) 0-99  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/dyeN) 0-1</p>
@email	<p>electronic mail address of the contact person within a Party</p> <p>- base type: string, max length: 250,  (XPath KnitClothOrder/KCCOheader/subContractor/person/@email) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/person/@email) [Optional]  (XPath KnitClothOrder/terms/trade/tradeLocation/person/@email) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/person/@email) [Optional]  (XPath KnitClothOrder/KCCOheader/buyer/person/@email) [Optional]  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/person/@email) [Optional]  (XPath KnitClothOrder/KCCOheader/thirdParty/person/@email) [Optional]  (XPath KnitClothOrder/terms/transInfo/despatchLocation/person/@email) [Optional]</p>
@encoding	<p>specifies the decoding algorithm of the binary object</p> <p>- base type: normalizedString,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/binaryObject/@encoding) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/binaryObject/@encoding) [Optional]</p>
encodingCode	<p>the encoding/decoding algorithm used with the external object (example is 'base64Binary')</p> <p>- base type: normalizedString,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/externalReference/encodingCode) 0-1</p>



	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/externalReference/encodingCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/externalReference/encodingCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/externalReference/encodingCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/externalReference/encodingCode) 0-1</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/attachment/externalReference/encodingCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/externalReference/encodingCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/externalReference/encodingCode) 0-1</p>
@endUse	<p>specifies the final use of the fabric</p> <p>- base type: string, cod. table: NT4</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT4.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT4.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/@endUse) [Optional]</p> <p>- nota: <i>When used for garments, use only PR: Production or SA: Sample codes.</i></p> <p>(XPath KnitClothOrder/garComInfo/@endUse) [Optional]</p> <p>- nota: <i>When used for garments, use only PR: Production or SA: Sample codes.</i></p>
endUseGroupld	<p>group identifier.</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/endUseGroupld) 1-1</p>
EPC	<p>serial identifier used for tracing a physical item with RFID technology</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/EPClist/EPC) 1-unbounded</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/EPClist/EPC) 1-unbounded</p>
fabric	<p>fabric number of the garment</p> <p>- base type: string, max length: 15,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/fabric) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/fabric) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/fabric) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/fabric) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/fabric) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/fabric) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/fabric) 0-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/fabric) 0-1</p>
@fax	<p>fax number of the contact person within a Party</p> <p>- base type: string, max length: 35,</p> <p>(XPath KnitClothOrder/KCCOheader/buyer/person/@fax) [Optional]</p> <p>(XPath KnitClothOrder/terms/transInfo/deliveryLocation/person/@fax) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/person/@fax) [Optional]</p> <p>(XPath KnitClothOrder/terms/transInfo/despatchLocation/person/@fax) [Optional]</p>

	(XPath KnitClothOrder/KCCOheader/subContractor/person/@fax) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/person/@fax) [Optional] (XPath KnitClothOrder/terms/trade/tradeLocation/person/@fax) [Optional] (XPath KnitClothOrder/KCCOheader/thirdParty/person/@fax) [Optional]
@fibre	type of fibre used in a textile product - base type: string, cod. table: T19 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T19.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T19.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos/@fibre) [Required]
fileName	unique identifier (name) of the file - base type: string, max length: 255, (XPath KnitClothOrder/KCCOheader/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/fileName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/fileName) 0-1
fillingCriterion	the assortment criterion to fill the specified kind of package: it states the homogeneity criterion (eg: "model", "color", "size"). - base type: string, cod. table: NT51 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT51.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT51.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/packages/fillingCriterion) 0-9 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/fillingCriterion) 0-9
finalIndicator	final phase indicator. - base type: boolean, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/finalIndicator) 0-1
@finDiscount	financial discount rate applied for payment by the date specified - base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2, (XPath KnitClothOrder/terms/payment/@finDiscount) [Optional]
@finSurcharge	financial surcharge rate applied for payment after the date specified - base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2, (XPath KnitClothOrder/terms/payment/@finSurcharge) [Optional]
@format	the format of the binary content (examples xml, pdf, doc,...) - base type: string, (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCOheader/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/binaryObject/@format) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/binaryObject/@format) [Optional]
formatCode	the format of the external object (examples xml, pdf, doc,...) - base type: normalizedString, (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/externalReference/formatCode) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/externalReference/formatCode) 0-

	<p>1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/externalReference/formatCode) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/externalReference/formatCode) 0-1  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/externalReference/formatCode) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/externalReference/formatCode) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/externalReference/formatCode) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/externalReference/formatCode) 0-1</p>
garAttrib	<p>garment's attribute to which the measures are referred  - base type: string, cod. table: NT41  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT41.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT41.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garAttrib) 1-1</p>
garPackCode	<p>a code specifying the type of packaging used for the item.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack/garPackCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/garPack/garPackCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/garPack/garPackCode) 1-1  (XPath KnitClothOrder/garComInfo/garPack/garPackCode) 1-1</p>
garPackText	<p>a free text specifying the type of packaging used for the item.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/garPack/garPackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/garPack/garPackText) 1-1  (XPath KnitClothOrder/garComInfo/garPack/garPackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack/garPackText) 1-1</p>
garSizeCode	<p>code of a range of sizes  - base type: string, max length: 15,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/garSizeCode) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/garSizeTier/garSizeCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/garSizeCode) 0-1</p>
@geoRefSystem	<p>georeference system adopted for the coordinate (in example wgs84 with decimal degree o degree with minute and seconds)  - base type: string,  (XPath KnitClothOrder/KCCOheader/subContractor/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/terms/trade/tradeLocation/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/terms/transInfo/despatchLocation/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/KCCOheader/buyer/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/KCCOheader/thirdParty/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/geoCoordinates/@geoRefSystem) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/geoCoordinates/@geoRefSystem) [Optional]</p>
gPart	<p>code specifying the type of component or part of a fashion product (sleeve, neck, ...)  - base type: string, cod. table: T48</p>

	<p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T48.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T48.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentPartCode/gPart) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPart  Code/gPart) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/garmentPartCode/gPart) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentPartCode/gPart) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/gPart) 0-1</p>
grossWeight	<p>the gross weight, declared for transport or customs purpose  - base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/grossWeight) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/grossWeight) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  handlingChar/grossWeight) 0-1  (XPath KnitClothOrder/terms/transInfo/grossWeight) 0-1</p>
handlingType	<p>information to handle the item (eg "breakable").  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/handlingType) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  handlingChar/handlingType) 0-1</p>
hashFootprint	<p>footprint obtained by applying an hashing alorythm  - base type: string, max length: 80,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/refDoc/attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/  attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/refDoc/attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/refDoc/attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  refDoc/attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/attachment/hashFootprint) 0-1  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/hashFootprint) 0-1</p>
@hashMethod	<p>type of used hashing alorythm  - base type: string, max length: 80, cod. table: NT333  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT333.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT333.xml</a>  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/  hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/attachment/hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/attachment/hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/  attachment/hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  refDoc/attachment/hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/refDoc/attachment/hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/refDoc/attachment/hashFootprint/@hashMethod) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/refDoc/attachment/hashFootprint/@hashMethod) [Re  quired]</p>
height	<p>effective height of a specified object  - base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  packageDim/height) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/</p>

	packageDim/height) 0-1
id	<p>primary identification code of a Party; it is recommended to use an EORI number (with @numberingOrg= "EO") or the format: nation code (ISO 3166) + national tax code (i.e. VAT identification number ) with @numberingOrg= "MF"</p> <p>- base type: string, max length: 15,  (XPath KnitClothOrder/KCCOheader/subContractor/id) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/id) 1-1  (XPath KnitClothOrder/KCCOheader/thirdParty/id) 1-1  (XPath KnitClothOrder/KCCOheader/buyer/id) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/id) 1-1</p>
@idQualifier	<p>Qualification of the identifier.</p> <p>- base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/itemIdentification/serialN/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of serial identifier  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/serialN/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of serial identifier  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of serial identifier  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/itemsList/itemIdentification/serialN/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of serial identifier  (XPath KnitClothOrder/KCCOheader/buyer/additionalIdentifier/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of identifier  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of serial identifier  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN/@idQualifier) [Optional]</p> <p>- nota: this attribute should be used when the numberingOrg attribute is not enough to declare the type of serial identifier</p>
image	<p>URL address of an annexed image</p> <p>- base type: string, max length: 255,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/image) 0-99</p>
incoTerm	<p>specification of the terms of trade (INCOTERMS)</p> <p>- base type: string, cod. table: T3  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T3.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T3.xml</a>  (XPath KnitClothOrder/terms/trade/incoTerm) 1-1</p>
incoTermText	<p>free text specifying the terms of trade (incoterm, location)</p> <p>- base type: string, max length: 250,  (XPath KnitClothOrder/terms/trade/incoTermText) 1-1</p>
@isCharge	<p>Indicates if the element to which it refers is a charge (true = charge, false = allowance)</p> <p>- base type: boolean,  (XPath KnitClothOrder/terms/allowanceCharge/@isCharge) [Optional]</p>
@isURL	<p>it indicates if the referred element is an URL (true) or not (false)</p> <p>- base type: boolean,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/blockChainReference/uri/@isURL) [Optional] [Default= true]</p> <p>- nota: usage of URLs is recommended  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/blockChainReference/uri/@isURL) [Optional]</p>

	<p>al] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/  externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/  attachment/blockChainReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/  blockChainReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  refDoc/attachment/blockChainReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/attachment/blockChainReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/attachment/blockChainReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/refDoc/attachment/blockChainReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/  attachment/externalReference/uri/@isURL) [Optional] [Default= true]  - nota: <i>usage of URLs is recommended</i></p>
itemID	<p>number of the line/item of the referenced document  - base type: string, max length: 40,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCOheader/refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/itemID) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  refDoc/itemID) 0-1</p>
itemsPerPackage	<p>the quantity of items that can be contained in a package.  - base type: decimal,  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/itemsPerPackage) 0-1</p>



	(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/itemsPerPackage) 0-1
jobName	description of the elementary job - base type: string, max length: 40, (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/jobName) 1-1
@KCCOtype	type of Order. - base type: string, cod. table: NT1 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT1.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT1.xml</a> (XPath KnitClothOrder/@KCCOtype) [Optional]
label	indicates if the physical object specified has to be labelled - base type: boolean, (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/label) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnInWrap/label) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/label) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnInWrap/label) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/label) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnInWrap/label) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/label) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnInWrap/label) 0-1
labelWrit	text that must be written on the lable of a specified physical object when its customizati on is required - base type: string, max length: 350, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnInWrap/labelWrit) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnInWrap/labelWrit) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/labelWrit) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnInWrap/labelWrit) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/labelWrit) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/labelWrit) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/labelWrit) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnInWrap/labelWrit) 0-1
legalName	legal name - base type: string, max length: 250, (XPath KnitClothOrder/KCCOheader/thirdParty/legalName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/legalName) 0-1 (XPath KnitClothOrder/KCCOheader/subContractor/legalName) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/legalName) 0-1 (XPath KnitClothOrder/KCCOheader/buyer/legalName) 0-1 (XPath KnitClothOrder/terms/transInfo/deliveryLocation/legalName) 0-1 (XPath KnitClothOrder/terms/trade/tradeLocation/legalName) 0-1 (XPath KnitClothOrder/terms/transInfo/despatchLocation/legalName) 0-1
legalRef	legal reference of the duty or tax or fee category - base type: string, (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/legalRef) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/legalRef) 0-1
length	effective length of a specified object - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageDim/length) 1-1 - note: <i>here the maximum dimension must also be specified</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageDim/length) 1-1 - note: <i>here the maximum dimension must also be specified</i>
lineID	unique identifier of the line item of the business document; it is set by the role that prod uces the document.

	<p>- base type: string, max length: 30, (XPath KnitClothOrder/KCCObody/KCCOitem/lineID) 0-1</p>
lineN	<p>number of the line item of the present message (xml document); it is set by the role that produces the document. Usually it is a progressive number, but not always. - base type: positiveInteger, min inclusive: 1, max inclusive: 9999, (XPath KnitClothOrder/KCCObody/KCCOitem/lineN) 1-1</p>
@listName	<p>the name of the list of codes used to make an instance of the element (it might be thought as descriptive element, i.e. 'fabric printing technologies', or not, i.e. "T264") - base type: string, max length: 40, (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/mod/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/size/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/fabric/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantType/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/mod/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/acsPack/acsPackCode/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/color/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/fabric/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/garComInfo/productLine/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/color/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/season/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/drop/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/color/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/artert/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/color/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/season/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/garPack/garPackCode/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant/variantType/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantCode/@listName) [Optional] - nota: <i>this attribute should always be used coupled with "numberingOrg"</i> (XPath KnitClothOrder/garComInfo/operationalCode/@listName) [Optional]</p>



- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/progress/  
itemsList/qualityLevel/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/terms/allowanceCharge/dtScheme/  
legalRef/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/yarnCode/art/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/garComInfo/garPack/garPackCode/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/garComInfo/season/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  
csRange/color/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/col  
or/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/garmentVariant/variantCode/@listName) [Option  
al]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/size/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/drop/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/sizeMatrix/sizeRow/drop/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCOheader/refDoc/season/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/pat  
tern/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/art  
/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/yarnCode/color/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/artGroup/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/refDoc/season/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/garmentVariant/variantType/@listName) [Option  
al]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/garComInfo/brand/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/pat  
tern/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/sizeMatrix/sizeRow/additionalComponentCode/@listName) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/

	<p>csRange/sizeMatrix/sizeRow/size/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/acsPack/acsPackCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeA/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/phaseCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/drop/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack/garPackCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/progress/qualityLevel/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCOheader/season/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/mod/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantType/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/size/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/fabric/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/garSizeCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/qualityLevel/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/mod/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeA/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/legalRef/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p>
--	---

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/drop/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/mod/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/size/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/garSizeTier/garSizeCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/brand/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/size/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/artGroup/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/season/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/drop/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/pattern/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/acsPack/acsPackCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/size/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/artGroup/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/garPack/garPackCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/size/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeA/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/</p>
--	---

	<p>acsComponent/acsCode/art/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/acsCode/pattern/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/season/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow/drop/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/acsCode/pattern/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/yarnCode/art/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/texCode/art/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  csRange/drop/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/garmentPartCode/size/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/garComInfo/acsPack/acsPackCode/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPart  Code/size/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow/additionalComponentCode/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/size/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentPartCode/size/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/artGroup/@listName) [Optio  nal]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCod  e/garmentCodeB/mod/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/garmentPartCode/color/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPart  Code/fabric/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPart  Code/mod/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/garmentPartCode/fabric/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garConsumption/garSizeCode/@listName) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/</p>
--	---



	<p>garmentPartCode/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeA/art/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPart Code/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/ csRange/garmentVariant/variantCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ csRange/sizeMatrix/sizeRow/additionalComponentCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/ season/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ csRange/garmentVariant/variantType/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCod e/garmentCodeB/garmentVariant/variantCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/texCode/pattern/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ garmentCode/garmentCodeB/mod/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType /@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ garmentPartComponent/refDoc/season/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/ productLine/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ garmentCode/garmentCodeB/fabric/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeB/fabric/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeB/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCod e/garmentCodeB/drop/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCod e/garmentCodeB/color/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/ operationalCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ garConsumptionSet/garmentCode/garmentCodeB/drop/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/ csRange/garmentVariant/variantCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCod e/garmentCodeB/fabric/@listName) [Optional]</p>
--	--

	<p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/season/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/@listName) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg”</i></p>
@listVersion	<p>it specifies the version of the list of codes used to make an instance of the element - base type: string, max length: 6, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantCode/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/garComInfo/acsPack/acsPackCode/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/additionalComponentCode/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/drop/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/drop/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/qualityLevel/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/color/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/season/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/fabric/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantType/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/color/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/season/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/size/@listVersion) [Optional]</p> <p>- nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i> (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/garmentVariant/variantCode/@listVersion) [Optional]</p>

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/mod/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/garmentVariant/variantType/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/acsCode/color/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/refDoc/season/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/drop/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/artGroup/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeB/garmentVariant/variantCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
garmentCode/garmentCodeA/art/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/acsCode/pattern/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/acsCode/art/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
garmentPartComponent/garmentPartCode/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCOheader/refDoc/season/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/sizeMatrix/sizeRow/drop/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/sizeMatrix/sizeRow/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/phaseCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/season/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/garComInfo/garPack/garPackCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantType/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/additionalComponentCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/additionalComponentCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/size/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/drop/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/mod/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/mod/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/drop/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/fabric/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/fabric/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/fabric/@listVersion) [Optional]  - nota: this attribute should always be used coupled with "numberingOrg" and "listName"</p> <p>(XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCod</p>
--	--



	<p>e/garmentCodeA/art/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentPartCode/mod/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/art/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/color/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garConsumption/garSizeCode/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/color/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garSizeSet/garSizeTier/garSizeCode/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/fabric/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/mod/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentPartCode/color/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/season/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/pattern/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garmentCode/garmentCodeA/art/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/art/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/yarnCode/color/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/  qualityLevel/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i></p>
--	--

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/progress/  
itemsList/qualityLevel/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/garSizeCode/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garMeaSet/garMea/size/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/color/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/season/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  
acsPack/acsPackCode/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/garmentCode/garmentCodeB/mod/@listVersion) [Optional]  
]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType/  
/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/  
/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/color/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/size/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath  
KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/drop/@listVersion) [Optional]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/garmentCode/garmentCodeB/fabric/@listVersion) [Optional]  
al]  
- nota: this attribute should always be used coupled with “numberingOrg” and “listName”

e”  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/garmentCode/garmentCodeB/color/@listVersion) [Optional]  
l]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/productLine/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/drop/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/artGroup/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeA/art/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/brand/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/artGroup/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/operationalCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/fabric/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/legalRef/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/mod/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/art/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/color/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/garComInfo/productLine/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/mod/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  
handlingChar/acsPack/acsPackCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/garComInfo/operationalCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCOheader/season/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/packages/  
handlingChar/garPack/garPackCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/garComInfo/brand/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/color/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/fabric/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/texCode/pattern/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  
handlingChar/garPack/garPackCode/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
fabricComponent/texCode/color/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
fabricComponent/texCode/pattern/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  
csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  
csRange/sizeMatrix/sizeRow/size/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/drop/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
fabricComponent/texCode/art/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/texCode/art/@listVersion) [Optional]

- nota: *this attribute should always be used coupled with “numberingOrg” and “listName”*

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/acsPack/acsPackCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant/variantType/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/season/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant/variantCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/season/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/drop/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/pattern/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack/garPackCode/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/pattern/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/art/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/artGroup/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/color/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/size/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantType/@listVersion) [Optional]  - nota: this attribute should always be used coupled with “numberingOrg” and “listName”</p>
--	--

	<p>e”  (XPath KnitClothOrder/garComInfo/season/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  e”  (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/legalRef/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  e”  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/art/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  e”  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/art/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  e”  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantCode/@listVersion) [Optional]  - nota: <i>this attribute should always be used coupled with “numberingOrg” and “listName”</i>  e”</p>
@In	<p>Language code.  - base type: string, cod. table: NT60  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT60.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT60.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/handlingType/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/description/@In) [Optional]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/description/@In) [Optional]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeA/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeA/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeA/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/handlingType/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/description/@In) [Optional]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/description/@In) [Optional]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/description/@In) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeA/description/@In) [Optional]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/description/@In) [Optional]</p>



	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/yarnCode/description/@In) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/description/@In) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/description/@In) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/description/@In) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/description/@In) [Optional]</p>
location	<p>specification of a location. It can be represented by an identification code (preferable) or a short text (not recommended). For example a GLN code that requires to assign the value "GLN" to the attribute @LRI.</p> <p>- base type: string, max length: 128,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/location) 0-1</p> <p>- note: <i>it may be used to specify the location where lie the pieces that the Subcontract or must use for the commissioned work operation</i></p> <p>(XPath KnitClothOrder/terms/transInfo/despatchLocation/location) 0-1</p> <p>- note: <i>Use this element to specify a numeric ID of the location, for example a GLN code (in this case @SchemeID='GS1 GLN')</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/location) 0-1</p> <p>(XPath KnitClothOrder/terms/trade/tradeLocation/location) 0-1</p> <p>- note: <i>Use this element to specify a numeric ID of the location, for example a GLN code (in this case @SchemeID='LRI='GLN')</i></p> <p>(XPath KnitClothOrder/terms/transInfo/deliveryLocation/location) 0-1</p> <p>- note: <i>Use this element only to indicate an identification code of this place.</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/location) 0-1</p> <p>(XPath KnitClothOrder/terms/trade/location) 0-1</p> <p>- note: <i>code number of the place to which the INCOTERM applies</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/location) 0-1</p> <p>- note: <i>here the storage place of the component can be specified</i></p>
@logo	<p>company logo (URL of the image jpeg or gif). It is recommended that the width of the image does not exceed 640 pixel.</p> <p>- base type: string, max length: 255,</p> <p>(XPath KnitClothOrder/KCCOheader/buyer/@logo) [Optional]</p>
lotN	<p>lot number of a product or batch number of the raw material</p> <p>- base type: string, max length: 15,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/lotN) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/lotN) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/lotN) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/lotN) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/lotN) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/lotN) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/lotN) 1-1</p>
@LRI	<p>issuer of the identifier (or identification system) of a location.</p> <p>- base type: string, cod. table: NT3</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT3.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT3.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/location/@LRI) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/location/@LRI) [Optional]</p> <p>(XPath KnitClothOrder/terms/transInfo/deliveryLocation/location/@LRI) [Optional]</p> <p>(XPath KnitClothOrder/terms/trade/tradeLocation/location/@LRI) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/location/@LRI) [Optional]</p> <p>(XPath KnitClothOrder/terms/transInfo/despatchLocation/location/@LRI) [Optional]</p>

	(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/location/@LRI) [Optional] (XPath KnitClothOrder/terms/trade/location/@LRI) [Optional]
@materialSource	Indicates whether the material is virgin or comes from recycling or reuse processes - base type: string, cod. table: T306 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T306.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T306.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos/@materialSource) [Optional]
@maxQty	maximum product quantity - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath KnitClothOrder/terms/allowanceCharge/@maxQty) [Optional] - nota: <i>maximum quantity of product for the application of this allowance or charge</i>
@method	standard protocol or method employed in a test to evaluate a characteristic or a parameter - base type: string, max length: 80, (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/specValue/@method) [Optional]
mfrStatus	code of the manufacturing stage used to describe the progress in the production cycle - base type: string, cod. table: T7 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T7.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T7.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/progress/mfrStatus) 0-1
mfrStatusText	free text description of the manufacturing stage used to specify the progress in the production cycle - base type: string, max length: 250, (XPath KnitClothOrder/KCCObody/KCCOitem/progress/mfrStatusText) 0-1
@mime	the mime type of the binary object - base type: normalizedString, (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCOheader/refDoc/attachment/binaryObject/@mime) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/binaryObject/@mime) [Optional]
mimeCode	mime type of the external object - base type: normalizedString, (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCOheader/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/externalReference/mimeCode) 0-1 Best Practice



minItemsPerPackage	<p>the minimum quantity of items for the specified kind of package.</p> <p>- base type: decimal, min inclusive: 0,  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/minItemsPerPackage) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/minItemsPerPackage) 0-1</p>
@minQty	<p>minimum product quantity</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/terms/allowanceCharge/@minQty) [Optional]  - nota: <i>minimum quantity of product for the application of this allowance or charge</i></p>
mnfrNote	<p>free text manufacturing note</p> <p>- base type: string, max length: 350,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/mnfrNote) 0-99</p>
mod	<p>model number of the garment</p> <p>- base type: string, max length: 15,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/mod) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/mod) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/mod) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/mod) 1-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/mod) 1-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/mod) 1-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/mod) 1-1</p> <p>- note: <i>when a garment component, it should be the code assigned to the garment article</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/mod) 1-1</p>
msgCurrency	<p>currency used to express the monetary amounts of the message</p> <p>- base type: string, cod. table: T9  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml</a>  (XPath KnitClothOrder/KCCOheader/msgCurrency) 0-1</p>
msgDate	<p>date of issue of the present message (xml document), according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string,  (XPath KnitClothOrder/KCCOheader/msgDate) 1-1</p>
@msgfunction	<p>function performed by the present message with regards to the transmission</p> <p>- base type: string, cod. table: NT18  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT18.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT18.xml</a>  (XPath KnitClothOrder/@msgfunction) [Optional] [Default= OR]</p>
msgID	<p>key identifier of the business document in the information system of the issuing Party. In case of more despatches of the same business document, it is unchanged.</p> <p>- base type: string, max length: 35,  (XPath KnitClothOrder/KCCOheader/msgID) 0-1</p>
msgN	<p>identification number given to the message (xml document) by its issuer. In case of more despatches of the same business document, it changes.</p> <p>- base type: string, max length: 35,  (XPath KnitClothOrder/KCCOheader/msgN) 1-1</p>
netWeight	<p>the net weight declared for transport or customs purpose</p> <p>- base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/terms/transInfo/netWeight) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/netWeight) 0-1</p>

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/netWeight) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/netWeight) 0-1</p>
notBeforeDate	<p>earliest date possible to begin an activity, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/notBeforeDate) 0-1</p>
note	<p>free text or structured (computer processing) note. For note structuring use the attributes "noteLabel" and "codelist"</p> <p>- base type: string, max length: 350,</p> <p>(XPath KnitClothOrder/KCCOheader/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/note) 0-99</p> <p>(XPath KnitClothOrder/terms/allowanceCharge/dtScheme/note) 0-99</p> <p>(XPath KnitClothOrder/garComInfo/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/note) 0-99</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/note) 0-99</p>
@noteLabel	<p>subject qualifier of a note</p> <p>- base type: string, max length: 35,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCOheader/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/garComInfo/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/terms/allowanceCharge/dtScheme/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/note/@noteLabel) [Optional]</p> <p>- nota: <i>must be used to qualify the subject of the note</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/</p>

	<p><b>acsComponent/note/@noteLabel) [Optional]</b>  - nota: <i>must be used to qualify the subject of the note</i></p>
<b>@numberingOrg</b>	<p>code specifying the organisation who has created or owns the coding or numbering system</p> <p>- base type: string, cod. table: NT6  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT6.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT6.xml</a>  (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/legalRef/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/lotN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/drop/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/garPack/garPackCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/@numberingOrg) [Optional] [Default= CL]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/artGroup/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeA/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/yarnCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/pattern/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/@n</p>

umberingOrg) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/yarnCode/color/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garSizeSet/garSizeTier/garSizeCode/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/size/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/season/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/color/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/mod/@numberingOrg) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/fabric/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/acsCode/art/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/refDoc/attachment/fileName/@numberingOrg) [Optional]  
(XPath KnitClothOrder/garComInfo/productLine/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/yarnCode/color/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/packages/  
handlingChar/garPack/garPackCode/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  
productLine/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garmentCode/garmentCodeB/@numberingOrg) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/note/@numberingOrg) [Optional]  
- nota: *must be used to specify the organization that created the list of codes used in "noteLabel"*

(XPath KnitClothOrder/KCCOheader/thirdParty/id/@numberingOrg) [Optional]  
(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  
csRange/garmentVariant/variantType/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/garComInfo/operationalCode/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/yarnCode/art/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
garConsumptionSet/acsCode/@numberingOrg) [Optional]  
(XPath KnitClothOrder/garComInfo/season/@numberingOrg) [Optional]  
- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCOheader/season/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/dyeN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/terms/allowanceCharge/dtScheme/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageModelCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantType/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/garComInfo/brand/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/id/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/size/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "</i></p>
--	--

	<p><i>noteLabel"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/brand/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeA/art/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/size/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/color/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/fileName/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/@numberingOrg) [Optional] - nota: <i>to be used for garSizeCode</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/added/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/dyeN/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/lotN/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/mod/@numberingOrg) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/operationalCode/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/size/@numberingOrg) [Optional] - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/drop/@numberingOrg) [Optional]</p>
--	---



	<p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType  /@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  EPClist/EPC/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentPartCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/fabric/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeA/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/artGroup/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/drop/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/garmentCode/garmentCodeB/size/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageN/@numberingOrg) [Optional]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumptionSet/garSizeCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/  itemsList/qualityLevel/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCOheader/subContractor/id/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  acsPack/acsPackCode/@numberingOrg) [Optional]</p>
--	---

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/size/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/added/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/fabric/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/note/@numberingOrg) [Optional]

- nota: *must be used to specify the organization that created the list of codes used in "noteLabel"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/progress/qualityLevel/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/progress/itemsList/itemIdentification/serialN/@numberingOrg) [Optional]

- nota: *here the issuer of the serial number must be specified (when different from the Supplier)*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/mod/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/pattern/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/artGroup/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/fabric/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/mod/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/legalRef/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/lotN/@numberingOrg) [Optional]

(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/fabric/@numberingOrg) [Optional]

- nota: *this attribute should be used either single or coupled with "listName" and "listVersion"*  
(XPath KnitClothOrder/KCCOheader/docID/@numberingOrg) [Optional]

- nota: *here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)*  
(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/



	<p>garConsumptionSet/garConsumption/garSizeCode/@numberingOrg) [Optional]</p> <p>]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/garConsumptionSet/dyeN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/garConsumptionSet/yarnCode/@numberingOrg) [Optional] [Default= CL]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/garConsumptionSet/yarnCode/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/garTecSheet/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/garConsumptionSet/garConsumption/@numberingOrg) [Optional]</p> <p>- nota: <i>to be used for garSizeCode</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/mod/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/garConsumptionSet/yarnCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/packages/handlingChar/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/garConsumptionSet/yarnCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/garTecSheet/garmentCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/size/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/mod/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/acsComponent/acsCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/garmentPartCode/mod/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/fileName/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/garTecSheet/garConsumptionSet/texCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/appMnfrOperation/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/</p>
--	---

	<p><b>csRange/sizeMatrix/sizeRow/drop/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  <b>garmentPartCode/color/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/lotN/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  <b>garmentPartComponent/garmentPartCode/color/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  <b>garmentPartCode/fabric/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  <b>garConsumptionSet/acsCode/added/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  <b>garmentPartComponent/garmentPartCode/fabric/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCOheader/note/@numberingOrg) [Optional]  - nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  <b>csRange/sizeMatrix/sizeRow/drop/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  <b>csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN/@numberingOrg) [Optional]</b>  - nota: <i>here the issuer of the serial number must be specified (when different from the Supplier)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  <b>csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@numberingOrg) [Optional]</b>  <b>]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  <b>csRange/@numberingOrg) [Optional]</b>  (XPath KnitClothOrder/garComInfo/note/@numberingOrg) [Optional]  - nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  <b>fabricComponent/refDoc/attachment/fileName/@numberingOrg) [Optional]</b>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  <b>csRange/color/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/note/@numberingOrg) [Optional]  - nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  <b>acsComponent/acsCode/pattern/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  <b>fabricComponent/note/@numberingOrg) [Optional]</b>  - nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  <b>handlingChar/acsPack/acsPackCode/@numberingOrg) [Optional]</b>  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/phaseCode/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p>
--	--

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/lotN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/drop/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/size/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/mod/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/garmentVariant/variantType/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/fabric/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/fileName/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantType/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/</p>
--	--

	<p style="text-align: center;"><b>garConsumptionSet/texCode/art/@numberingOrg) [Optional]</b></p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/packages/packageModelCode/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/garmentPartCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/note/@numberingOrg) [Optional]</p> <p>- nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/garmentPartCode/size/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/lotN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/dyeN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/size/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/additionalComponentCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/appMnfrOperation/refDoc/attachment/fileName/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/csRange/garmentVariant/variantCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/garTecSheet/garConsumptionSet/texCode/pattern/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/appMnfrOperation/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/packages/handlingChar/garPack/garPackCode/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/csRange/drop/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/attachment/fileName/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelComponent/garmentPartComponent/dyeN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantType/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObbody/KCCOitem/apparelProd/garmentCode/garmentCodeB/artGroup/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p>
--	--

	<p><i>rsion</i>"  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow/itemsList/qualityLevel/@numberingOrg) [Optional  ]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  EPClist/EPC/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/texCode/added/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN/@numberingOrg) [Optional]  - nota: <i>here the issuer of the serial number must be specified (when different from the Supplier)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/note/@numberingOrg) [Optional]  - nota: <i>must be used to specify the organization that created the list of codes used in "noteLabel"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN/@numberingOrg) [Optional]  - nota: <i>here the issuer of the serial number must be specified (when different from the Supplier)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/lotN/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  garConsumptionSet/texCode/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/serialN/@numberingOrg) [Optional]  - nota: <i>here the issuer of the serial number must be specified (when different from the Supplier)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/season/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/  csRange/sizeMatrix/sizeRow/size/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  garmentCode/garmentCodeB/size/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/refDoc/docID/@numberingOrg) [Optional]  - nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/acsCode/added/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/acsPack/acsPackCode/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath  KnitClothOrder/KCCOheader/buyer/additionalIdentifier/@numberingOrg) [Optional]  - nota: <i>here the issuer of the identifier must be specified</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/texCode/art/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  fabricComponent/texCode/@numberingOrg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/  csRange/garmentVariant/variantCode/@numberingOrg) [Optional]  - nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p>
--	---



	<p><i>rsion</i>"</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/fileName/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/drop/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCOheader/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/color/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/dyeN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCOheader/buyer/id/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/pattern/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/yarnCode/@numberingOrg) [Optional] [Default= CL]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/itemIdentification/serialN/@numberingOrg) [Optional]</p> <p>- nota: here the issuer of the serial number must be specified (when different from the Supplier)</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageN/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/garComInfo/garPack/garPackCode/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/additionalComponentCode/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/garComInfo/acsPack/acsPackCode/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/pattern/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/drop/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/season/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantCode/@numberingOrg) [Optional]</p> <p>- nota: this attribute should be used either single or coupled with "listName" and "listVersion"</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/additionalComponentCode/@numberingOrg) [Optional]</p>
--	--

	<p>ditional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/docID/@numberingOrg) [Optional]</p> <p>- nota: <i>here can be specified whose document numbering is used (e.g.: Client, Supplier, ..)</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeA/art/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/id/@numberingOrg) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/qualityLevel/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/added/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/color/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/drop/@numberingOrg) [Optional]</p> <p>- nota: <i>this attribute should be used either single or coupled with "listName" and "listVersion"</i></p>
operationalCode	<p>operational code: it is the code of a project, an event, an initiative, a sales channel, a management type (eg CITES), ... the document, or product, is connected with.</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/garComInfo/operationalCode) 0-19</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/operationalCode) 0-19</p>
package	<p>code specifying the type of transport package</p> <p>- base type: string, cod. table: T11</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T11.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T11.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/package) 1-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/package) 1-1</p>
@packageContainerN	<p>reference usable to indicate the outer package containing this package</p> <p>- base type: string, max length: 40,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageN/@packageContainerN) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageN/@packageContainerN) [Optional]</p>
@packageLevel	<p>level used to indicate the hierarchical structure of the packages (from outer to inner levels)</p> <p>- base type: positiveInteger, min inclusive: 1, max inclusive: 9,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/@packageLevel) [Optional]</p> <p>- nota: <i>number fixing the level of the package in the transport structure (from inner to outer). Must either be used for all package types or not be used</i></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/@packageLevel) [Optional]</p> <p>- nota: <i>number fixing the level of the package in the transport structure (from inner to outer). Must either be used for all package types or not be used</i></p>
packageModelCode	<p>a code (eg a barcode) identifying the type of packaging</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageModelCode) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageModelCode) 0-1</p>

packageN	<p>serial number used to identify a transport package</p> <p>- base type: string, max length: 40, (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageN) 0-unbounded</p> <p>- note: <i>here the serial no.s of the packages can be identified</i> (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageN) 0-unbounded</p> <p>- note: <i>here the serial no.s of the packages can be identified</i></p>
packageQty	<p>quantity of the specified transport packages</p> <p>- base type: positiveInteger, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageQty) 0-1</p> <p>- note: <i>total for the type of package</i> (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageQty) 0-1</p> <p>- note: <i>total for the type of package</i></p>
packageText	<p>denomination of the type of transport package (text)</p> <p>- base type: string, max length: 80, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageText) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageText) 1-1</p>
@part	<p>percent fraction</p> <p>- base type: decimal, min inclusive: 1, max inclusive: 100, fraction digits: 2, (XPath KnitClothOrder/terms/insPayment/@part) [Required]</p> <p>- nota: <i>here the % value of each installment must be indicated</i></p>
pattern	<p>pattern/design number of the product, when not included in the article code</p> <p>- base type: string, max length: 15, (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/acsCode/pattern) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/texCode/pattern) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/acsCode/pattern) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/acsCode/pattern) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/texCode/pattern) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/texCode/pattern) 0-1</p>
payMode	<p>way or means of payment</p> <p>- base type: string, cod. table: T2 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T2.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T2.xml</a> (XPath KnitClothOrder/terms/insPayment/payMode) 0-1 (XPath KnitClothOrder/terms/payment/payMode) 0-1</p>
payTerm	<p>code specifying the terms or time by which the payment must be done</p> <p>- base type: string, cod. table: T1 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T1.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T1.xml</a> (XPath KnitClothOrder/terms/insPayment/payTerm) 1-1 (XPath KnitClothOrder/terms/payment/payTerm) 1-1</p>
payTermText	<p>free text specifying the terms by which the payment must be done (time/mode or means)</p> <p>- base type: string, max length: 250, (XPath KnitClothOrder/terms/insPayment/payTermText) 1-1 (XPath KnitClothOrder/terms/payment/payTermText) 1-1</p>
pcQty	<p>percent quantity of a raw material or of a specified component in a fabric or in a yarn</p> <p>- base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2, (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/pcQty) 0-1</p> <p>- note: <i>percentage of the component in the end product</i></p>
percCompos	<p>fiber percentage in the product composition</p> <p>- base type: decimal, min inclusive: 0, max inclusive: 100, fraction digits: 2, (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos) 1-9</p> <p>- note: <i>fiber % in the product composition</i></p>
@percSourcesRenewable	<p>indicates the percentage of renewable sources</p> <p>- base type: decimal,</p>



	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos/@percSourcesRenewable) [Optional]  - nota: use only for virgin material</p>
person	<p>name of a person (e.g. contact person within an organization)  - base type: string, max length: 40,  (XPath KnitClothOrder/KCCOheader/subContractor/person) 0-1  (XPath KnitClothOrder/KCCOheader/thirdParty/person) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/person) 0-1  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/person) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/person) 0-1  (XPath KnitClothOrder/terms/trade/tradeLocation/person) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/person) 0-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/person) 0-1</p>
phaseCode	<p>Code that identifies a production phase of a fashion product.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/phaseCode) 1-1</p>
@phone	<p>phone number of the contact person within a Party  - base type: string, max length: 35,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/person/@phone) [Optional]  (XPath KnitClothOrder/terms/transInfo/despatchLocation/person/@phone) [Optional]  (XPath KnitClothOrder/KCCOheader/thirdParty/person/@phone) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/person/@phone) [Optional]  (XPath KnitClothOrder/KCCOheader/buyer/person/@phone) [Optional]  (XPath KnitClothOrder/KCCOheader/subContractor/person/@phone) [Optional]  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/person/@phone) [Optional]  (XPath KnitClothOrder/terms/trade/tradeLocation/person/@phone) [Optional]</p>
pieceInnWrap1	<p>code specifying the type of inner wrapping/packing used for the fabric piece  - base type: string, cod. table: T4  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T4.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T4.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/piecePack/pieceInnWrap1) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/piecePack/pieceInnWrap1) 1-1  (XPath KnitClothOrder/garComInfo/piecePack/pieceInnWrap1) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/piecePack/pieceInnWrap1) 1-1</p>
pieceInnWrap2	<p>code sub-specifying the type of inner wrapping/packing used for the fabric piece  - base type: string, cod. table: T5  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T5.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T5.xml</a>  (XPath KnitClothOrder/garComInfo/piecePack/pieceInnWrap2) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/piecePack/pieceInnWrap2) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/piecePack/pieceInnWrap2) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/piecePack/pieceInnWrap2) 0-1</p>
pieceOutWrap	<p>code specifying the type of outer wrapping or packing used for the fabric piece  - base type: string, cod. table: T6  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T6.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T6.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/piecePack/pieceOutWrap) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/piecePack/pieceOutWrap) 0-1  (XPath KnitClothOrder/garComInfo/piecePack/pieceOutWrap) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/piecePack/pieceOutWrap) 0-1</p>
piecePackText	<p>free text specifying the type of wrapping or packing used for the fabric piece  - base type: string, max length: 250,  (XPath KnitClothOrder/garComInfo/piecePack/piecePackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/piecePack/piecePackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/piecePack/piecePackText) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/</p>

	handlingChar/piecePack/piecePackText) 1-1
postCode	code defining the postal zone - base type: string, max length: 10, (XPath KnitClothOrder/terms/trade/tradeLocation/postCode) 0-1 (XPath KnitClothOrder/KCCOheader/thirdParty/postCode) 0-1 (XPath KnitClothOrder/terms/transInfo/deliveryLocation/postCode) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/postCode) 0-1 (XPath KnitClothOrder/KCCOheader/subContractor/postCode) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/postCode) 0-1 (XPath KnitClothOrder/terms/transInfo/despatchLocation/postCode) 0-1 (XPath KnitClothOrder/KCCOheader/buyer/postCode) 0-1
price	unit price of the article, object or service specified - base type: decimal, min inclusive: 0, fraction digits: 4, (XPath KnitClothOrder/KCCObody/KCCOitem/price) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/price) 0-1
@priceQualifier	type of price with reference to discount and taxes - base type: string, cod. table: NT20 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT20.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT20.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/price/@priceQualifier) [Optional] [Default= NET] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/price/@priceQualifier) [Optional] [Default= NET]
priority	the priority of this row. - base type: string, (XPath KnitClothOrder/KCCObody/KCCOitem/priority) 0-1
@productLevel	level of the product (end or intermediate) yielded by an operation in a work cycle - base type: string, cod. table: NT22 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT22.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT22.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/@productLevel) [Optional] [Default= END] - nota: the qualifier "intermediate" must be used when the product is also a component in an other line of the same Commission Order
productLine	the product line name of a fashion product. - base type: string, (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/productLine) 0-1 (XPath KnitClothOrder/garComInfo/productLine) 0-1
@progr	progressive number in the sequence - base type: positiveInteger, min inclusive: 1, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/@progr) [Required] (XPath KnitClothOrder/KCCObody/KCCOitem/packages/fillingCriterion/@progr) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/fillingCriterion/@progr) [Optional] (XPath KnitClothOrder/terms/transInfo/@progr) [Optional] - nota: Indicates the position of the leg in a sequence of transport legs. If it is declared it must be in all the transInfo elements.
project	code used to assign the items ordered (fabric pieces, accessories, garments...) to a specific project of the Client - base type: string, max length: 40, (XPath KnitClothOrder/garComInfo/project) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/project) 0-1
@propulsionSystemCode	propulsion system type - base type: string, cod. table: NT324 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT324.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT324.xml</a> (XPath KnitClothOrder/terms/transInfo/transMeans/@propulsionSystemCode) [Optional] - nota: indicates the type of propulsion of the means of transport
qty	net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/qty) 0-2 Best Practice - note: Total quantity produced by this phase. (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/qty) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/qty) 1-2 Best Practice - note: quantity to be consumed in the manufacturing operation (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/qty) 0-1

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/qty) 1-2 Best Practice</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/qty) 1-1</p> <p>- note: here is the provisional consumption</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/progress/qty) 1-2 Best Practice</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/qty) 1-2 Best Practice</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/qty) 1-2 Best Practice</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/qty) 1-3</p> <p>- note: quantity to be consumed in the transformation. This element can have more instances only if the units of measure are different</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/qty) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/qty) 1-1</p> <p>- note: here is the provisional consumption</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/qty) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/qty) 0-1</p>
qtyVariance	<p>difference between two quantities qualified by the context (e.g.: delivered vs. ordered; received vs. despatched etc..)</p> <p>- base type: decimal, fraction digits: 2,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/qtyVariance) 0-1</p> <p>- note: here is the difference between provisional and effective consumption</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/qtyVariance) 0-1</p> <p>- note: here is the difference between provisional and effective consumption</p>
qualityLevel	<p>the product quality level (first choice, second choice,...).</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/qualityLevel) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/progress/itemsList/qualityLevel) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/progress/qualityLevel) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/itemsList/qualityLevel) 0-1</p>
@recyclingProcessEfficiency	<p>recycling process efficiency rate (percentage by weight).</p> <p>- base type: decimal, min inclusive: 0, max inclusive: 100,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos/@recyclingProcessEfficiency) [Optional]</p> <p>- nota: process efficiency declared by the fibre supplier</p>
@recyclingProcessMethod	<p>recycling process method</p> <p>- base type: string, cod. table: T307</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T307.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T307.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos/@recyclingProcessMethod) [Optional]</p> <p>- nota: use only for non virgin material</p>
@reelMat	<p>type of material of which a package for yarn is made</p> <p>- base type: string, cod. table: T30</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T30.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T30.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/@reelMat) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/@reelMat) [Optional]</p> <p>(XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/@reelMat) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/@reelMat) [Optional]</p>

@reelType	<p>type of package used for a yarn product  - base type: string, cod. table: T29  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T29.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T29.xml</a>  (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/@reelType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/@reelType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/@reelType) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/@reelType) [Required]</p>
@role	<p>Third Party role qualifier  - base type: string, cod. table: NT2  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT2.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT2.xml</a>  (XPath KnitClothOrder/KCCOheader/thirdParty/@role) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/@role) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/@role) [Required]</p>
routeLength	<p>length of a route  - base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/terms/transInfo/routeLength) 0-1</p>
@schemeID	<p>identifier of an identification scheme  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/customsStat/@schemeID) [Optional] [Default= TARIC]  - nota: By default the value is TARIC, other different coding schemes must be indicated  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/hashFootprint/@schemeID) [Optional]  - nota: specify for which system this hash footprint might be used as identifier (for example HDFS system..)</p>
season	<p>sale season; defined as: season (1 crt) + year (4 crt) - season: S/S=1 A/W=2 Spring=3 Summer=4 Autumn=5 Winter=6: for more than four seasons use alphabetic sequence: 1st season=A 2nd season=B etc.etc.  - base type: string, max length: 15,  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/season) 0-1  - note: Preferably do not use this element here if season is declared in the header.  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/season) 0-1  - note: here indicates the season to which the referenced document belongs</p>

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/season) 0-1</p> <ul style="list-style-type: none"> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/season) 0-1</li> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/season) 0-1</li> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/season) 0-1</li> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/KCCOheader/refDoc/season) 0-1</li> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/season) 0-1</li> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/garComInfo/season) 0-1</li> <li>- note: Preferably do not use this element here if season is declared in the header. (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/season) 0-1</li> <li>- note: here indicates the season to which the referenced document belongs (XPath KnitClothOrder/KCCOheader/season) 0-1</li> </ul>
@sender	<p>qualifier that specifies the Party issuing of the document</p> <ul style="list-style-type: none"> <li>- base type: boolean,</li> <li>(XPath KnitClothOrder/KCCOheader/buyer/@sender) [Optional]</li> <li>- nota: This attribute is mandatory when the STYLESHEET must be used (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/@sender) [Optional]</li> <li>- nota: This attribute is mandatory when the STYLESHEET must be used (XPath KnitClothOrder/KCCOheader/subContractor/@sender) [Optional]</li> <li>- nota: This attribute is mandatory when the STYLESHEET must be used (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/@sender) [Optional]</li> <li>- nota: This attribute is mandatory when the STYLESHEET must be used (XPath KnitClothOrder/KCCOheader/thirdParty/@sender) [Optional]</li> <li>- nota: This attribute is mandatory when the STYLESHEET must be used</li> </ul>
serialN	<p>serial number used for the identification of a physical unit</p> <ul style="list-style-type: none"> <li>- base type: string, max length: 250,</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN) 1-9 Best Practice</li> <li>- note: multiple values of serialN are allowed for different representations of the serial identifier of the same product unit. Instances of serialN must differ at least for one value of numberingOrg and idQualifier.</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/itemsList/itemIdentification/serialN) 1-9 Best Practice</li> <li>- note: multiple values of serialN are allowed for different representations of the serial identifier of the same product unit. Instances of serialN must differ at least for one value of numberingOrg and idQualifier.</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN) 1-9 Best Practice</li> <li>- note: multiple values of serialN are allowed for different representations of the serial identifier of the same product unit. Instances of serialN must differ at least for one value of numberingOrg and idQualifier.</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/progress/itemsList/itemIdentification/serialN) 1-9 Best Practice</li> <li>- note: multiple values of serialN are allowed for different representations of the serial identifier of the same product unit. Instances of serialN must differ at least for one value of numberingOrg and idQualifier.</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/serialN) 0-unbounded</li> <li>- note: it may be used to identify the pieces/chains that the Subcontractor must use for the commissioned work</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN) 1-9 Best Practice</li> <li>- note: multiple values of serialN are allowed for different representations of the serial identifier of the same product unit. Instances of serialN must differ at least for one value of numberingOrg and idQualifier.</li> </ul>
size	<p>size number of a fashion product (knitwear, clothing, ..)</p> <ul style="list-style-type: none"> <li>- base type: string, max length: 15,</li> <li>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/sizeMatrix/sizeRow/size) 1-1</li> </ul>

	<p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentPartCode/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/sizeMatrix/sizeRow/size) 1-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/garmentPartCode/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentPartCode/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentPartCode/size) 0-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/size) 1-1</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/size) 0-1</p>
sizeEnd	<p>first size of a range of sizes</p> <p>- base type: string, max length: 15,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/garSizeTier/sizeEnd) 0-1</p>
sizeStart	<p>first size of a range of sizes</p> <p>- base type: string, max length: 15,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/garSizeTier/sizeStart) 1-1</p>
@sizeSystemBase	<p>base of the size system</p> <p>- base type: string, cod. table: T423</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T423.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T423.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/@sizeSystemBase) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/@sizeSystemBase) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/@sizeSystemBase) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/@sizeSystemBase) [Optional]</p>
@sizeSystemID	<p>the identifier of the size system.</p> <p>- base type: string,</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/@sizeSystemID) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/@sizeSystemID) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/@sizeSystemID) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/@sizeSystemID) [Optional]</p>
@sizeSystemNat	<p>nation or agency identifying the size system</p> <p>- base type: string, cod. table: T421</p> <p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T421.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T421.xml</a></p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/@sizeSystemNat) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/@sizeSystemNat) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/@sizeSystemNat) [Optional]</p> <p>(XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/@sizeSystemNat) [Optional]</p>
@sizeSystemSeg	<p>market segment identifying the size system</p> <p>- base type: string, cod. table: T422</p>



	<p><a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T422.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T422.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/@sizeSystemSeg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garSizeSet/@sizeSystemSeg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/@sizeSystemSeg) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/@sizeSystemSeg) [Optional]</p>
sortableIndicator	<p>It states if the item can be automatically sorted.  - base type: boolean,  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/sortableIndicator) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/sortableIndicator) 0-1</p>
@source	<p>party who has provided the data  - base type: string, cod. table: NT12  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT12.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT12.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/specValue/@source) [Optional]</p>
specDate	<p>date by which the referenced blanket order must receive full product specifications (e.g.: colour), according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYY-WW.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/specDate) 0-1  (XPath KnitClothOrder/garComInfo/specDate) 0-1</p>
specValue	<p>value requested for a property or a parameter that is measured  - base type: decimal,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/specValue) 1-1</p>
stackabilityLevel	<p>This value indicates the level at which the item can be stacked.  - base type: integer,  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/stackabilityLevel) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/stackabilityLevel) 0-1</p>
statusReason	<p>the reason for the indicated status.  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/statusReason) 0-1</p>
street	<p>street and building number identifying a location  - base type: string, max length: 80,  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/street) 0-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/street) 0-1  (XPath KnitClothOrder/KCCOheader/subContractor/street) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/street) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/street) 0-1  (XPath KnitClothOrder/KCCOheader/thirdParty/street) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/street) 0-1  (XPath KnitClothOrder/terms/trade/tradeLocation/street) 0-1</p>
subCountry	<p>short name or code of the sub-country entity  - base type: string, max length: 9,  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/subCountry) 0-1  (XPath KnitClothOrder/KCCOheader/subContractor/subCountry) 0-1  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/subCountry) 0-1  (XPath KnitClothOrder/terms/trade/tradeLocation/subCountry) 0-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/subCountry) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/subCountry) 0-1  (XPath KnitClothOrder/KCCOheader/thirdParty/subCountry) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/subCountry) 0-1</p>
subDept	<p>name or code of a department  - base type: string, max length: 40,  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/subDept) 0-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/subDept) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/subDept) 0-1  (XPath KnitClothOrder/KCCOheader/buyer/subDept) 0-1</p>

	(XPath KnitClothOrder/KCCOheader/subContractor/subDept) 0-1 (XPath KnitClothOrder/terms/trade/tradeLocation/subDept) 0-1 (XPath KnitClothOrder/KCCOheader/thirdParty/subDept) 0-1 (XPath KnitClothOrder/terms/transInfo/deliveryLocation/subDept) 0-1
@subject	qualifier of the product treated in the note - base type: string, cod. table: NT40 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT40.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT40.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ mnfrNote/@subject) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/image/@subject) [Optional]
taxCategory	duty or tax or fee category - base type: string, cod. table: T62 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T62.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T62.xml</a> (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/taxCategory) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/taxCategory) 0-1
taxRate	duty or tax or fee percent rate - base type: string, (XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/taxRate) 0-1 (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/taxRate) 0-1
@taxType	duty or tax or fee type - base type: string, cod. table: T61 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T61.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T61.xml</a> (XPath KnitClothOrder/terms/allowanceCharge/dtScheme/@taxType) [Required] (XPath KnitClothOrder/KCCObody/KCCOitem/dtScheme/@taxType) [Required]
@TID	serial number wired into the RFID chip - base type: string, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/ EPClist/EPC/@TID) [Optional] (XPath KnitClothOrder/KCCObody/KCCOitem/packages/ EPClist/EPC/@TID) [Optional]
transactionReceipt	transaction receipt on blockchain - base type: string, max length: 80, (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/ refDoc/attachment/blockChainReference/transactionReceipt) 1-9 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ yarnComponent/refDoc/attachment/blockChainReference/transactionReceipt) 1-9 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/ attachment/blockChainReference/transactionReceipt) 1-9 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ fabricComponent/refDoc/attachment/blockChainReference/transactionReceipt) 1-9 (XPath KnitClothOrder/KCCOheader/refDoc/attachment/ blockChainReference/transactionReceipt) 1-9 (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/ refDoc/attachment/blockChainReference/transactionReceipt) 1-9 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ garmentPartComponent/refDoc/attachment/blockChainReference/transactionR eceipt) 1-9 (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/ acsComponent/refDoc/attachment/blockChainReference/transactionReceipt) 1 -9
transCondition	special condition of transport or special service requested to the Forwarder - base type: string, cod. table: T38 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T38.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T38.xml</a> (XPath KnitClothOrder/terms/transInfo/transCondition) 0-3
transConditionText	free text description of the special condition of transport or special service requested to the Forwarder - base type: string, max length: 250, (XPath KnitClothOrder/terms/transInfo/transConditionText) 0-1
transMeans	means of transport, in general or referred to a specific leg - base type: string, cod. table: T40 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T40.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T40.xml</a> (XPath KnitClothOrder/terms/transInfo/transMeans) 0-1



transMode	<p>way of transport, in general or referred to the specified leg  - base type: string, cod. table: T8  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T8.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T8.xml</a>  (XPath KnitClothOrder/terms/transInfo/transMode) 1-1</p>
@transReason	<p>reason for the transport  - base type: string, cod. table: NT11  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT11.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT11.xml</a>  (XPath KnitClothOrder/terms/transInfo/@transReason) [Optional]</p>
@uid	<p>unique element identifier within the xml document  - base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/@uid) [Optional]  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/@uid) [Optional]</p>
@um	<p>specification of the unit of measure  - base type: string, cod. table: NT7  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT7.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT7.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/qtyVariance/@um) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnReelH/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageDim/length/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnReelQty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/sizeMatrix/sizeRow/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/yarnReelH/@um) [Required]  (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/yarnReelH/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/minItemsPerPackage/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/itemsPerPackage/@um) [Required]  (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/yarnReelQty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/minItemsPerPackage/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageDim/height/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageDim/width/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garMeaSet/garMea/specValue/@um) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageDim/length/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnReelID/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/yarnReelID/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/</p>

	<p>csRange/sizeMatrix/sizeRow/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  packageDim/height/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  packageDim/width/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  acsComponent/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  garmentPartComponent/qty/@um) [Required]  (XPath KnitClothOrder/terms/transInfo/despatchLocation/  geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/terms/transInfo/routeLength/@um) [Required]  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/  geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/KCCOheader/subContractor/  geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/terms/allowanceCharge/@um) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/  geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  handlingChar/grossWeight/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/volume/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/pcQty/@um) [Optional]  - nota: <i>to be used when it has to be soecified if the declared percentage is by weight, v  olume, etc...</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  handlingChar/netWeight/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/  handlingChar/volume/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  yarnPack/yarnReel/yarnReelQty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  yarnPack/yarnReel/yarnReelID/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/  yarnPack/yarnReel/yarnReelH/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  yarnComponent/qty/@um) [Required]  (XPath KnitClothOrder/terms/transInfo/netWeight/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  grossWeight/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  netWeight/@um) [Required]  (XPath KnitClothOrder/terms/transInfo/grossWeight/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/grossWeight/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/price/@um) [Optional]  - nota: <i>Unit of measure of the product to which the price is referred (price per meter)</i>  (XPath KnitClothOrder/terms/trade/tradeLocation/  geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsum  ption/qty/@um) [Required]  (XPath  KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsum  ption/qtyVariance/@um) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/progress/qty/@um) [Required]  (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/  yarnReelID/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/  csRange/sizeMatrix/sizeRow/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/  handlingChar/yarnPack/yarnReel/yarnReelQty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/price/@um) [Optional]  - nota: <i>Unit of measure of the product to which the price is referred (price per meter)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/</p>
--	--

	<p>fabricComponent/qty/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/netWeight/@um) [Required]  (XPath KnitClothOrder/KCCOheader/buyer/geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/KCCOheader/thirdParty/geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/geoCoordinates/@um) [Optional] [Default= DEGD]  - nota: <i>when not specified assume decimal DEGREES</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/itemsPerPackage/@um) [Required]  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/qty/@um) [Required]</p>
uri	<p>Uniform Resource Identifier (URI) that identifies the external object as an Internet resource  - base type: normalizedString,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/fabricComponent/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCOheader/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/acsComponent/refDoc/attachment/externalReference/uri) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/garmentPartComponent/refDoc/attachment/blockChainReference/uri) 1-1  - note: <i>reference to the used blockchain ( example: url https://etherscan.io/ of ethereum)</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/refDoc/attachment/externalReference/uri) 1-1</p>
@useProfile	<p>use profile to which the present document is compliant if it was agreed by the parties. It is suggested a URI with reference to the firms or the URL of the profile.  - base type: string,</p>

	(XPath KnitClothOrder/@useProfile) [Optional]
@validationMethod	<p>type of method used to validate the quantity to which it refers. For example, it indicates whether it was measured in the field, estimated indirectly, approved by an expert or taken from the literature</p> <p>- base type: string, cod. table: NT329  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT329.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT329.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/fabricCompos/percCompos/@validationMethod) [Optional]</p>
validityEnd	<p>date by which the validity ends, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string,  (XPath KnitClothOrder/KCCOheader/validityEnd) 0-1</p>
validityStart	<p>date by which the validity starts, according to one of the patterns YYYY-MM-DD, YYYY-MM-DD:HH-MM or YYYY-WW.</p> <p>- base type: string,  (XPath KnitClothOrder/KCCOheader/validityStart) 0-1</p>
variantCode	<p>Code of variant used for fashion product.</p> <p>- base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant/variantCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/garmentVariant/variantCode) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantCode) 1-1</p>
variantType	<p>Type of variant used for fashion product (examples: 'treatment', 'washing type', 'size class',...)</p> <p>- base type: string,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/endUseGroup/csRange/garmentVariant/variantType) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garmentCode/garmentCodeB/garmentVariant/variantType) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/garmentCode/garmentCodeB/garmentVariant/variantType) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garmentCode/garmentCodeB/garmentVariant/variantType) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelProd/csRange/garmentVariant/variantType) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/csRange/garmentVariant/variantType) 1-1</p>
@varReason	<p>reason for the difference between the two quantities specified by the context</p> <p>- base type: string, cod. table: T46  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T46.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T46.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/garConsumptionSet/garConsumption/qtyVariance/@varReason) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/garTecSheet/garConsumptionSet/garConsumption/qtyVariance/@varReason) [Optional]</p>
@VAT	<p>VAT rate or code (DEPRECATED, use dtScheme element)</p> <p>- base type: string, cod. table: NT16  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT16.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT16.xml</a>  (XPath KnitClothOrder/terms/allowanceCharge/@VAT) [Optional]</p>

	<p>(XPath KnitClothOrder/KCCOheader/thirdParty/@VAT) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/lineN/@VAT) [Optional]  - nota: <i>Deprecated, prefer dtScheme when available.</i>  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/@VAT) [Optional]  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/@VAT) [Optional]</p>
@version	<p>Dictionary version from which the instance has been created  - base type: string, cod. table: NT100  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT100.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT100.xml</a>  (XPath KnitClothOrder/@version) [Optional] [Default= draft]</p>
volume	<p>effective volume of a specified object  - base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/volume) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/volume) 0-1</p>
warpLetter	<p>letter that indicates a specific yarn in the warping formula (diagram)  - base type: string, length: 1,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/warpLetter) 0-1  - note: <i>to be used only in the Warping order</i></p>
weftLetter	<p>letter that indicates a specific yarn in the wefting formula (diagram)  - base type: string, length: 1,  (XPath KnitClothOrder/KCCObody/KCCOitem/apparelComponent/yarnComponent/weftLetter) 0-1  - note: <i>to be used only in the Weaving order</i></p>
width	<p>effective width of a specified object  - base type: decimal, min inclusive: 0, fraction digits: 2,  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/packageDim/width) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/packageDim/width) 0-1</p>
xGeoCoord	<p>geographical coordinate x , corresponding to latitude  - base type: decimal,  (XPath KnitClothOrder/KCCOheader/subContractor/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/KCCOheader/thirdParty/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/terms/transInfo/deliveryLocation/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/terms/trade/tradeLocation/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/terms/transInfo/despatchLocation/geoCoordinates/xGeoCoord) 1-1  (XPath KnitClothOrder/KCCOheader/buyer/geoCoordinates/xGeoCoord) 1-1</p>
yarnConeAngle	<p>tapering angle of the cone on which a yarn is reeled  - base type: positiveInteger,  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/yarnConeAngle) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/yarnConeAngle) 0-1  (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/yarnConeAngle) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnConeAngle) 0-1</p>
yarnOutWrap	<p>code specifying the type of outer wrapping or packing of a yarn  - base type: string, cod. table: T33  <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T33.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T33.xml</a>  (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnOutWrap) 0-1  (XPath KnitClothOrder/garComInfo/yarnPack/yarnOutWrap) 0-1  (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnOutWrap) 0-1</p>

	(XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnOutWrap) 0-1
yarnOutWrapText	free text specifying the type of outer wrapping or packing of a yarn - base type: string, max length: 250, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnOutWrapText) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnOutWrapText) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnOutWrapText) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnOutWrapText) 0-1
yarnReelID	diameter of the bobbin used for a yarn product - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/yarnReelID) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnReelID) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/yarnReelID) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/yarnReelID) 0-1
yarnReelH	height of the bobbin used a yarn product - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnReelH) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/yarnReelH) 0-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/yarnReelH) 0-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/yarnReelH) 0-1
yarnReelQty	quantity of yarn (by weight or length) wound upon a bobbin - base type: decimal, min inclusive: 0, fraction digits: 2, (XPath KnitClothOrder/garComInfo/yarnPack/yarnReel/yarnReelQty) 0-2 (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnReel/yarnReelQty) 0-2 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnReel/yarnReelQty) 0-2 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnReel/yarnReelQty) 0-2
yarnReelWrap	type of wrapping in which a package of yarn is wrapped - base type: string, cod. table: T32 <a href="http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T32.xml">http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T32.xml</a> (XPath KnitClothOrder/KCCObody/KCCOitem/garComInfo/yarnPack/yarnInWrap/yarnReelWrap) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/packages/handlingChar/yarnPack/yarnInWrap/yarnReelWrap) 1-1 (XPath KnitClothOrder/garComInfo/yarnPack/yarnInWrap/yarnReelWrap) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/packages/handlingChar/yarnPack/yarnInWrap/yarnReelWrap) 1-1
yGeoCoord	geographical coordinate y , corresponding to longitude - base type: decimal, (XPath KnitClothOrder/KCCOheader/thirdParty/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/terms/trade/tradeLocation/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/KCCOheader/subContractor/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/terms/transInfo/despatchLocation/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/KCCOheader/buyer/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/geoCoordinates/yGeoCoord) 1-1 (XPath KnitClothOrder/terms/transInfo/deliveryLocation/geoCoordinates/yGeoCoord) 1-1
zGeoCoord	geographical coordinate z , corresponding to altitude

	<ul style="list-style-type: none"> <li>- base type: decimal, (XPath KnitClothOrder/KCCObody/KCCOitem/phase/thirdParty/ geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/KCCOheader/thirdParty/geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/KCCObody/KCCOitem/thirdParty/ geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/KCCOheader/subContractor/ geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/terms/transInfo/deliveryLocation/ geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/terms/trade/tradeLocation/ geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/KCCOheader/buyer/geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i> (XPath KnitClothOrder/terms/transInfo/despatchLocation/ geoCoordinates/zGeoCoord) 0-1</li> <li>- note: <i>altitude might be omitted</i></li> </ul>
--	---



## 2.3 Suggested best practices

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
fabricComponent/refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCOheader/refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
garmentPartComponent/refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  
refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
refDoc/docID (identification number of the referenced document)**

numberingOrg indicates the role that produced the document identifier (it is allowed to declare two different ones -e.g. customer and supplier - with two docID with different numberingOrg

**KnitClothOrder/KCCObody/KCCOitem/appMnfrOperation/  
refDoc/attachment/externalReference/mimeType (mime type of the external object)**

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCOheader/refDoc/attachment/  
externalReference/mimeType (mime type of the external object)**

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCObody/KCCOitem/phase/refDoc/  
attachment/externalReference/mimeType (mime type of the external object)**

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>



**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/refDoc/attachment/externalReference/mimeType** (mime type of the external object)

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
fabricComponent/refDoc/attachment/externalReference/mimeType** (mime type of the external object)

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCObody/KCCOitem/garTecSheet/  
refDoc/attachment/externalReference/mimeType** (mime type of the external object)

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
garmentPartComponent/refDoc/attachment/externalReference/mimeType** (mime type of the external object)

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/refDoc/attachment/externalReference/mimeType** (mime type of the external object)

Use coding from IANA <http://www.iana.org/assignments/media-types/media-types.xml>

**KnitClothOrder/KCCObody/KCCOitem/phase/qty** (net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context)

this element can have two instances only if the units of measure are different

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
yarnComponent/qty** (net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context)

this element can have two instances only if the units of measure are different

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
garmentPartComponent/qty** (net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context)

this element can have two instances only if the units of measure are different

**KnitClothOrder/KCCObody/KCCOitem/progress/qty** (net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context)

this element can have two instances only if the units of measure are different

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/  
acsComponent/qty** (net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context)

this element can have two instances only if the units of measure are different

**KnitClothOrder/KCCObody/KCCOitem/apparelProd/qty** (net quantity of the article or object correlated, qualified by the function of the document (ordering, delivering, ..) and by the context)

this element can have two instances only if the units of measure are different

**KnitClothOrder/KCCObody/KCCOitem/apparelProd/  
csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN** (serial number used for the identification)

of a physical unit)

in the case of garment with RFID for anti-counterfeiting, RFID EPCGlobal for logistics and NFC for the customer experience there should be three serial elements with pairs of attributes numberingOrg/idQualifier: "CL"/"RFID", "GS1"/"RFID", "CL"/"NFC".

**KnitClothOrder/KCCObody/KCCOitem/apparelComponent/**

**fabricComponent/itemsList/itemIdentification/serialN (serial number used for the identification of a physical unit)**

in the case of garment with RFID for anti-counterfeiting, RFID EPCGlobal for logistics and NFC for the customer experience there should be three serial elements with pairs of attributes numberingOrg/idQualifier: "CL"/"RFID", "GS1"/"RFID", "CL"/"NFC".

**KnitClothOrder/KCCObody/KCCOitem/endUseGroup/**

**csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN (serial number used for the identification of a physical unit)**

in the case of garment with RFID for anti-counterfeiting, RFID EPCGlobal for logistics and NFC for the customer experience there should be three serial elements with pairs of attributes numberingOrg/idQualifier: "CL"/"RFID", "GS1"/"RFID", "CL"/"NFC".

**KnitClothOrder/KCCObody/KCCOitem/progress/**

**itemsList/itemIdentification/serialN (serial number used for the identification of a physical unit)**

in the case of garment with RFID for anti-counterfeiting, RFID EPCGlobal for logistics and NFC for the customer experience there should be three serial elements with pairs of attributes numberingOrg/idQualifier: "CL"/"RFID", "GS1"/"RFID", "CL"/"NFC".

**KnitClothOrder/KCCObody/KCCOitem/phase/lotDetails/**

**csRange/sizeMatrix/sizeRow/itemsList/itemIdentification/serialN (serial number used for the identification of a physical unit)**

in the case of garment with RFID for anti-counterfeiting, RFID EPCGlobal for logistics and NFC for the customer experience there should be three serial elements with pairs of attributes numberingOrg/idQualifier: "CL"/"RFID", "GS1"/"RFID", "CL"/"NFC".

## 2.4 Enumeration tables

List of enumeration tables used in the XML document. You can find all the tables with the corresponding codes at:  
<http://www.ebiz.enea.it/eBIZ/imple/eBIZTCU-draft.asp?lingua=en&pag=6>

NT1 - Order type  
NT100 - eBIZ TCFUpstream version  
NT11 - transport causal  
NT12 - data source  
NT16 - VAT rate or code  
NT18 - message function  
NT2 - third party qualifier  
NT20 - price qualifier  
NT22 - product type of an operation  
NT29 - format of a date  
NT3 - issuer of the identifier (or identification system) of a location.  
NT324 - propulsion system type  
NT329 - type of validation method of the value  
NT333 - type of hashing algorithm  
NT37 - committed quantity qualifier  
NT39 - consumption type  
NT4 - end use  
NT40 - manufacturing note qualifiers  
NT41 - garment attributes  
NT43 - operational code qualifier  
NT51 - Filling Criterion for Package homogeneity  
NT6 - coding system owner/issuer  
NT60 - language, codes from ISO 639-1 (subset)  
NT7 - unit of measure  
T1 - terms of payment  
T10 - ISO3166 - Country  
T11 - transport package type  
T19 - fibre type  
T2 - Modes of payment  
T205 - type of job in knitting/clothing  
T21 - type of document  
T265 - type of job technology in knitting/clothing  
T275 - type of machine for knitting/clothing  
T29 - type of yarn package  
T3 - terms of delivery - IncoTerms  
T30 - support of yarn package - material  
T306 - material circularity attribute  
T307 - recycling process method  
T32 - yarn reel wrapping type  
T33 - yarn outer packing  
T38 - transport conditions  
T4 - fabric piece inner packing (wrapping) 1  
T40 - type of transport means  
T41 - type of Allowance or Charge  
T421 - size system: nationality  
T422 - size system: market segment  
T423 - size system: base  
T44 - additional code type  
T46 - quantity variance reason  
T48 - garment part type  
T5 - fabric piece inner packing (wrapping) 2  
T6 - fabric piece outer packing  
T61 - duty or tax or fee type  
T62 - duty or tax or fee category  
T7 - manufacturing status  
T8 - Modes of Transport  
T9 - ISO4217 - Currency

(the most relevant tables are detailed in the following Annexes too)

## ACKNOWLEDGEMENT



This action is part of the TRICK project, which has received funding from Horizon 2020 research and innovation programme under grant agreement No. 958352 of the European Union.




## DISCLAIMER




The content of this document represents the views of the authors only and is their sole responsibility; it cannot be considered to reflect the views of the European Commission or any other body of the European Union.





The European Commission does not accept any responsibility for use that may be made of the information it contains.

# Annex A


Representative images of the principal complex elements' structure.

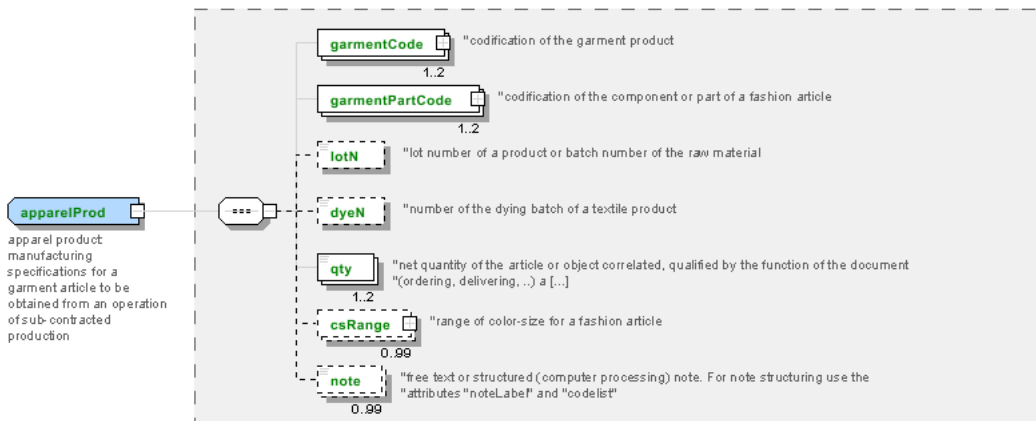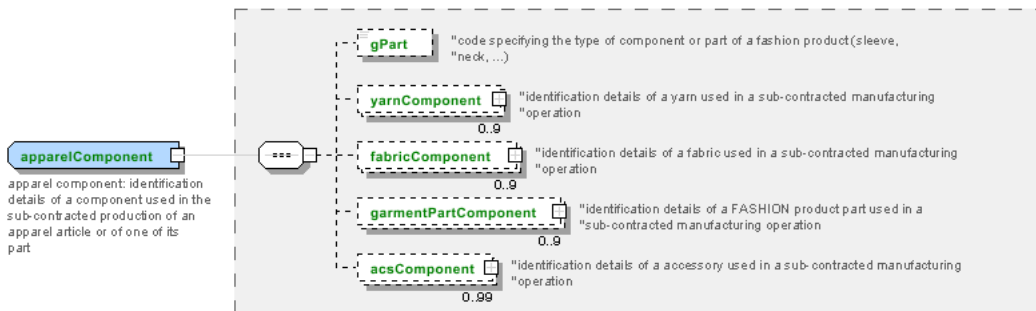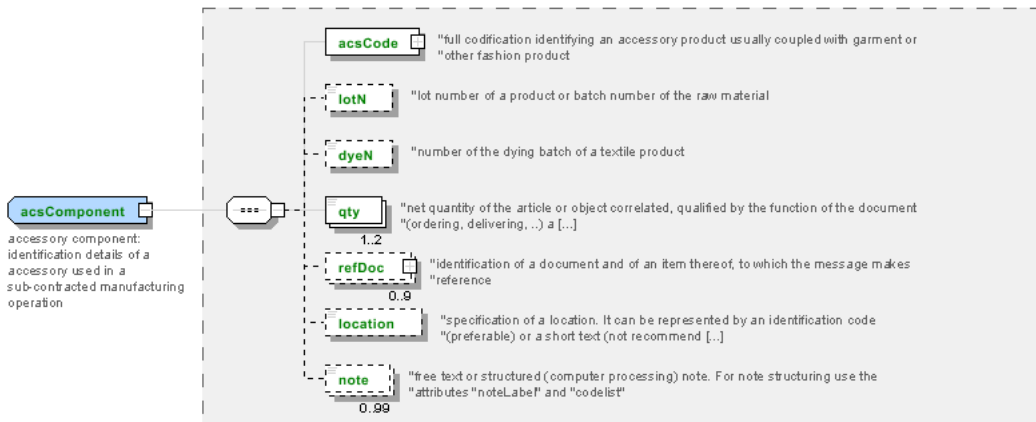

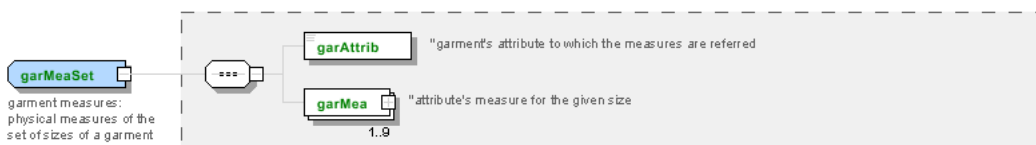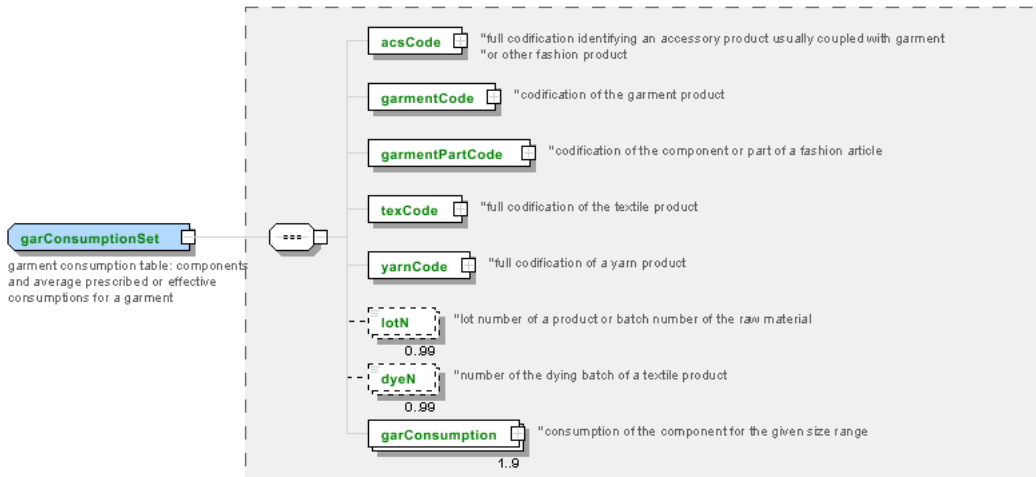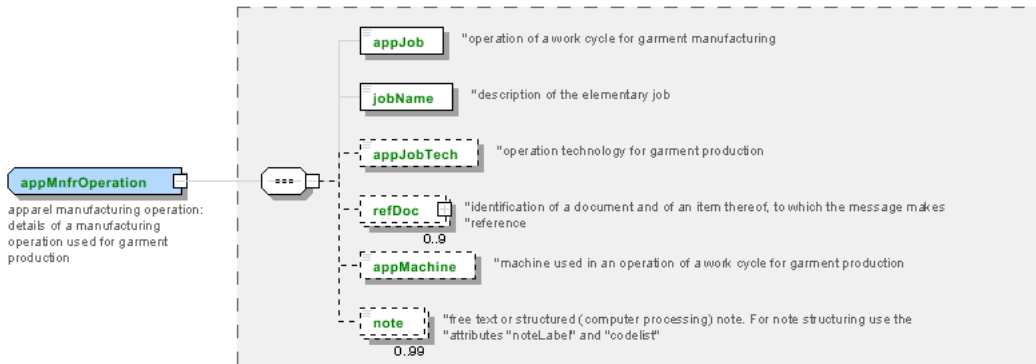

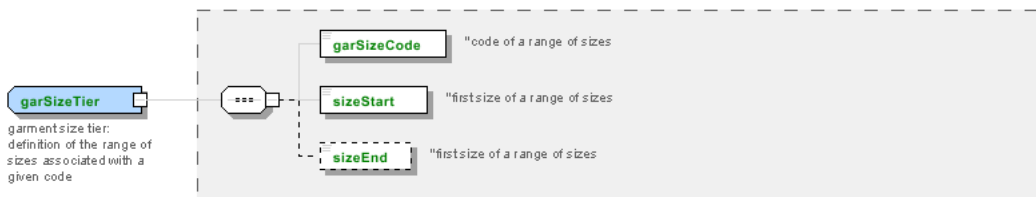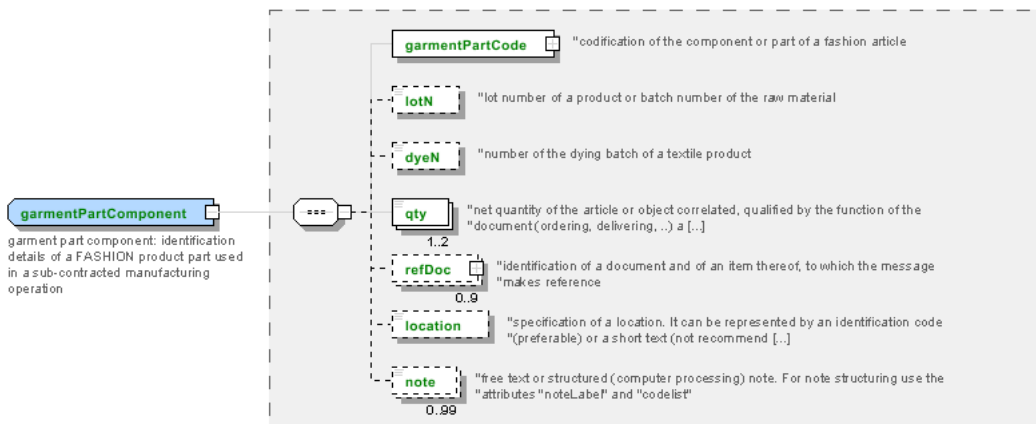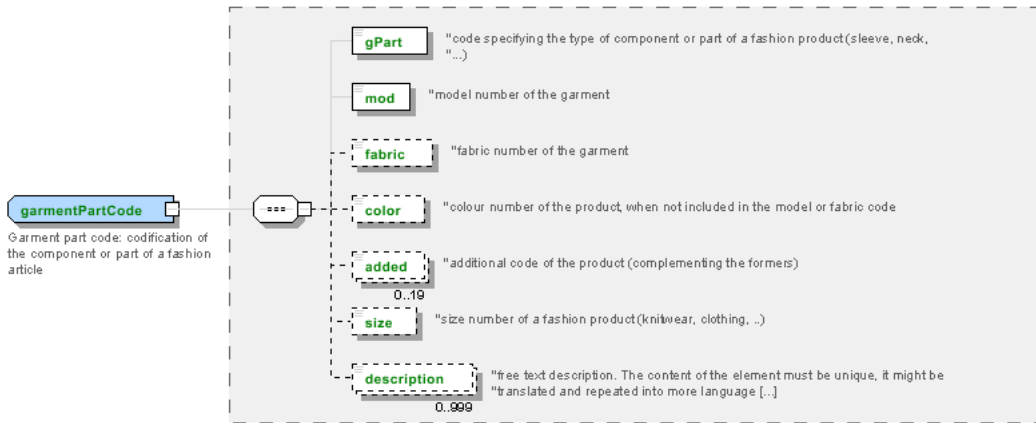




**garTecSheet**  
 garment technical sheet;  
 garment technical sheet



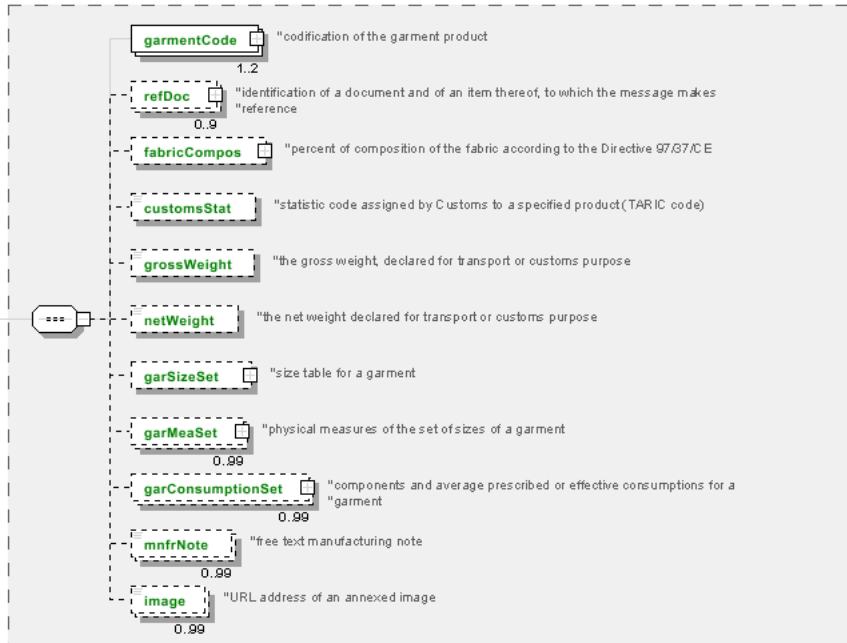


**KCCOheader**  
 KCCO header:  
 header of the  
 document FASHION  
 COMMISSION ORDER





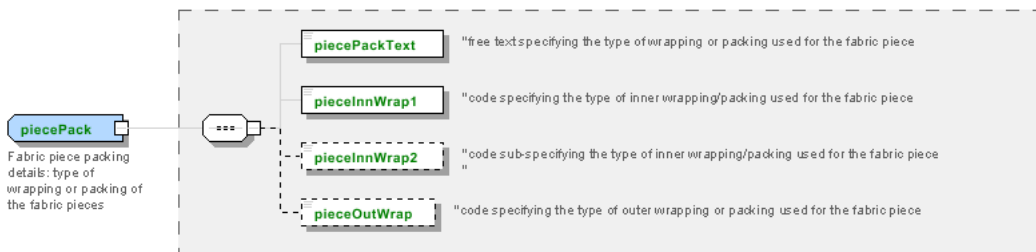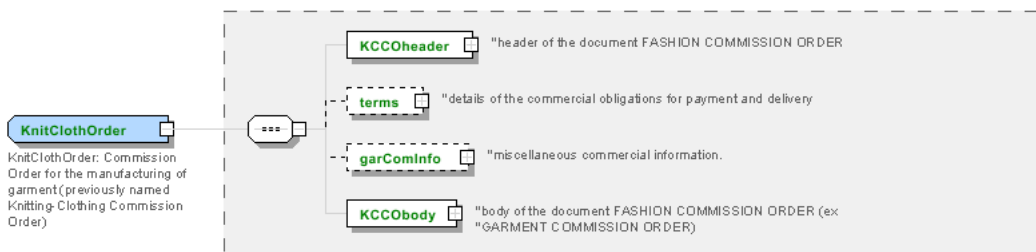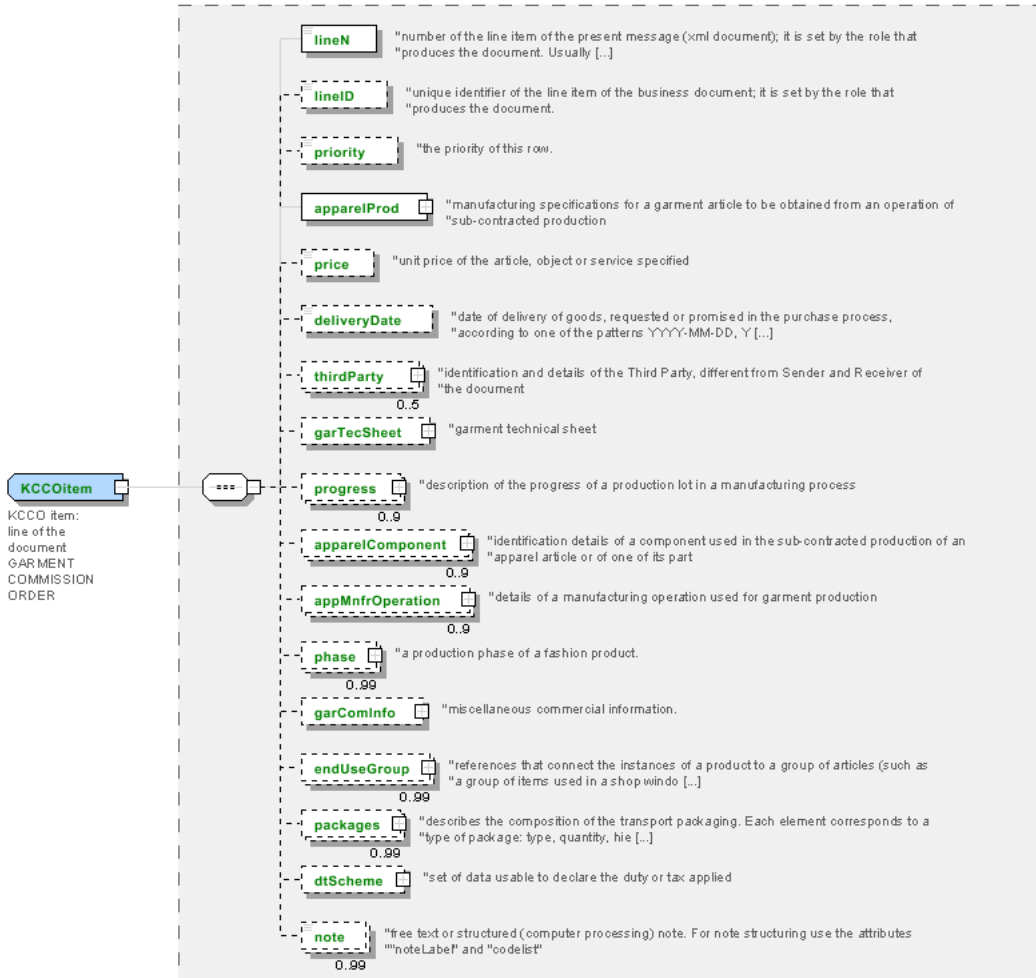

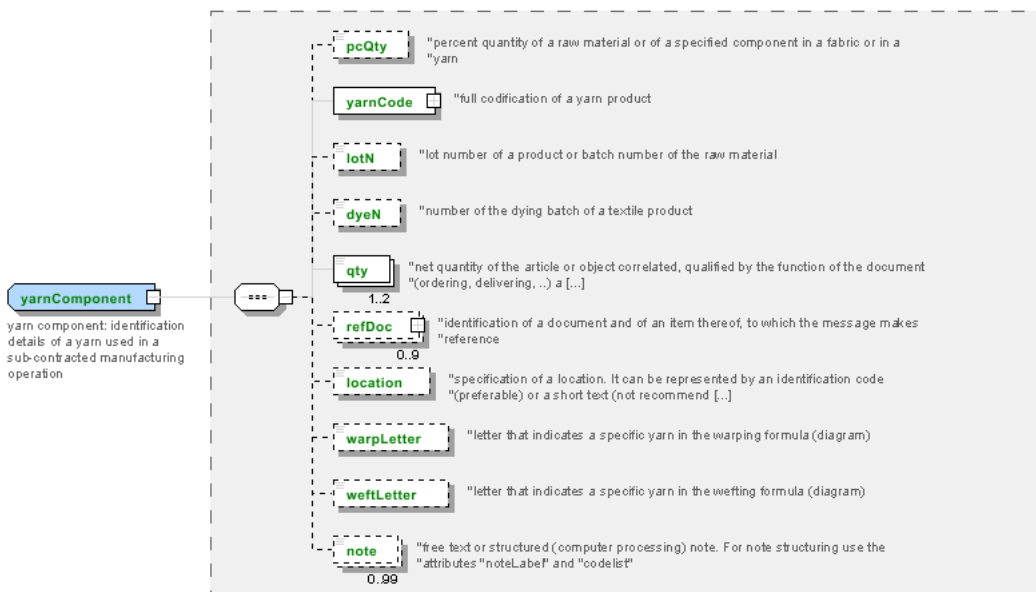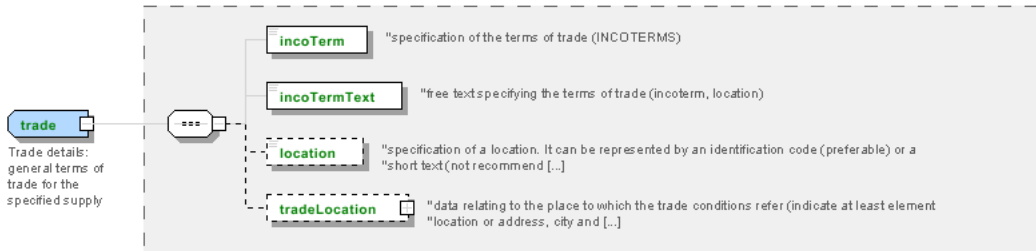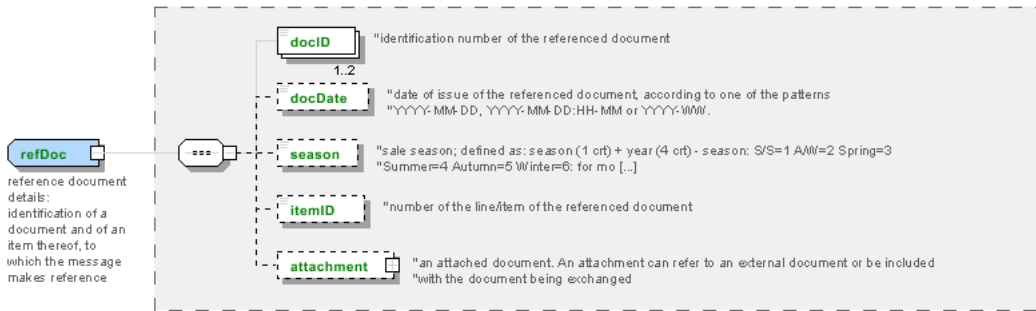



## Annex B

### NT1 - Order type

type of Order

Agency name: eBIZ

Decoding table: NT1

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT1.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT1.xml)

Code	Description	Adoption note	Date of insertion
A	blanket	the order is open without a concrete delivery of product; it establishes an amount of goods to be produced in a future	
D	call-off	orders an amount of goods to be delivered (and invoiced and produced if necessary); it is important that it is clear that this amount should be subtracted from the amount of the blanket order referred in the refDoc element	
P	reservation		
STD	standard		

### NT100 - eBIZ TCFUpstream version

dictionary version

Agency name: eBIZ

Decoding table: NT100

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT100.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT100.xml)

Code	Description	Adoption note	Date of insertion
2013-1	v2013-1		01/07/2013
2018-1	v2018-1		04/11/2018
draft	draft		08/09/2017

### NT11 - transport causal

reason for the transport

Agency name: eBIZ

Decoding table: NT11

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT11.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT11.xml)

Code	Description	Adoption note	Date of insertion
------	-------------	---------------	-------------------

FOC	free of charge		
FRW	return from re-works		
FST	return from storage		
FWW	return from view		
FWK	return from works		
IST	in storage		
NWK	return non-worked		
RJC	return from rejection		
SEL	to sell		
STO	to storage		
VEW	to view		
WRK	to works		

#### NT12 - data source

party who has provided the data

Agency name: eBIZ

Decoding table: NT12

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT12.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT12.xml)

Code	Description	Adoption note	Date of insertion
AC	internal test		
CO	external test		
CV	test after steaming		

#### NT16 - VAT rate or code

VAT rate or code ( DEPRECATED, use dtScheme element )

Decoding table: NT16

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT16.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT16.xml)

#### NT18 - message function

function performed by the present message with regards to the transmission

Agency name: eBIZ

Decoding table: NT18

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT18.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT18.xml)

Code	Description	Adoption	Date of
------	-------------	----------	---------

		<b>note</b>	<b>insertion</b>
CA	delete this document		01/07/2013
CP	copy		
OR	original		
RC	re-transmission for data correction		
RT	re-transmission		

## NT2 - third party qualifier

Third Party role qualifier

Agency name: eBIZ

Decoding table: NT2

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT2.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT2.xml)

<b>Code</b>	<b>Description</b>	<b>Adoption note</b>	<b>Date of insertion</b>
AG	Sales Agent		
AU	Auditor		08/04/2019
BU	Buyer		13/06/2022
CE	Certification authority		08/04/2019
CM	Commissioner		13/06/2022
CO	Quality Controller		
CU	Customs authority		13/06/2022
DC	Response to		
DF	Invoicee		
DI	Copy to (CC)		28/10/2014
DM	Consignee		
DP	Consignment address (Delivery Party)		
EX	Expert		13/06/2022
IM	Importer		
OR	Originator		10/09/2014
SC	Sub contractor		10/04/2019
SM	Service/ePlatform manager		08/04/2019
SP	Forwarder		
SU	Supplier		13/06/2022
TL	Test or analysis laboratory		13/06/2022
TX	Tax Representative		

## NT20 - price qualifier

type of price with reference to discount and taxes

Agency name: eBIZ

Decoding table: NT20

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT20.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT20.xml)

Code	Description	Adoption note	Date of insertion
GET	gross excluding taxes		
GIT	gross including taxes		
NET	net excluding taxes		
NIT	net including taxes		

### NT22 - product type of an operation

level of the product (end or intermediate) yielded by an operation in a work cycle

Agency name: eBIZ

Decoding table: NT22

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT22.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT22.xml)

Code	Description	Adoption note	Date of insertion
END	end-product		
INT	intermediate		

### NT29 - format of a date

format used for the date

Agency name: eBIZ

Decoding table: NT29

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT29.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT29.xml)

Code	Description	Adoption note	Date of insertion
D	YYYY-MM-DD		
M	YYYY-MM-DD:HH-MM (date and time)		
S	AAAA-MM-GG:HH-MM-SS (date and time with seconds)		13/06/2022
W	YYYY-WW		

### NT3 - issuer of the identifier (or identification system) of a location.

List of possible issuers of the identifier (or identification system) of a location.

Agency name: eBIZ

Decoding table: NT3

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT3.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT3.xml)

Code	Description	Adoption note	Date of insertion
EN4	GS1-GLN	obsolete	01/07/2013
GLN	GS1-GLN	equivalent to EN4	25/04/2023
MD	mutually agreed		
NCA	National custom authority	identifier of a bonded warehouse assigned by the custom authority	19/05/2023
PLA	Platform	internal coding of the involved platform	14/05/2023
TRI	TRICK		14/05/2023

### NT324 - propulsion system type

propulsion system type adopted, for example, by a transport mean

Agency name: eBIZ for TRICK

Decoding table: NT324

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT324.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT324.xml)

Code	Description	Adoption note	Date of insertion
ALC	Alcohol		05/07/2022
BDIE	Bio diesel		05/07/2022
BEV	Battery Electric Vehicle		05/07/2022
BFUE	Biofuels	biodiesel excluded	02/09/2022
DIE	Diesel		05/07/2022
FCEV	Hydrogen Fuel cell		05/07/2022
GAS	GAS		05/07/2022
GPL	LPG		05/07/2022
HEV	Full hybrid (Hybrid Electric Vehicle)		05/07/2022
HUM	Human force		05/07/2022
HYB	Hybrid		05/07/2022
MHY	Mild hybrid		05/07/2022
NUC	Nuclear		05/07/2022
PET	Petrol		05/07/2022
PHEV	plug-in Hybrid Electric Vehicle		05/07/2022
STEAM	Steam		05/07/2022
WIND	Wind		05/07/2022



### NT329 - type of validation method of the value

indicates the type of method used to validation and calculate the quantity to which it refers; used to express the data faithfulness

Agency name: eBIZ

Decoding table: NT329

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT329.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT329.xml)

Code	Description	Adoption note	Date of insertion
CER	third party certification		11/06/2023
EST	estimate		12/05/2023
EXP	confirmed by an expert		19/05/2023
LAB	laboratory test		11/06/2023
LIT	literature	refer to a literature analysis outcome	12/05/2023
MON	monitoring	refer to continuous measurement in field	12/05/2023
REV	confirmed by review		11/06/2023
SAM	sampling	refer to a sample measurement in field	12/05/2023
SUP	supplier declaration		11/06/2023

### NT333 - type of hashing algorithm

type of hashing algorithm

Decoding table: NT333

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT333.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT333.xml)

Code	Description	Adoption note	Date of insertion
ADLER32	ADLER32		26/05/2023
HMAC	HMAC		26/05/2023
MD2	MD2		26/05/2023
MD4	MD4		26/05/2023
MD5	MD5		26/05/2023
MDC-2	MDC-2		26/05/2023
PANAMA	PANAMA		26/05/2023
RIPEMD-160	RIPEMD-160		26/05/2023
SHA-1	SHA-1		26/05/2023
SHA-2 256	SHA-2 256		26/05/2023
SHA-2 384	SHA-2 384		26/05/2023
SHA-2 512	SHA-2 512		26/05/2023
TIGER	TIGER		26/05/2023

### NT37 - committed quantity qualifier

specifies if the committed quantity can or can not include the loss in weight

Agency name: eBIZ

Decoding table: NT37

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT37.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT37.xml)

Code	Description	Adoption note	Date of insertion
NS	quantity can include losses		
SA	quantity can not include losses		

### NT39 - consumption type

indicates what the indicated consumption quantity is referred to

Agency name: eBIZ

Decoding table: NT39

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT39.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT39.xml)

Code	Description	Adoption note	Date of insertion
BOL	required quantity to obtain the indicated total amount of product (Bill of Loading)		25/07/2018
BOM	required quantity for unit of product (Bill of material)		25/07/2018

### NT4 - end use

specifies the final use of the product

Agency name: eBIZ

Decoding table: NT4

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT4.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT4.xml)

Code	Description	Adoption note	Date of insertion
PC	test piece		
PR	production		
SA	Sample		10/09/2014
SC	samples card		
TI	patch		
TP	(test cut)		

### NT40 - manufacturing note qualifiers

qualifier of the product treated in the note

Agency name: eBIZ

Decoding table: NT40

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT40.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT40.xml)

Code	Description	Adoption note	Date of insertion
AD	adhesives		
BT	buttons		
CU	seams		
IB	packing		
LA	washing		
ST	ironing		

### NT41 - garment attributes

garment's attribute to which the measures are referred

Agency name: eBIZ

Decoding table: NT41

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT41.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT41.xml)

Code	Description	Adoption note	Date of insertion
C	neck center sleeve length		
CL	neck		
CV	crotch		
E	under-sleeve length		
F	raglan in front		
FC	hips		
G	muscle		
GM	sleeve ride		
H	bottom edge height		
I	cuff height		
L	neck edge height		
LG	width		
LM	sleeve length		
LN	length		
M	neck opening		

N	coppino		
O	sleeve width to 10 cm		
P	bottom width		
SP	shoulders		
VT	waist		

#### NT43 - operational code qualifier

Agency name: eBIZ

Decoding table: NT43

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT43.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT43.xml)

Code	Description	Adoption note	Date of insertion
1	event		08/09/2017
2	sales channel		08/09/2017
3	goods management type		08/09/2017
4	special initiative		08/09/2017

#### NT51 - Filling Criterion for Package homogeneity

Filling Criterion for Package homogeneity

Agency name: eBIZ

Decoding table: NT51

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT51.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT51.xml)

Code	Description	Adoption note	Date of insertion
COL	Colour		08/09/2017
MOD	Model		08/09/2017
SIZ	Size		08/09/2017

#### NT6 - coding system owner/issuer

code specifying the organisation who has created or owns the registers of the present coding or numbering system

Agency name: eBIZ

Decoding table: NT6

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT6.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT6.xml)

Code	Description	Adoption note	Date of insertion

CBR	National customs brokers registry		12/06/2023
CL	Customer/buyer		
CO	Quality Controller		
DU	D-U-N-S registry (Data Universal Numbering System)		04/05/2023
EB	eBIZ	replaces 'ML'	18/03/2019
EN	GS1 ( ex-EAN International )		
EO	Registro EORI (Economic Operators Registration and Identification number)		04/03/2023
ES	e-Stockflow	DEPRECATED	
FO	Supplier		
GS	GS1		01/07/2013
MF	national taxation authority (i.e. VAT codes registry)		
ML	Moda-ML	DEPRECATED	
PL	Application Platform		13/06/2022
REX	Registered Exporter system (REX)		19/05/2023
SP	Service Provider		
SU	Enterprise Identification Number UID	Only switzerland	04/03/2023

#### NT60 - language, codes from ISO 639-1 (subset)

Agency name: eBIZ / ISO

Decoding table: NT60

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT60.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT60.xml)

Code	Description	Adoption note	Date of insertion
af	Afrikaans		31/01/2019
ar	Arabic		31/01/2019
be	Belarusian		31/01/2019
bg	Bulgarian		31/01/2019
bn	Bengali		31/01/2019
bo	Tibetan		31/01/2019
bs	Bosnian		31/01/2019
ca	Catalan, Valencian		31/01/2019
cs	Czech		31/01/2019
da	Danish		31/01/2019
de	German		31/01/2019
el	Greek, Modern (1453-)		31/01/2019
en	English		31/01/2019
eo	Esperanto		31/01/2019

es	Spanish, Castilian		31/01/2019
et	Estonian		31/01/2019
eu	Basque		31/01/2019
F	Female		15/04/2019
fa	Persian		31/01/2019
fi	Finnish		31/01/2019
fr	French		31/01/2019
ga	Irish		31/01/2019
gd	Gaelic, Scottish Gaelic		31/01/2019
gn	Guarani		31/01/2019
he	Hebrew		31/01/2019
hr	Croatian		31/01/2019
ht	Haitian, Haitian Creole		31/01/2019
hu	Hungarian		31/01/2019
hy	Armenian		31/01/2019
ia	Interlingua (International Auxiliary Language Association)		31/01/2019
id	Indonesian		31/01/2019
is	Icelandic		31/01/2019
it	Italian		31/01/2019
ja	Japanese		31/01/2019
jv	Javanese		31/01/2019
ka	Georgian		31/01/2019
km	Central Khmer		31/01/2019
ko	Korean		31/01/2019
ku	Kurdish		31/01/2019
lb	Luxembourgish, Letzeburgesch		31/01/2019
lo	Lao		31/01/2019
lt	Lithuanian		31/01/2019
lv	Latvian		31/01/2019
mg	Malagasy		31/01/2019
mk	Macedonian		31/01/2019
mn	Mongolian		31/01/2019
mt	Maltese		31/01/2019
nl	Dutch, Flemish		31/01/2019
no	Norwegian		31/01/2019
pl	Polish		31/01/2019
pt	Portuguese		31/01/2019
ro	Romanian, Moldavian, Moldovan		31/01/2019

ru	Russian		31/01/2019
se	Northern Sami		31/01/2019
sk	Slovak		31/01/2019
sl	Slovenian		31/01/2019
sm	Samoan		31/01/2019
so	Somali		31/01/2019
sq	Albanian		31/01/2019
sr	Serbian		31/01/2019
sv	Swedish		31/01/2019
sw	Swahili		31/01/2019
ta	Tamil		31/01/2019
th	Thai		31/01/2019
tr	Turkish		31/01/2019
uk	Ukrainian		31/01/2019
ur	Urdu		31/01/2019
uz	Uzbek		31/01/2019
vi	Vietnamese		31/01/2019
zh	Chinese		31/01/2019

#### NT7 - unit of measure

specification of the unit of measure, it is a sub set of table Unit of Measure Code - UN/ECE REC 20 delivered by United Nations Economic Commission for Europe (UN/ECE)

Agency name: eBIZ / UN/ECE

Decoding table: NT7

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_NT7.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_NT7.xml)

Other link: <http://docs.oasis-open.org/ubl/os-UBL-2.1/cl/gc/default/UnitOfMeasureCode-2.1.gc#>

Code	Description	Adoption note	Date of insertion
CMK	square centimetre		20/12/2017
CMQ	cubic centimetre		20/12/2017
CMT	centimetre		
CNE	centiNewton		
CO2TON	ton of CO2		10/09/2014
COUPLES	couples		
DAY	day		22/08/2022
DEGD	decimal degrees		04/07/2022
DEGMS	degrees with minutes and seconds		01/07/2022
DMQ	cubic decimetre		

E37	pixel		11/04/2018
GRM	gram		
HUR	hour		
INH	inch		
KGM	kilogram		
KMT	kilometer		
KWH	kilowatthours		10/09/2014
LBR	pound		
MCG	microgram		23/08/2022
MG	milligram		23/08/2022
MIN	minute		
MMK	square millimetre		20/12/2017
MONTH	month		22/08/2022
MSEC	millisecond (time)		22/08/2022
MTK	square metre		20/12/2017
MTQ	cubic metre		
MTR	metre		
NMB	numero		
ONZ	ounce		
P1	percent		
PPM	parts per milion		
PZ	piece		
RPM	rounds per metre		
SEC	second (time)		22/08/2022
YEAR	year		22/08/2022
YRD	yard		

### T1 - terms of payment

code specifying the terms or time by which the payment must be done

Agency name: eBIZ

Decoding table: T1

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T1.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T1.xml)

Code	Description	Adoption note	Date of insertion
ANTICIP	PAYMENT IN ADVANCE		
BLCOLLECT/120D	BILL OF LADING 120 DD		
BLCOLLECT/30D	BILL OF LADING 30 DD		



BLCOLLECT/60D	BILL OF LADING 60 DD		
BLCOLLECT/90D	BILL OF LADING 90 DD		
CASH	PAYMENT ON DELIVERY		
CASHINV	PAYMENT ON RECEIPT OF INVOICE		
CREDOC/0D	DOCUMENTARY CREDIT FOR PAYM. AT SIGHT		
CREDOC/120	DOCUMENTARY CREDIT FOR PAYM. AT 120 DD		
CREDOC/150	DOCUMENTARY CREDIT FOR PAYM. AT 150 DD		
CREDOC/180	DOCUMENTARY CREDIT FOR PAYM. AT 180 DD		
CREDOC/30D	DOCUMENTARY CREDIT FOR PAYM. AT 30 DD		
CREDOC/45D	DOCUMENTARY CREDIT FOR PAYM. AT 45 DD		
CREDOC/60	DOCUMENTARY CREDIT FOR PAYM. AT 60 DD		
CREDOC/90	DOCUMENTARY CREDIT FOR PAYM. AT 90 DD		
DEL/10	PAYMENT AT 10 DD AFTER DELIVERY		
DOCOLLECT/120D	DOCUMENTARY COLLECTION AT 120 DD		
DOCOLLECT/30D	DOCUMENTARY COLLECTION AT 30 DD		
DOCOLLECT/60D	DOCUMENTARY COLLECTION AT 60 DD		
DOCOLLECT/90D	DOCUMENTARY COLLECTION AT 90 DD		
INV/120D	PAYMENT AT 120 DD AFTER RECEIPT OF INVOICE		
INV/150D	PAYMENT AT 150 DD AFTER RECEIPT OF INVOICE		
INV/180D	PAYMENT AT 180 DD AFTER RECEIPT OF INVOICE		
INV/30D	PAYMENT AT 30 DD AFTER RECEIPT OF INVOICE		
INV/45D	PAYMENT AT 45 DD AFTER RECEIPT OF INVOICE		
INV/60D	PAYMENT AT 60 DD AFTER RECEIPT OF INVOICE		
INV/90D	PAYMENT AT 90 DD AFTER RECEIPT OF INVOICE		
INVULTIMO	PAYMENT AT END MONTH RECEIPT INVOICE		
INVULTIMO/10D	PAYMENT 10 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/120D	PAYMENT 120 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/150D	PAYMENT 150 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/180D	PAYMENT 180 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/240D	PAYMENT 240 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/30D	PAYMENT 30 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/45D	PAYMENT 45 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/60D	PAYMENT 60 DD AFTER END MONTH RECEIPT INVOICE		
INVULTIMO/90D	PAYMENT 90 DD AFTER END MONTH RECEIPT INVOICE		
NOPAY	WITHOUT PAYMENT		
RECREDOC/0D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT SIGHT		
RECREDOC/120D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 120 DD		
RECREDOC/150D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 150 DD		

RECREDOC/180D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 180 DD		
RECREDOC/30D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 30 DD		
RECREDOC/45D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 45 DD		
RECREDOC/60D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 60 DD		
RECREDOC/90D	IRREVOC. DOCUMENTARY CREDIT FOR PAYM. AT 90 DD		
ULTIMO	PAYMENT BY END MONTH OF DELIVERY		
ULTIMO/10	PAYMENT AT 10 DD AFTER END MONTH OF DELIVERY		

### T10 - ISO3166 - Country

code of the nation

Agency name: ISO

Decoding table: T10

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T10.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T10.xml)

Table not printed: there are 240 elements, more than the maximum specified for printing: 99.

### T11 - transport package type

code specifying the type of package used for transport and delivery (subset of UN/ECE 8053 and UBL TransportEquipmentTypeCode-2.1)

Agency name: eBIZ

Decoding table: T11

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T11.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T11.xml)

Other link: <http://docs.oasis-open.org/ubl/os-UBL-2.1/cl/gc/default/TransportEquipmentTypeCode-2.1.gc#>

Code	Description	Adoption note	Date of insertion
4A	box, steel		
4C	box, wood		
4G	Box, fibreboard		01/08/2018
4H	Box, plastic		01/08/2018
5H	Bag, woven plastic		01/08/2018
5L	Bag, textile		01/08/2018
5M	Bag, paper		
AJ	Cone		01/08/2018
BL	Bale, compressed		01/08/2018
BN	Bale, non-compressed		01/08/2018
BX	Box		
CI	Canister		01/08/2018
CL	Coil		01/08/2018

CN	Container, not otherwise specified as transport equipment		01/08/2018
CS	Case		01/08/2018
CT	Carton		01/08/2018
EC	Bag, plastic		01/08/2018
ED	Case, with pallet base		01/08/2018
EE	Case, with pallet base, wooden		01/08/2018
EF	Case, with pallet base, cardboard		01/08/2018
EG	Case, with pallet base, plastic		01/08/2018
EH	Case, with pallet base, metal		01/08/2018
FX	Bag, flexible container		01/08/2018
HN	Hanger		01/08/2018
NE	unpacked		
NF	Unpacked or unpackage, single unit		01/08/2018
NG	Unpacked or unpackage, multiple units		01/08/2018
OA	Pallet, CHEP 40 cm x 60 cm		01/08/2018
OB	Pallet, CHEP 80 cm x 120 cm		01/08/2018
OC	Pallet, CHEP 100 cm x 120 cm		01/08/2018
OD	Pallet, AS 4068-1993		01/08/2018
OE	Pallet, ISO T11		01/08/2018
PE	europallet (80x120)		
PX	pallet		
QS	box, plastic, solid		
RJ	Rack, clothing hanger		01/08/2018
RL	Reel		01/08/2018
SO	Spool		01/08/2018
TU	tube		
XD	bag, plastics film		
XK	bag,paper, multi-wall, water resistant		
ZZ	Mutually defined		01/08/2018

### T19 - fibre type

type of fibre used in a textile product

Agency name: eBIZ

Decoding table: T19

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T19.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T19.xml)

Code	Description	Adoption note	Date of insertion
------	-------------	---------------	-------------------

AB	abaca		20/08/2018
AC	acetate		
AF	other fibres		
AG	alginic fibre		
AL	alfa		20/08/2018
AR	aramid		25/04/2022
CA	hemp		
CC	coir (coconut)		20/08/2018
CL	chlorofibre		
CO	cotton		
CU	cuprous		
EA	elastan		
EF	elastolefin		25/04/2022
EL	Elastodiene		20/08/2018
EM	elastomultiester		25/04/2022
FL	fluorofibre		
GI	broom		20/08/2018
GL	textile glass		
HA	hair		20/08/2018
HE	henequen		20/08/2018
HL	mixed linen		
JU	jute		
KE	kenaf		20/08/2018
KP	kapoc		20/08/2018
LI	linen		
LY	lyocell		20/08/2018
MA	modacrylic		
MD	modal		
ME	metallized		
MG	maguey		20/08/2018
MM	melamine		25/04/2022
PA	polyamide		
PB	polyureic		
PC	acrylic		
PE	polyethylene		
PI	paper		20/08/2018
PL	polyester		
PM	polyimide		

PO	polilactyd		25/04/2022
PP	polypropylene		
PR	proteic		
PU	polyurethane		
RA	ramie		20/08/2018
SE	silk		
SI	sisal		20/08/2018
SN	sun		20/08/2018
TA	triacetate		
TR	textile residues or unspecified composition		20/08/2018
TV	trivinyll		
VI	viscose		
VY	vinylal		
WA	angora		
WB	beaver		20/08/2018
WC	cashgora		
WG	vicuna		
WK	camel		
WL	llama		
WM	mohair		
WN	lapin		20/08/2018
WO	wool		
WP	alpaca		
WS	cashmere		
WT	Oteer		20/08/2018
WU	guanaco		
WV	virgin wool		
WY	yack		

## T2 - Modes of payment

way or means of payment

Agency name: eBIZ

Decoding table: T2

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T2.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T2.xml)

Code	Description	Adoption note	Date of insertion
BB	bank transfer		

IA	collection through Agent		
IS	collection through Forwarder		
RB	bank receipt		
RD	remittance		
SW	bank SWIFT		
TR	bank draft		

### T205 - type of job in knitting/clothing

operation of a work cycle for knitting/clothing

Agency name: eBIZ

Decoding table: T205

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T205.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T205.xml)

Code	Description	Adoption note	Date of insertion
10	cutting		
20	sewing		
30	manufacturing		
40	washing		
50	ironing		
60	packing		

### T21 - type of document

type or class to which the referenced document belongs

Agency name: eBIZ

Decoding table: T21

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T21.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T21.xml)

Code	Description	Adoption note	Date of insertion
BIL	Bill of lading		07/03/2023
BOR	Blanket order		01/02/2018
CAT	Price catalogue - tech sheet		
CEO	Certificate of origin		13/04/2018
CER	Certificate		13/04/2018
CMR	CMR consignment note		07/03/2023
COC	Colour card		
CRN	Credit note		08/09/2017

CTO	Checking order		01/07/2013
CTR	Contract		
CXF	CxF3 file		01/07/2013
DAD	Darn order		
DDT	Delivery note (transport document)		
DEA	Despatch advise		
DER	Despatch request		
DR	Document Request		02/12/2014
EAD	Export Accompanying Document	adopted by European customs	12/05/2023
ECMR	electronic CMR consignment note		07/03/2023
ECUS	EXPORT Custom Declaration		07/03/2023
FOR	Forecast		02/12/2014
GSO	Garment stock offer		
GSX	Garment stock offer change		
ICUS	IMPORT Custom Declaration		07/03/2023
INV	Invoice		
KCC	Knitting-Clothing Commission Order		02/12/2014
KCI	Garment in Work Inventory Report		02/12/2014
LCA	LCA study		28/08/2022
LCAD	LCA study dataset		28/08/2022
M2M	Made to Measure Production Order		02/12/2014
MAS	Master marker		
MCI	Visual merchandising instruction		13/04/2018
OCH	Order change		
OFF	Offer		
ORD	Purchase order		
ORP	Order response		
OSR	order status request		
OSS	Offer status		02/12/2014
OST	Order status		
OUR	our reference		
PCO	Preferential certificate of origin		07/03/2023
PEF	PEF study		28/08/2022
PEFD	PEF study dataset		28/08/2022
PEFP	PEF environmental profile		07/03/2023
QR	Quality Report		02/12/2014
RAI	Raw Material in Work Inventory Report		02/12/2014
RDC	Raw dyeing commission order		

RDH	Raw dyeing order change		
RDR	Raw dyeing order response		
REA	Receiving advise		
REQ	Request for Offer		
RET	Return		02/12/2014
RSC	Spinning commission order		
RSH	Spinning order change		
RSR	Spinning order response		
SAD	Single Administrative Document	adopted by European customs	12/05/2023
SCL	Process sheet		
SDE	Self-declaration		07/03/2023
SDS	SDS - Safety data sheet		07/03/2023
SLCA	S-LCA Study		07/03/2023
SLCAD	S-LCA Study documentation		07/03/2023
TFC	Textile dyeing-finishing commission order		
TFX	Textile Dyeing-Finishing Order Change		02/12/2014
TPC	Textile printing commission order		
TPX	Textile Printing Order Change		02/12/2014
TWI	Textile in work inventory		
VMI	visual merchandising instructions		01/02/2018
WAC	Warping commission order		
WAYB	Waybill		07/03/2023
WEC	Weaving commission order		
YDC	Yarn dyeing commission order		
YDH	Yarn dyeing order change		
YDR	Yarn dyeing order response		
YTC	Twisting commission order		
YWI	Yarn in work inventory		

### T265 - type of job technology in knitting/clothing

operation technology for knitting/clothing

Agency name: eBIZ

Decoding table: T265

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T265.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T265.xml)

Code	Description	Adoption note	Date of insertion
00	to be developed		



### T275 - type of machine for knitting/clothing

machine used in an operation of a work cycle for knitting/clothing

Agency name: eBIZ

Decoding table: T275

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T275.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T275.xml)

Code	Description	Adoption note	Date of insertion
PF	PAFF		

### T29 - type of yarn package

type of package (roll-up) used for a yarn product

Agency name: eBIZ

Decoding table: T29

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T29.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T29.xml)

Code	Description	Adoption note	Date of insertion
CIL	bobbin		
CON	cone		
HNK	hank, skein		01/07/2013
MUF	muff, cake		01/07/2013
SPL	spool		
TUB	tube		
XCO	supercone		

### T3 - terms of delivery - Incoterms

specification of the terms of trade (INCOTERMS)

Agency name: Incoterms

Decoding table: T3

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T3.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T3.xml)

Other link: <https://iccwbo.org/resources-for-business/incoterms-rules/incoterms-2020/#>

Code	Description	Adoption note	Date of insertion
CF R	COST AND FREIGHT (named port of destination)		
CIF	COST, INSURANCE AND FREIGHT (named port of		

	destination)		
CIP	CARRIAGE AND INSURANCE PAID (named place of destination)		
CP T	CARRIAGE PAID (named place of destination)		
DA F	DELIVERED AT FRONTIER (named place)	according to Incoterms® 2010, since 2020 it is OBSOLETE.	08/12/2017
DA P	Delivered at Place of destination (named place of destination)	according to Incoterms® 2010	08/12/2017
DA T	Delivered at Terminal (named place of destination)	according to Incoterms® 2010, since 2020 it is OBSOLETE.	08/12/2017
DD P	DELIVERED DUTY PAID (named place of destination)		
DD U	DELIVERED DUTY UNPAID (named place of destination)	according to Incoterms® 2010 it is OBSOLETE, use DAP	08/12/2017
DE Q	DELIVERED EX-QUAY (named port of destination)	according to Incoterms® 2010 it is OBSOLETE	08/12/2017
DE S	DELIVERED EX-SHIP (named port of destination)	according to Incoterms® 2010 it is OBSOLETE	08/12/2017
DP U	DELIVERED AT PLACE UNLOADED	according to Incoterms® 2020	25/04/2022
EX W	EX WORKS (named place)		
FAS	FREE ALONGSIDE SHIP (named port of shipment)		
FC A	FREE CARRIER (named place)		
FO B	FREE ON BOARD (named port of shipment)		

### T30 - support of yarn package - material

type of material of which a package for yarn is made

Agency name: eBIZ

Decoding table: T30

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T30.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T30.xml)

Code	Description	Adoption note	Date of insertion
CA	cartoon		
DY	for soft package dyeing		
MT	metallic		01/07/2013
PL	plastic		

### T306 - material circularity attribute

Indicates whether the material is virgin or comes from recycling or reuse processes

Agency name: eBIZ for TRICK

Decoding table: T306

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T306.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T306.xml)

Code	Description	Adoption note	Date of insertion
REU	Reused material		30/08/2022
SCL	Secondary raw materials	adopt this for any secondary raw material when information about the first or following loop is not available	22/07/2022
SCL1	Secondary raw materials - first loop		22/07/2022
SCLx	Secondary raw materials - loop following the first one		22/07/2022
VRG	Virgin raw material	adopt this for any virgin raw material when biobased information is not available	22/07/2022
VRGB	Virgin raw material - biobased		23/03/2023
VRGN	Virgin raw material - not biobased		23/03/2023

### T307 - recycling process method

Agency name: eBIZ for TRICK

Decoding table: T307

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T307.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T307.xml)

Code	Description	Adoption note	Date of insertion
CHMD	chemical recycling (dissolution)		28/07/2022
CHMP	chemical recycling (depolymerization)		28/07/2022
ENZ	enzymatic recycling		01/09/2022
MEC	mechanical recycling		28/07/2022
THE	thermal recycle		31/08/2022
THMC	thermo-mechanical recycling		01/09/2022

### T32 - yarn reel wrapping type

type of wrapping in which a package of yarn is wrapped

Agency name: eBIZ

Decoding table: T32

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T32.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T32.xml)

Code	Description	Adoption note	Date of insertion
XA	without bag		
XB	paper bag		01/07/2013
XD	plastic film bag		

### T33 - yarn outer packing

code specifying the type of outer wrapping or packing of a yarn

Agency name: eBIZ

Decoding table: T33

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T33.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T33.xml)

Code	Description	Adoption note	Date of insertion
00			
CB	cartoon box		
CC	cartoon box 18 reels		
CD	cartoon box 36 reels		
XD	plastic film		

### T38 - transport conditions

special condition of transport or special service requested to the Forwarder

Decoding table: T38

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T38.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T38.xml)

Code	Description	Adoption note	Date of insertion
ACC	arrange customs clearance		
CAL	Carrier loads		
CAU	Carrier unloads		
CMR	CMR carnet		
FFN	freight forwarders national conditions		
FLD	special agreement for full loading		
NCC	do not arrange customs clearance		
PPB	packaging paid by Buyer		
PPS	packaging paid by Supplier		
PRO	proof of delivery		
RFR	return container free		
RPC	return container paid by Customer		

RPS	return container paid by Supplier		
SHL	Shipper loads		
SHU	Consignee unloads		

#### T4 - fabric piece inner packing (wrapping) 1

code specifying the type of inner wrapping/packing used for the fabric piece

Agency name: eBIZ

Decoding table: T4

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T4.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T4.xml)

Code	Description	Adoption note	Date of insertion
A	Folded, whole width		
B	Folded, doubled		
C	Folded, tube products		
D	Spoiled, whole width		
E	Spoiled, doubled, pli: left		
F	Spoiled, doubled, pli: right		
G	Rolled, whole width, single item		
H	Rolled, whole width, several items		
I	Rolled, doubled		
J	Rolled, tube products		

#### T40 - type of transport means

means of transport, in general or referred to a specific leg

Agency name: eBIZ

Decoding table: T40

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T40.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T40.xml)

Code	Description	Adoption note	Date of insertion
AIR	aircraft		
SHP	ship		
TRU	truck		
VAN	van		

#### T41 - type of Allowance or Charge

coded specification of an Allowance or Charge (elaborated from UNECE 4465)

Agency name: eBIZ

Decoding table: T41

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T41.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T41.xml)

Code	Description	Adoption note	Date of insertion
1	Agreed settlement		19/08/2018
10	Costs for draft		19/08/2018
11	Bank charges	DEPRECATED, use CBK	19/08/2018
12	Agent commission		19/08/2018
14	Wrong delivery		19/08/2018
15	Goods returned to agent		19/08/2018
16	Goods partly returned		19/08/2018
17	Transport damage		19/08/2018
19	Trade discount		19/08/2018
2	Below specification goods		19/08/2018
20	Deduction for late delivery	DEPRECATED, use CWB	19/08/2018
21	Advertising costs		19/08/2018
22	Customs duties		19/08/2018
23	Telephone and postal costs		19/08/2018
24	Repair costs		19/08/2018
25	Attorney fees		19/08/2018
26	Taxes		19/08/2018
3	Damaged goods		19/08/2018
30	Direct payment to seller		19/08/2018
32	Goods not delivered		19/08/2018
33	Late delivery		19/08/2018
35	Goods returned		19/08/2018
36	Invoice not received		19/08/2018
37	Credit note to debtor/not to us		19/08/2018
38	Deducted bonus		19/08/2018
39	Deducted discount		19/08/2018
4	Short delivery		19/08/2018
40	Deducted freight costs		19/08/2018
41	Deduction against other invoices		19/08/2018
42	Credit balance(s)		19/08/2018
45	Debit note to seller		19/08/2018
46	Discount beyond terms		19/08/2018
48	Allowance/charge error		19/08/2018

49	Substitute product		19/08/2018
50	Terms of sale error		19/08/2018
52	Wrong invoice		19/08/2018
53	Duplicate invoice		19/08/2018
54	Weight error		19/08/2018
55	Additional charge not authorized		19/08/2018
56	Incorrect discount		19/08/2018
57	Price change		19/08/2018
58	Variation		19/08/2018
59	Chargeback		19/08/2018
65	Settlement to agent		19/08/2018
66	Cash discount		19/08/2018
7	Payment on account		19/08/2018
70	Wrong monetary amount resulting from incorrect free goods quantity		19/08/2018
72	Temporary special promotion		19/08/2018
73	Difference in tax rate		19/08/2018
74	Quantity discount		19/08/2018
75	Promotion discount		19/08/2018
76	Cancellation deadline passed		19/08/2018
77	Pricing discount		19/08/2018
78	Volume discount		19/08/2018
79	Sundry discount		19/08/2018
8	Returnable container charge included		19/08/2018
9	Invoice error		19/08/2018
AWA	bonus for works ahead of schedule		
CBK	bank charges		
CCR	servizio di corriere		
CIN	insurance		
CLB	labelling		
CPK	packing		
CSP	special packing		
CWB	penalty for works behind schedule		

**T421 - size system: nationality**

nation or agency identifying the size system

Agency name: eBIZ

Decoding table: T421

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T421.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T421.xml)

Code	Description	Adoption note	Date of insertion
DE	Germany		
ES	Spain		
EU	Europe		
FR	France		
IT	Italy		
UK	United Kingdom		
US	USA		
XX	International		

#### T422 - size system: market segment

market segment identifying the size system

Agency name: eBIZ

Decoding table: T422

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T422.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T422.xml)

Code	Description	Adoption note	Date of insertion
B	baby		
C	child		
K	kid		
M	man		
U	unisex		
W	woman		

#### T423 - size system: base

base of the size system

Agency name: eBIZ

Decoding table: T423

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T423.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T423.xml)

Code	Description	Adoption note	Date of insertion
1	arab numbers		
2	latin numbers		
3	symbols		



4	letters		
H	height		
L	length		
U	unique		
W	weight		

#### T44 - additional code type

qualifier of the additional coding of a product

Agency name: eBIZ

Decoding table: T44

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T44.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T44.xml)

Code	Description	Adoption note	Date of insertion
CC	colour card		
CL	sales collection		
CO	company identification code		08/09/2017
DY	dye number		
LT	lot number		
MDI	Made in		08/09/2017
MS	manufacturing state		
PKG	packaging		09/09/2014
PL	product line		
RGB	RGB value		
SE	selvedge code		

#### T46 - quantity variance reason

reason for the difference between the two quantities specified by the context

Agency name: eBIZ

Decoding table: T46

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T46.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T46.xml)

Code	Description	Adoption note	Date of insertion
DAM	damaged on receipt		
DIF	different article		
NAC	not acceptable for quality or conformance		
NRC	not received		

## T48 - garment part type

code specifying the type of component or part of a garment (sleeve, neck, ...)

Agency name: eBIZ

Decoding table: T48

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T48.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T48.xml)

Code	Description	Adoption note	Date of insertion
BB	bottom back		01/08/2018
BF	bottom fore/front		01/08/2018
CO	collar		01/08/2018
CU	cuff		01/08/2018
DV	fore		
EM	embroidery		01/08/2018
OC	other component		01/08/2018
PO	pocket		01/08/2018
SC	back		
SL	sleeve		01/08/2018
TB	top back		01/08/2018
TF	top fore/front		01/08/2018

## T5 - fabric piece inner packing (wrapping) 2

code specifying the sub-type of inner wrapping/packing used for the fabric piece

Agency name: eBIZ

Decoding table: T5

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T5.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T5.xml)

Code	Description	Adoption note	Date of insertion
A	Open		
B	Folded once, not looped		
C	Folded twice, not looped		
H	Folded once, looped		
I	Folded twice, looped		
J	Without inner object, right side inside		
K	On carton or spooling plank, right side inside		
L	On spool (for pressure sensitive products), right side inside		

M	Without inner object, left side inside		
N	On carton or spooling plank, left side inside		
O	On spool (for pressure sensitive products), left side inside		
P	Without inner object, right side inside (deprecated code)		
Q	On carton, right side inside		
R	On wooden stick, right side inside		
S	Without inner object, left side inside (deprecated code)		
T	On carton, left side inside		
U	On wooden stick, left side inside		

### T6 - fabric piece outer packing

code specifying the type of outer wrapping or packing used for the fabric piece

Agency name: eBIZ

Decoding table: T6

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T6.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T6.xml)

Code	Description	Adoption note	Date of insertion
0	Not wrapped		
1	Totally wrapped		
2	Wrapped, one side open		
3	Wrapped, both sides open		
4	Wrapped, one side open, with show corner		
5	Wrapped in cartons		
6	Double wrapped		

### T61 - duty or tax or fee type

duty or tax or fee type

Agency name: eBIZ

Decoding table: T61

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T61.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T61.xml)

Code	Description	Adoption note	Date of insertion
BOL	stamp duty		01/07/2013
CUD	customs duty		01/07/2013
ENV	environmental tax		01/07/2013
FRE	no tax		01/07/2013

OTH	other tax charges		01/07/2013
VAT	value added tax		01/07/2013

### T62 - duty or tax or fee category

duty or tax or fee category

Agency name: eBIZ

Decoding table: T62

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T62.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T62.xml)

Code	Description	Adoption note	Date of insertion
AA	lower than standard rate		01/07/2013
E	tax not applicable		01/07/2013
H	higher than standard rate		01/07/2013
O	outside scope of tax		01/07/2013
S	standard rate		01/07/2013
Z	zero rate goods		01/07/2013

### T7 - manufacturing status

code of the manufacturing stage used to describe the progress in the production cycle

Agency name: eBIZ

Decoding table: T7

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T7.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T7.xml)

Code	Description	Adoption note	Date of insertion
000	to be launched		
001	launched		01/07/2013
010	knitted		
020	packed		
090	preparing		01/07/2013
095	prepared		01/07/2013
100	warping		
199	warped		
200	weaving		
299	woven		
300	dyeing		
399	dyed		

400	finishing		
499	finished		
500	printing		
599	printed		
600	darning		
640	preparing for printing		01/07/2013
650	prepared for printing		01/07/2013
660	checking		01/07/2013
670	checked		01/07/2013
700	spinning		
799	spun		
800	twisting		
899	twisted		
900	despatch-ready		
950	despatched		
999	other, see note if any		01/07/2013

#### T8 - Modes of Transport

way of transport, in general or referred to the specified leg. Derived from UNECE Recommendation 28 (see link)

Agency name: eBIZ

Decoding table: T8

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T8.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T8.xml)

Other link: <https://fig.unece.org/contents/recommendation-28.htm#>

Code	Description	Adoption note	Date of insertion
1	MARITIME TRANSPORT		
10	Courier	DEPRECATED	01/07/2013
2	RAIL TRANSPORT		
3	ROAD TRANSPORT		
4	AIR TRANSPORT		
5	MAIL		
6	MULTIMODAL TRANSPORT	example ship + truck. Not used for custom declarations.	13/06/2023
8	INLAND WATER TRANSPORT		
9	MODE UNKNOWN	Includes Own propulsion	13/06/2023

#### T9 - ISO4217 - Currency

currency code

Agency name: ISO

Decoding table: T9

File codes list (Generic code): [http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc\\_T9.xml](http://www.ebiz.enea.it/moda-ml/repository/codelist/draft/gc_T9.xml)

Table not printed: there are 205 elements, more than the maximum specified for printing: 99.